SEASON 2022

Dealer Book



cannondale®



Road

RACE

ENDURANCE

GRAVEL

Road

Race


SystemSix


SuperSix EVO


CAAD13


CAAD Optimo


SuperSix EVO CX


SuperSix EVO SE

Endurance


Synapse Carbon

Gravel


Topstone Carbon


Topstone Carbon Lefty


Topstone

SystemSix Hi-MOD Dura-Ace Di2

Color 1 - Mercury



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C11131U

Frame	SystemSix Hi-MOD Carbon, integrated cable routing w/ Switchplate, SAVE, PF30a, flat mount disc, 12×142 Speed Release thru-axle
Fork	Hi-MOD Carbon, 1-1/8" - 1-1/4" steerer, 12×100mm Speed Release thru-axle, flat mount disc, 55mm offset (47-51cm) 45mm offset (54-62cm)
Rims	HollowGram 64 SL KNØT, Carbon, 20h front, 24h rear, 64mm deep, 21mm IW, tubeless ready
Hubs	(F) HollowGram KNØT, sealed bearing 12×100mm centerlock / (R) HollowGram KNØT, 12×142mm centerlock w/ DT Swiss 240 internals
Spokes	DT Swiss Aerolite, straight-pull
Tires	Vittoria Rubino Pro Speed, 700 × 25c
Pedals	Not included
Crank	Shimano Dura-Ace Di2
Bottom Bracket	Cannondale Alloy PressFit30
Chain	Shimano Dura-Ace Di2
Rear Cogs	Shimano Dura-Ace Di2
Front Derailleur	Shimano Dura-Ace Di2
Rear Derailleur	Shimano Dura-Ace Di2
Shifters	Shimano Dura-Ace Di2
Handlebar	HollowGram KNØT SystemBar, Carbon, 8 deg. pitch adjust
Grips	Cannondale Bar Tape, 3.5mm
Stem	HollowGram KNØT, Alloy w/ cable cover, -17°
Headset	Integrated, 1-1/8" - 1-1/4
Brakes	Shimano Dura-Ace Hydraulic Disc, 160/140mm MT900 Rotors
Brake Levers	Shimano Dura-Ace Di2
Saddle	Fizik Tempo Argo R3, 150mm width, K:ium rails
Seatpost	HollowGram 60 KNØT Carbon, 330mm
Sizes	47, 51, 54, 56, 58, 60, 62
Color 1	Mercury (MRC)

SystemSix Hi-MOD Ultegra Di2

Color 1 - Stealth Gray



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C11231U

Frame	SystemSix Hi-MOD Carbon, integrated cable routing w/ Switchplate, SAVE, PF30a, flat mount disc, 12×142 Speed Release thru-axle
Fork	Hi-MOD Carbon, 1-1/8" - 1-1/4" steerer, 12×100mm Speed Release thru-axle, flat mount disc, 55mm offset (47-51cm) 45mm offset (54-62cm)
Rims	HollowGram 64 KNØT, Carbon, 20h front, 24h rear, 64mm deep, 21mm IW, tubeless ready
Hubs	(F) HollowGram KNØT, sealed bearing 12×100mm centerlock / (R) HollowGram KNØT, 12×142mm centerlock w/ DT Swiss 350 internals
Spokes	HollowGram, 2.0/1.8/2.0, straight-pull
Tires	Vittoria Rubino Pro Speed, 700 × 25c
Pedals	Not included
Crank	Shimano Ultegra
Bottom Bracket	Cannondale Alloy PressFit30
Chain	Shimano Ultegra
Rear Cogs	Shimano Ultegra Di2
Front Derailleur	Shimano Ultegra Di2
Rear Derailleur	Shimano Ultegra Di2
Shifters	Shimano Ultegra Di2
Handlebar	HollowGram KNØT SystemBar, Carbon, 8 deg. pitch adjust
Grips	Cannondale Bar Tape, 3.5mm
Stem	HollowGram KNØT, Alloy w/ cable cover, -17°
Headset	Integrated, 1-1/8" - 1-1/4
Brakes	Shimano Ultegra Di2 Hydraulic Disc, 160/140mm MT800 Rotors
Brake Levers	Shimano Ultegra Di2
Saddle	Fizik New Aliante R5, 150mm width, S-alloy rails
Seatpost	HollowGram 60 KNØT Carbon, 330mm
Sizes	47, 51, 54, 56, 58, 60, 62
Color 1	Stealth Gray (SGY)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

SystemSix Hi-MOD Ultegra Di2

Color 1 - Team Replica



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C11352U

Frame	SystemSix Hi-MOD Carbon, integrated cable routing w/ Switchplate, SAVE, PF30a, flat mount disc, 12×142 Speed Release thru-axle
Fork	Hi-MOD Carbon, 1-1/8" - 1-1/4" steerer, 12×100mm Speed Release thru-axle, flat mount disc, 55mm offset (47-51cm) 45mm offset (54-62cm)
Rims	HollowGram 64 KNØT, Carbon, 20h front, 24h rear, 64mm deep, 21mm IW, tubeless ready
Hubs	(F) HollowGram KNØT, sealed bearing 12×100mm centerlock / (R) HollowGram KNØT, 12×142mm centerlock w/ DT Swiss 350 internals
Spokes	HollowGram, 2.0/1.8/2.0, straight-pull
Tires	Vittoria Rubino Pro Speed, 700 × 25c
Pedals	Not included
Crank	Shimano Ultegra
Bottom Bracket	Cannondale Alloy PressFit30
Chain	Shimano Ultegra

Rear Cogs	Shimano Ultegra Di2
Front Derailleur	Shimano Ultegra Di2
Rear Derailleur	Shimano Ultegra Di2
Shifters	Shimano Ultegra Di2
Handlebar	HollowGram KNØT SystemBar, Carbon, 8 deg. pitch adjust
Grips	Cannondale Bar Tape, 3.5mm
Stem	HollowGram KNØT, Alloy w/ cable cover, -17°
Headset	Integrated, 1-1/8" - 1-1/4
Brakes	Shimano Ultegra Di2 Hydraulic Disc, 160/140mm MT800 Rotors
Brake Levers	Shimano Ultegra Di2
Saddle	Fizik New Aliante R5, 150mm width, S-alloy rails
Seatpost	HollowGram 60 KNØT Carbon, 330mm
Sizes	47, 51, 54, 56, 58, 60, 62
Color 1	Team Replica (REP)

SystemSix Carbon Ultegra

Color 1 - Candy Red

Color 2 - Black Pearl





EMBARGO

Specifications

C11401M

Frame	SystemSix Carbon, integrated cable routing w/ Switchplate, SAVE, PF30a, flat mount disc, 12×142 Speed Release thru-axle
Fork	SystemSix Carbon, 1-1/8" - 1-1/4" steerer, 12×100mm Speed Release thru-axle, flat mount disc, 55mm offset (47-51cm) 45mm offset (54-62cm)
Rims	Vision SC55, carbon clincher disc, tubeless ready
Hubs	(F) Vision Sealed Cartridge hub 12×100mm / (R) Vision Sealed Cartridge hub, 12×142mm
Spokes	DP Spokes - 21F / 24R
Tires	Vittoria Rubino Pro Bright Black, 700 × 25c, reflective strip
Pedals	Not included
Crank	HollowGram, BB30a, OPI SpideRing, 52/36
Bottom Bracket	Cannondale Alloy PressFit30
Chain	Shimano HG601, 11-speed

Rear Cogs	Shimano 105, 11-30, 11-speed
Front Derailleur	Shimano Ultegra, braze-on
Rear Derailleur	Shimano Ultegra
Shifters	Shimano Ultegra, 11-speed
Handlebar	HollowGram KNØT SystemBar, Carbon, 8 deg. pitch adjust
Grips	Cannondale Bar Tape, 3.5mm
Stem	HollowGram KNØT, Alloy w/ cable cover, -17°
Headset	Integrated, 1-1/8" - 1-1/4
Brakes	Shimano Ultegra hydraulic disc, 160/140mm RT800 rotors
Brake Levers	Shimano Ultegra
Saddle	Prologo Dimension STN NDR, steel rails
Seatpost	HollowGram 60 KNØT Carbon, 330mm
Sizes	47, 51, 54, 56, 58, 60, 62
Color 1	Candy Red (CRD)
Color 2	Black Pearl (BPL)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

SuperSix EVO Hi-MOD Disc Dura-Ace Di2

Color 1 - Gun Metal Green w/ Black & Smoked Brushed Chrome



Specifications

C11101U

Frame	SuperSix EVO Hi-MOD Carbon, integrated cable routing w/ Switchplate, 12×142 Speed Release thru-axle, SAVE, PF30a, flat mount disc, integrated seat binder
Fork	SuperSix EVO Hi-MOD Carbon, SAVE, integrated crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing, 1-1/8" to 1-1/4" steerer and 55mm offset (44-54cm), 1-1/8" to 1-3/8" steerer and 45mm offset (56-62cm)
Rims	HollowGram 45 SL KNØT, Carbon, 20h front, 24h rear, 45mm deep, 21mm IW, tubeless ready
Hubs	(F) HollowGram KNØT, sealed bearing 12×100mm centerlock / (R) HollowGram KNØT, 12×142mm centerlock w/ DT Swiss 240 internals
Spokes	DT Swiss Aerolite, straight-pull
Tires	Vittoria Corsa, 700 × 25c
Pedals	Not included
Crank	Shimano Dura-Ace, 52/36
Bottom Bracket	Cannondale Alloy PressFit30

Chain	Shimano Dura-Ace Di2
Rear Cogs	Shimano Dura-Ace, 11-30
Front Derailleur	Shimano Dura-Ace Di2
Rear Derailleur	Shimano Dura-Ace Di2
Shifters	Shimano Dura-Ace Di2
Handlebar	HollowGram SAVE SystemBar, Carbon, 8 deg. pitch adjust
Grips	Cannondale Bar Tape, 3.5mm
Stem	HollowGram KNØT, Alloy w/ cable cover, -6°
Headset	Integrated, 1-1/8" - 1-1/4" (44-54cm), 1-1/8" - 1-3/8" (56-62cm)
Brakes	Shimano Dura-Ace, 160/140mm MT900 rotors
Brake Levers	Shimano Dura-Ace Di
Saddle	Fizik Tempo Argo R3, 150mm width, K:ium rails
Seatpost	HollowGram 27 SL KNØT, Carbon, 2 bolt clamp, 330mm, 0mm offset (44-48cm), 15mm offset (51-62cm)
Sizes	44, 48, 51, 54, 56, 58, 60, 62
Color 1	Gun Metal Green w/ Black & Smoked Brushed Chrome (GMG)

SuperSix EVO Hi-MOD Disc Ultegra Di2

Color 1 - Deep Teal



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C11201U

Frame	SuperSix EVO Hi-MOD Carbon, integrated cable routing w/ Switchplate, 12×142 Speed Release thru-axle, SAVE, PF30a, flat mount disc, integrated seat binder
Fork	SuperSix EVO Hi-MOD Carbon, SAVE, integrated crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing, 1-1/8" to 1-1/4" steerer and 55mm offset (44-54cm), 1-1/8" to 1-3/8" steerer and 45mm offset (56-62cm)
Rims	HollowGram 45 SL KNØT, Carbon, 20h front, 24h rear, 45mm deep, 21mm IW, tubeless ready
Hubs	(F) HollowGram KNØT, sealed bearing 12×100mm centerlock / (R) HollowGram KNØT, 12×142mm centerlock w/ DT Swiss 240 internals
Spokes	DT Swiss Aerolite, straight-pull
Tires	Vittoria Corsa, 700 × 25c
Pedals	Not included
Crank	Shimano Ultegra Di2, 52/36
Bottom Bracket	Cannondale Alloy PressFit30

Chain	Shimano Ultegra
Rear Cogs	Shimano Ultegra, 11-30
Front Derailleur	Shimano Ultegra Di2
Rear Derailleur	Shimano Ultegra Di2
Shifters	Shimano Ultegra Di2
Handlebar	HollowGram SAVE SystemBar, Carbon, 8 deg. pitch adjust
Grips	Cannondale Bar Tape, 3.5mm
Stem	HollowGram KNØT, Alloy w/ cable cover, -6°
Headset	Integrated, 1-1/8" - 1-1/4" (44-54cm), 1-1/8" - 1-3/8" (56-62cm)
Brakes	Shimano Ultegra Di2
Brake Levers	Shimano Ultegra Di2
Saddle	Fizik Tempo Argo R5, 150mm width, S-Alloy rails
Seatpost	HollowGram 27 SL KNØT, Carbon, 2 bolt clamp, 330mm, 0mm offset (44-48cm), 15mm offset (51-62cm)
Sizes	44, 48, 51, 54, 56, 58, 60, 62
Color 1	Deep Teal (DTE)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

SuperSix EVO Hi-MOD Disc Ultegra

Color 1 - Candy Red

Color 2 - Replica





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C11451M

Frame	SuperSix EVO Hi-MOD Carbon, integrated cable routing w/ Switchplate, 12×142 Speed Release thru-axle, SAVE, PF30a, flat mount disc, integrated seat binder
Fork	SuperSix EVO Hi-MOD Carbon, SAVE, integrated crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing, 1-1/8" to 1-1/4" steerer and 55mm offset (44-54cm), 1-1/8" to 1-3/8" steerer and 45mm offset (56-62cm)
Rims	HollowGram 35, Carbon, 24h front, 28h rear, 35mm deep, 19mm IW, tubeless ready
Hubs	(F) HollowGram, sealed bearing 12×100mm centerlock / (R) HollowGram 3-pawl, sealed bearing, 12×142mm centerlock
Spokes	HollowGram, 2.0/1.8/2.0, straight-pull
Tires	Vittoria Rubino Pro Bright Black, 700 × 25c, reflective strip
Pedals	Not included
Crank	HollowGram, BB30a, OPI SpideRing, 52/36
Bottom Bracket	Cannondale Alloy PressFit30
Chain	Shimano HG601, 11-speed
Rear Cogs	Shimano 105, 11-30, 11-speed
Front Derailleur	Shimano Ultegra, braze-on
Rear Derailleur	Shimano Ultegra
Shifters	Shimano Ultegra, 11-speed
Handlebar	HollowGram SAVE SystemBar, Carbon, 8 deg. pitch adjust
Grips	Cannondale Bar Tape, 3.5mm
Stem	HollowGram KNØT, Alloy w/ cable cover, -6°
Headset	Integrated, 1-1/8" - 1-1/4" (44-54cm), 1-1/8" - 1-3/8" (56-62cm)
Brakes	Shimano Ultegra hydraulic disc, 160/160mm RT800 rotors
Brake Levers	Shimano Ultegra
Saddle	Fizik Aliante Delta, S-alloy rails
Seatpost	HollowGram 27 SL KNØT, Carbon, 2 bolt clamp, 330mm, 0mm offset (44-48cm), 15mm offset (51-62cm)
Sizes	44, 48, 51, 54, 56, 58, 60, 62
Color 1	Candy Red (CRD)
Color 2	Replica (RP)

SuperSix EVO Carbon Disc Ultegra Di2

Color 1 - Mercury Silver w/ Rally Red

Color 2 - Black Pearl w/ Gray & Highlighter Yellow





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C11331U

Frame	SuperSix Evo Carbon, integrated cable routing w/ Switchplate, 12×142 Speed Release thru-axle, SAVE, PF30a, flat mount disc, integrated seat binder
Fork	SuperSix Evo Carbon, SAVE, integrated crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing, 1-1/8" to 1-1/4" steerer and 55mm offset (44-54cm), 1-1/8" to 1-3/8" steerer and 45mm offset (56-62cm)
Rims	HollowGram 45 KNØT, Carbon, 20h front, 24h rear, 45mm deep, 21mm IW, tubeless ready
Hubs	(F) HollowGram KNØT, sealed bearing 12×100mm centerlock / (R) HollowGram KNØT, 12×142mm centerlock w/ DT Swiss 350 internals
Spokes	HollowGram, 2.0/1.8/2.0, straight-pull
Tires	Vittoria Rubino Pro Bright Black, 700 × 25c, reflective strip
Pedals	Not included
Crank	Shimano Ultegra R8100, 50/34 for 12-speed
Bottom Bracket	Cannondale Alloy PressFit30
Chain	Shimano CN-M8100, 12-speed
Rear Cogs	Shimano Ultegra R8100, 11-30, 12-speed
Front Derailleur	Shimano Ultegra Di2 R8150, braze-on
Rear Derailleur	Shimano Ultegra Di2 R8150
Shifters	Shimano Ultegra Di2 R8170, 12-speed
Handlebar	HollowGram SAVE SystemBar, Carbon, 8 deg. pitch adjust
Grips	Cannondale Bar Tape, 3.5mm
Stem	HollowGram KNØT, Alloy w/ cable cover, -6°
Headset	Integrated, 1-1/8" - 1-1/4" (44-54cm), 1-1/8" - 1-3/8" (56-62cm)
Brakes	Shimano Ultegra Di2 R8170 hydraulic disc, 160/160mm MT800 rotors
Brake Levers	Shimano Ultegra Di2 R8170
Saddle	Fizik Tempo Argo R5, 150mm width, S-Alloy rails
Seatpost	HollowGram 27 SL KNØT, Carbon, 2 bolt clamp, 330mm, 0mm offset (44-48cm), 15mm offset (51-62cm)
Sizes	44, 48, 51, 54, 56, 58, 60, 62
Color 1	Mercury Silver w/ Rally Red (MRC)
Color 2	Black Pearl w/ Gray & Highlighter Yellow (BLK)

SuperSix EVO Carbon Disc Ultegra

Color 1 - Matte Black





Specifications

C11671M

Frame	SuperSix EVO Carbon, integrated cable routing w/ Switchplate, 12×142 Speed Release thru-axle, SAVE, PF30a, flat mount disc, integrated seat binder
Fork	SuperSix EVO Carbon, SAVE, integrated crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing, 1-1/8" to 1-1/4" steerer and 55mm offset (44-54cm), 1/8" to 1-3/8" steerer and 45mm offset (56-62cm)
Rims	HollowGram 35, Carbon, 24h front, 28h rear, 35mm deep, 19mm IW, tubeless ready
Hubs	(F) HollowGram, sealed bearing 12×100mm centerlock / (R) HollowGram 3-pawl, sealed bearing, 12×142mm centerlock
Spokes	HollowGram, 2.0/1.8/2.0, straight-pull
Tires	Vittoria Rubino Pro Bright Black, 700 × 25c, reflective strip
Pedals	Not included
Crank	Cannondale 1, BB30a, 50/34
Bottom Bracket	Cannondale Alloy PressFit30
Chain	Shimano HG601, 11-speed
Rear Cogs	Shimano 105, 11-32, 11-speed
Front Derailleur	Shimano Ultegra, braze-on
Rear Derailleur	Shimano Ultegra
Shifters	Shimano Ultegra, 11-speed
Handlebar	HollowGram SAVE SystemBar, Carbon, 8 deg. pitch adjust
Grips	Cannondale Bar Tape, 3.5mm
Stem	HollowGram KNØT, Alloy w/ cable cover, -6°
Headset	Integrated, 1-1/8" - 1-1/4" (44-54cm), 1-1/8" - 1-3/8" (56-62cm)
Brakes	Shimano Ultegra hydraulic disc, 160/160mm RT800 rotors
Brake Levers	Shimano Ultegra
Saddle	Fizik Aliante Delta, S-alloy rails
Seatpost	HollowGram 27 SL KNØT, Carbon, 2 bolt clamp, 330mm
Sizes	44, 48, 51, 54, 56, 58, 60, 62
Color 1	Matte Black (BBQ)
Color 2	Cashmere (CAS)

SuperSix EVO Carbon Disc 105

Color 1 - Bio Lime

Color 2 - Black Pearl





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C11771M

Frame	SuperSix EVO Carbon, integrated cable routing w/ Switchplate, 12×142 Speed Release thru-axle, SAVE, PF30a, flat mount disc, integrated seat binder
Fork	SuperSix EVO Carbon, SAVE, integrated crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing, 1-1/8" to 1-1/4" steerer and 55mm offset (44-54cm), 1/8" to 1-3/8" steerer and 45mm offset (56-62cm)
Rims	Cannondale Disc, double wall w/eyelet, 28h
Hubs	(F) Formula CL-712, 12×100mm centerlock / (R) Formula RXC-400, 12×142mm centerlock
Spokes	Stainless Steel, 14g
Tires	Vittoria Zaffiro Pro Slick, 700 × 25c
Pedals	Not included
Crank	Cannondale 1, BB30a, 50/34
Bottom Bracket	Cannondale Alloy PressFit30
Chain	Shimano HG601, 11-speed
Rear Cogs	Shimano 105, 11-30, 11-speed
Front Derailleur	Shimano 105, braze-on
Rear Derailleur	Shimano 105 GS
Shifters	Shimano 105, 11-speed
Handlebar	Cannondale 3, 6061 alloy, Compact
Grips	Cannondale Bar Tape, 3.5mm
Stem	Cannondale 3, 6061 Alloy, 31.8, 7°
Headset	Integrated, 1-1/8" - 1-1/4" (44-54cm), 1-1/8" - 1-3/8" (56-62cm)
Brakes	Shimano 105 hydraulic disc, 160/160mm RT64 rotors
Brake Levers	Shimano 105
Saddle	Fizik Aliante Delta, S-alloy rails
Seatpost	HollowGram 27 KNØT, Alloy, 2 bolt clamp, 330mm, 15mm offset
Sizes	44, 48, 51, 54, 56, 58, 60, 62
Color 1	Bio Lime (BIO)
Color 2	Black Pearl (BPL)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

SuperSix EVO CX

Color 1 - Purple Haze

Color 2 - Gold Dust





Specifications

C17201U

Frame	SuperSix EVO CX Carbon, internal cable routing w/ Switchplate, 12×142mm Speed Release thru-axle, SAVE, PF30-83 Ai, flat mount disc, integrated seatpost binder
Fork	SuperSix EVO CX Carbon, SAVE, integrated crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing, 1-1/8" to 1-1/2", 55mm offset
Rims	DT Swiss R470 db, 28h
Hubs	(F) Formula CL-712, 12×100mm centerlock / (R) Formula RXC-400, 12×142mm centerlock
Spokes	Stainless Steel, 14g
Tires	Vittoria Terreno Mix TNT, 700 x 33c, tubeless ready
Pedals	Not included
Crank	Cannondale 1, BB86a, OPI SpideRing, 40T
Bottom Bracket	Cannondale Alloy PressFit30
Chain	SRAM CN-1130

Rear Cogs	SRAM PG-1170, 11-36, 11-speed
Front Derailleur	N/A (Braze-on compatible)
Rear Derailleur	SRAM Force 1, Long cage
Shifters	SRAM Force 1, 11-speed
Handlebar	Cannondale 2, 6061 Alloy, Compact
Grips	Cannondale Bar Tape, 3.5mm
Stem	Cannondale 3, 6061 Alloy, 31.8, 7°
Headset	Integrated, 1-1/8" - 1-1/2"
Brakes	SRAM Force 1 hydraulic Disc, 160/140mm CenterLine rotors
Brake Levers	SRAM Force 1
Saddle	Fizik Aliante Delta, S-alloy rails
Seatpost	HollowGram 27 SL KNØT, Carbon, 2 bolt clamp, 330mm, 0mm offset all sizes
Sizes	46, 51, 54, 56, 58
Color 1	Purple Haze (PRH)
Color 2	Gold Dust (GDT)

SuperSix EVO SE

Color 1 - Meteor Gray

Color 2 - Cool Mint (CMT)





Specifications

C17102U

Frame	SuperSix EVO CX Carbon, internal cable routing w/ Switchplate, 12×142mm Speed Release thru-axle, SAVE, PF30-83 Ai, flat mount disc, integrated seatpost binder
Fork	SuperSix EVO CX Carbon, SAVE, integrated crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing, 1-1/8" to 1-1/2", 55mm offset
Rims	DT Swiss CR-1600 SPLINE, 25h, tubeless ready
Hubs	(F) DT Swiss 350, straightpull, 12×100mm centerlock / (R) DT Swiss 350 with Ratchet System 18, straightpull, 12×142mm Ai centerlock
Spokes	DT Swiss Aero Comp straight-pull (Ai Offset Dish - Rear)
Tires	Vittoria Terreno Dry TNT, 700 x 40c, tubeless ready
Pedals	Not included
Crank	SRAM Rival DUB X-Range, 46/33
Bottom Bracket	SRAM DUB PF30A Road 83mm, Cannondale Ai
Chain	SRAM Rival 12-speed

Rear Cogs	SRAM Rival XG-1250, 12-speed 10-36
Front Derailleur	SRAM Rival eTap AXS, braze-on
Rear Derailleur	SRAM Rival eTap AXS
Shifters	SRAM Rival eTap AXS HRD
Handlebar	Cannondale 2, 6061 Alloy, Compact
Grips	Cannondale Bar Tape, 3.5mm
Stem	Cannondale 2, 6061 Alloy, 31.8, 7°
Headset	Integrated, 1-1/8" - 1-1/2"
Brakes	SRAM Rival hydraulic disc, 160/160mm Paceline rotors
Brake Levers	SRAM Rival eTap AXS HRD
Saddle	Prologo Dimension AGX, Tirox
Seatpost	HollowGram 27 SL KNØT, Carbon, 2 bolt clamp, 330mm, 0mm offset (46cm), 15mm offset (51-58cm)
Sizes	46, 51, 54, 56, 58
Color 1	Meteor Gray (MTG)
Color 2	Cool Mint (CMT)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

SuperSix EVO SE 1

Color 1 - Jade Green



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C17152U

Frame	SuperSix EVO CX Carbon, internal cable routing w/ Switchplate, 12×142mm Speed Release thru-axle, PF30-83 Ai, flat mount disc, integrated seatpost binder
Fork	SuperSix EVO CX Carbon, integrated crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing, 1-1/8" to 1-1/2", 55mm offset
Rims	DT Swiss GR-1600 SPLINE db 25, tubeless ready
Hubs	(F) DT Swiss 350, straightpull, 12×100mm centerlock / (R) DT Swiss 350 with Ratchet System 18, straightpull, 12×142mm Ai centerlock
Spokes	DT Swiss Aero Comp straight-pull (Ai Offset Dish - Rear)
Tires	Vittoria Terreno Dry TNT, 700 x 40c, tubeless ready
Pedals	Not included
Crank	HollowGram, PF83a w/ SpideRing, 46/30T
Bottom Bracket	Cannondale Alloy PressFit30
Chain	Shimano HG701, 11-speed
Rear Cogs	Shimano Ultegra HG800, 11-34, 11-speed
Front Derailleur	Shimano GRX 810, braze-on
Rear Derailleur	Shimano GRX 810, Shadow RD+
Shifters	Shimano GRX 800, 11-speed
Handlebar	Cannondale 2, 6061 Alloy, Compact
Grips	Cannondale Bar Tape, 3.5mm
Stem	Cannondale 2, 6061 Alloy, 31.8, 7°
Headset	Integrated, 1-1/8" - 1-1/2"
Brakes	Shimano GRX 800 hydraulic disc, 160/160mm MT800 rotors
Brake Levers	Shimano GRX 800 hydraulic disc
Saddle	Prologo Dimension AGX, Tirox
Seatpost	HollowGram 27 SL KNØT, Carbon, 2 bolt clamp, 330mm, 0mm offset (46cm), 15mm offset (51-58cm)
Sizes	46, 51, 54, 56, 58
Color 1	Jade Green (JDE)

SuperSix EVO SE 2

Color 1 - Olive Green



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C17272U

Frame	SuperSix EVO CX Carbon, internal cable routing w/ Switchplate, 12×142mm Speed Release thru-axle, PF30-83 Ai, flat mount disc, integrated seatpost binder
Fork	SuperSix EVO CX Carbon, integrated crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing, 1-1/8" to 1-1/2", 55mm offset
Rims	DT Swiss G540 db, 28h, tubeless ready
Hubs	(F) Formula CL-712, 12×100mm centerlock / (R) Formula RXC-400, 12×142mm centerlock
Spokes	Stainless Steel, 14g
Tires	Vittoria Terreno Dry TNT, 700 x 40c, tubeless ready
Pedals	Not included
Crank	Cannondale 1, PF83a w/ SpideRing, 46/30T
Bottom Bracket	Cannondale Alloy PressFit30
Chain	Shimano HG601, 11-speed
Rear Cogs	Shimano 105, 11-34, 11-speed
Front Derailleur	Shimano GRX 810, braze-on
Rear Derailleur	Shimano GRX 810, Shadow RD+
Shifters	Shimano GRX 600, 11-speed
Handlebar	Cannondale 2, 6061 Alloy, Compact
Grips	Cannondale Bar Tape, 3.5mm
Stem	Cannondale 2, 6061 Alloy, 31.8, 7°
Headset	Integrated, 1-1/8" - 1-1/2"
Brakes	Shimano GRX 600 hydraulic disc, 160/160mm RT70 rotors
Brake Levers	Shimano GRX 600 hydraulic disc
Saddle	Prologo Dimension AGX, STN
Seatpost	HollowGram 27 SL KNØT, Carbon, 2 bolt clamp, 330mm, 0mm offset (46cm), 15mm offset (51-58cm)
Sizes	46, 51, 54, 56, 58
Color 1	Olive Green (OGN)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

SuperSix EVO Hi-Mod Carbon Frame



C11181U

Frame	Hi-MOD Carbon, integrated cable routing w/ Switchplate, 12×142 Speed Release thru-axle, SAVE, PF30a, flat mount disc, integrated seat binder
Fork	BallisTec Hi-MOD Carbon, SAVE, integrated crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing, 1-1/8" to 1-1/4" steerer and 55mm offset (44-54cm), 1/8" to 1-3/8" steerer and 45mm offset (56-62cm)

Headset	Integrated, 1-1/8" - 1-1/4" (44-54cm), 1-1/8" - 1-3/8" (56-62cm)
Seatpost	HollowGram 27 SL KNØT, Carbon, 2 bolt clamp, 330mm, 0mm offset (44-48cm), 15mm offset (51-62cm)
Sizes	44, 48, 51, 54, 56, 58, 60, 62
Color 1	Team Replica (REP)
Color 2	Matte Black (BBQ)
Color 3	Rainbow Trout (RBT)
Color 4	Mantis (MAT)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

CAAD13 Disc Ultegra

Color 1 - Matte Black



Specifications

C13171M

Frame	SmartForm C1 Premium Alloy, 12×142 Speed Release thru-axle, flat-mount disc, integrated cable routing w/ Switchplate, SAVE, BB30a, Di2 ready
Fork	BallisTec Carbon, SAVE, 1-1/8" to 1-1/4" steerer, integrated crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing, 55mm offset (47-54cm) 45mm offset (56-62cm)
Rims	Fulcrum Racing 600 DB
Hubs	(F) Fulcrum Racing 900, 12×100mm centerlock / (R) Fulcrum Racing 900, 12×142mm centerlock
Spokes	Stainless steel, 14g
Tires	Vittoria Rubino Pro Bright Black, 700 × 28c
Pedals	Not Included
Crank	Cannondale 1, BB30a, FSA rings, 50/34
Bottom Bracket	Cannondale BB30
Chain	Shimano HG601, 11-speed
Rear Cogs	Shimano 105, 11-30, 11-speed
Front Derailleur	Shimano Ultegra, braze-on
Rear Derailleur	Shimano Ultegra GS
Shifters	Shimano Ultegra hydraulic disc, 11-speed
Handlebar	Cannondale C2, 7050 alloy, Compact
Grips	Cannondale Bar Tape, 3.5mm
Stem	Cannondale C2, 6061 Alloy, 31.8, 7°
Headset	CAAD13, integrated, 1-1/8" - 1-1/4
Brakes	Shimano Ultegra hydraulic disc, 160/160mm RT30 rotors
Brake Levers	Shimano Ultegra hydraulic disc
Saddle	Fizik Aliante Delta, S-alloy rails
Seatpost	HollowGram 27 KNØT, Alloy, 2 bolt clamp, 330mm, 15mm offset
Sizes	44, 48, 51, 54, 56, 58, 60, 62
Color 1	Matte Black (BBQ)

CAAD13 Disc 105

Color 1 Barbecue (BBQ)

Color 2 Candy Red (CRD)

Color 3 Space Black (SBK)

Color 3 Space Black (SBK)



Specifications

C13321U

Frame	SmartForm C1 Premium Alloy, 12×142 Speed Release thru-axle, flat-mount disc, integrated cable routing w/ Switchplate, SAVE, BB30a, Di2 ready
Fork	CAAD13 Full Carbon, SAVE, 1-1/8" to 1-1/4" steerer, integrated crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing, 55mm offset (47-54cm) 45mm offset (56-62cm)
Rims	DT Swiss R470 db, 28h
Hubs	(F) Formula CL-712, 12×100mm centerlock / (R) Formula RXC-400, 12×142mm centerlock
Spokes	Stainless Steel, 14g
Tires	Vittoria Rubino Pro Bright Black, 700 × 25c
Pedals	Not included
Crank	Shimano RS510, 52/36
Bottom Bracket	Cannondale BB30 w/ 24mm adapter
Chain	Shimano HG601, 11-speed
Rear Cogs	Shimano 105, 11-30, 11-speed
Front Derailleur	Shimano 105, braze-on
Rear Derailleur	Shimano 105 GS
Shifters	Shimano 105 hydraulic disc, 11-speed
Handlebar	Cannondale 3, 6061 Alloy, Compact
Grips	Cannondale Bar Tape, 3.5mm
Stem	Cannondale 3, 6061 Alloy, 31.8, 7°
Headset	CAAD13, integrated, 1-1/8" - 1-1/4
Brakes	Shimano 105 hydraulic disc, 160/160mm RT54 rotors
Brake Levers	Shimano 105 hydraulic disc
Saddle	Fizik Aliante Delta, S-alloy rails
Seatpost	HollowGram 27 KNØT, Alloy, 2 bolt clamp, 330mm
Sizes	44, 48, 51, 54, 56, 58, 60, 62
Color 1	Barbecue (BBQ)
Color 2	Candy Red (CRD)
Color 3	Space Black (SBK)
Extras	Removable fender bridge

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

CAAD13 Disc Tiagra

Color 1 - Purple Haze



Specifications

C13421U

Frame	SmartForm C1 Premium Alloy, 12×142 Speed Release thru-axle, flat-mount disc, integrated cable routing w/ Switchplate, SAVE, BB30a, Di2 ready
Fork	CAAD13 Full Carbon, SAVE, 1-1/8" to 1-1/4" steerer, integrated crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing, 55mm offset (47-54cm) 45mm offset (56-62cm)
Rims	RD 2.0, 28h
Hubs	(F) Formula CL-712, 12×100mm centerlock / (R) Formula RXC-400, 12×142mm centerlock
Spokes	Stainless Steel, 14g
Tires	Vittoria Zaffiro Pro Slick, 700 × 25c
Pedals	Not included
Crank	Shimano Tiagra, 52/36
Bottom Bracket	Cannondale BB30 w/ 24mm adapter
Chain	KMC X10, 10-speed
Rear Cogs	Shimano Tiagra, 11-34, 10-speed
Front Derailleur	Shimano Tiagra, braze-on
Rear Derailleur	Shimano Tiagra GS
Shifters	Shimano Tiagra hydraulic disc, 10-speed
Handlebar	Cannondale 4, 6061 Alloy, Compact
Grips	Cannondale Bar Tape, 3.5mm
Stem	Cannondale 4, 6061 Alloy, 31.8, 7°
Headset	CAAD13, integrated, 1-1/8" - 1-1/4
Brakes	Shimano Tiagra hydraulic disc, 160/160mm RT54 rotors
Brake Levers	Shimano Tiagra hydraulic disc
Saddle	Prologo Nago RS STN
Seatpost	HollowGram 27 KNØT, Alloy, 2 bolt clamp, 330mm
Sizes	44, 48, 51, 54, 56, 58, 60, 62
Color 1	Purple Haze (PRH)
Extras	Removable fender bridge

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

CAAD Optimo 1

Color 1 - Candy Red

Color 2 - Alpine





Specifications

C14101M

Frame	SmartForm C2 Alloy, SAVE, tapered headtube, fender mounts, 130×10mm QR
Fork	CAAD Optimo Full Carbon, 1-1/8" to 1-1/4" steerer, fender mounts, 100×9mm QR
Rims	RS 2.0, 24h front, 28h rear
Hubs	(F) Formula RB-56 / (R) Formula RB-5711
Spokes	Stainless Steel, 14g
Tires	Vittoria Zaffiro Pro Slick, 700 × 25c
Pedals	Wellgo w/ Clip and Strap
Crank	FSA Gossamer Alloy, 50/34
Bottom Bracket	FSA MegaExo
Chain	KMC X11, 11-speed
Rear Cogs	Shimano 105, 11-30, 11-speed
Front Derailleur	Shimano 105, 31.8 clamp

Rear Derailleur	Shimano 105 GS
Shifters	Shimano 105, 11-speed
Handlebar	Cannondale 3, 6061 Alloy, Compact
Grips	Cannondale Bar Tape, 3.5mm
Stem	Cannondale 3, 6061 Alloy, 31.8, 7°
Headset	CAAD Optimo, 1-1/8" to 1-1/4", 25mm top cap
Brakes	Tektro R741, dual pivot calipers
Brake Levers	Shimano 105
Saddle	Cannondale Stage CX
Seatpost	Cannondale 3, 6061 Alloy, 27.2 × 350mm
Sizes	44, 48, 51, 54, 56, 58
Color 1	Candy Red (CRD)
Color 2	Alpine (ALP)

CAAD Optimo 2

Color 1 - Black Pearl



Specifications

C14201M

Frame	SmartForm C2 Alloy, SAVE, tapered headtube, fender mounts, 130×10mm QR
Fork	CAAD Optimo Full Carbon, 1-1/8" to 1-1/4" steerer, fender mounts, 100×9mm QR
Rims	RS 3.0, 24h front, 28h rear
Hubs	(F) Formula RB-31 / (R) Formula RB-32
Spokes	Stainless Steel, 14g
Tires	Vittoria Zaffiro, 700 × 25c
Pedals	Wellgo w/ Clip and Strap
Crank	FSA Omega ME Alloy, 50/34
Bottom Bracket	FSA Cartridge
Chain	KMC X10EL, 10-speed
Rear Cogs	Shimano HG500, 11-32, 10-speed
Front Derailleur	Shimano Tiagra, 31.8 clamp

Rear Derailleur	Shimano Tiagra GS
Shifters	Shimano Tiagra, 10-speed
Handlebar	6061 Alloy, Compact
Grips	Cannondale Bar Tape, 3.5mm
Stem	6061 Alloy, 31.8, 7°
Headset	CAAD Optimo, 1-1/8" to 1-1/4", 25mm top cap
Brakes	Promax RC-476, dual pivot calipers
Brake Levers	Shimano Tiagra
Saddle	Cannondale Stage CX
Seatpost	Cannondale 4, 6061 Alloy, 27.2 × 350mm
Sizes	44, 48, 51, 54, 56, 58
Color 1	Black Pearl (BPL)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

CAAD Optimo 3

Color 1 - Black



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C14301M

Frame	SmartForm C2 Alloy, SAVE, tapered headtube, fender mounts, 130×10mm QR
Fork	CAAD Optimo Full Carbon, 1-1/8" to 1-1/4" steerer, fender mounts, 100×9mm QR
Rims	RS 3.0, 24h front, 28h rear
Hubs	(F) Formula RB-31 / (R) Formula RB-32
Spokes	Stainless Steel, 14g
Tires	Vittoria Zaffiro, 700 × 25c
Pedals	Wellgo w/ Clip and Strap
Crank	FSA Vero Alloy, 50/34
Bottom Bracket	Cartridge, square taper
Chain	KMC X9, 9-speed
Rear Cogs	Shimano HG50, 11-30, 9-speed
Front Derailleur	Shimano Sora, 31.8 clamp
Rear Derailleur	Shimano Sora GS
Shifters	Shimano Sora, 9-speed
Handlebar	6061 Alloy, Compact
Grips	Cannondale Bar Tape, 3.5mm
Stem	6061 Alloy, 31.8, 7°
Headset	CAAD Optimo, 1-1/8" to 1-1/4", 25mm top cap
Brakes	Promax RC-452, dual pivot calipers
Brake Levers	Shimano Sora
Saddle	Cannondale Stage CX
Seatpost	Cannondale 4, 6061 Alloy, 27.2 × 350mm
Sizes	44, 48, 51, 54, 56, 58
Color 1	Black (BLK)

CAAD Optimo 4

Color 1 - Silver



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C14401M

Frame	SmartForm C2 Alloy, SAVE, tapered headtube, fender mounts, 130×10mm QR
Fork	CAAD Optimo Full Carbon, 1-1/8" to 1-1/4" steerer, fender mounts, 100×9mm QR
Rims	RS 3.0, 24h front, 28h rear
Hubs	(F) Formula RB-31 / (R) Formula RB-32
Spokes	Stainless Steel, 14g
Tires	Vittoria Zaffiro, 700 × 25c
Pedals	Wellgo w/ Clip and Strap
Crank	FSA Tempo, 50/34
Bottom Bracket	Cartridge, square taper
Chain	Shimano HG71, 8-speed
Rear Cogs	Shimano HG50, 11-30, 8-speed
Front Derailleur	Shimano Claris, 31.8 clamp
Rear Derailleur	Shimano Claris
Shifters	Shimano Claris, 8-speed
Handlebar	6061 Alloy, Compact
Grips	Cannondale Bar Tape, 3.5mm
Stem	6061 Alloy, 31.8, 7°
Headset	CAAD Optimo, 1-1/8" to 1-1/4", 25mm top cap
Brakes	Promax RC-452, dual pivot calipers
Brake Levers	Shimano Claris
Saddle	Cannondale Stage CX
Seatpost	Cannondale 4, 6061 Alloy, 27.2 × 350mm
Sizes	44, 48, 51, 54, 56, 58
Color 1	Silver (SLV)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Synapse Carbon 1 RLE

Color 1 - Stealth Gray w/ Mercury



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C12102U

Frame	Synapse Carbon, SmartSense enabled, Proportional Response size-specific design, BSA threaded BB, flat mount brake, 12×142mm thru axle, thru-tube internal cable routing with Switch Plate, removable fender bridge, hidden rack/fender mounts
Fork	Synapse Carbon, integrated crown race, Proportional Response size-specific design, 12×100mm thru-axle, thru-tube internal routing, hidden fender mounts
Rims	HollowGram 45 SL KNØT, Carbon, 20h front, 24h rear, 45mm deep, 21mm IW, tubeless ready
Hubs	(F) HollowGram KNØT, sealed bearing 12×100mm centerlock / (R) HollowGram KNØT, 12×142mm centerlock w/ DT Swiss 240 internals
Spokes	DT Swiss Aerolite, straight-pull
Tires	Vittoria Corsa tan wall, 700 × 30c
Pedals	Not included
Crank	Shimano Dura-Ace, BSA, 50/34
Bottom Bracket	Shimano R9100 BSA
Chain	Shimano Dura-Ace
Rear Cogs	Shimano Dura-Ace
Front Derailleur	Shimano Dura-Ace Di2, braze-on
Rear Derailleur	Shimano Dura-Ace Di2
Shifters	Shimano Dura-Ace Di2 hydraulic disc
Handlebar	HollowGram SAVE SystemBar, Carbon, 8 deg. pitch adjust
Grips	Fabric Knurl Bar Tape
Stem	HollowGram SAVE, Alloy, -6°
Headset	Synapse Carbon Sealed Bearing, integrated, 1-1/4"-1-1/8"
Brakes	Shimano Dura-Ace Di2 hydraulic disc, 160/160mm RT900 rotors
Brake Levers	Shimano Dura-Ace Di2 hydraulic
Saddle	Fizik Tempo Argo R3, 150mm width, K:ium rails
Seatpost	HollowGram SAVE Carbon SmartSense, 27.2 × 350mm (48-56), 400mm (58-61)
Sizes	48, 51, 54, 56, 58, 65
Color 1	Stealth Gray w/ Mercury (SGY)
Extras	SmartSense with Lights and Radar, Trainer-compatible thru-axle

Synapse Carbon LTD RLE

Color 1 - Gunmetal Green



Specifications

C12151U

Frame	Synapse Carbon, SmartSense enabled, Proportional Response size-specific design, BSA threaded BB, flat mount brake, 12×142mm thru axle, thru-tube internal cable routing with Switch Plate, removable fender bridge, hidden rack/fender mounts
Fork	Synapse Carbon, integrated crown race, Proportional Response size-specific design, 12×100mm thru-axle, thru-tube internal routing, hidden fender mounts
Rims	HollowGram 45 KNØT, Carbon, 20h front, 24h rear, 45mm deep, 21mm IW, tubeless ready
Hubs	(F) HollowGram KNØT, sealed bearing 12×100mm centerlock / (R) HollowGram KNØT, 12×142mm centerlock w/ DT Swiss 240 internals
Spokes	Formula Grand Forza, straight-pull
Tires	WTB Exposure TCS, 700 × 30c, Distance compound, tubeless ready
Pedals	Not included
Crank	Shimano GRX 810, BSA, 48/31
Bottom Bracket	Shimano R60 BSA
Chain	Shimano HG701, 11-speed
Rear Cogs	Shimano Ultegra HG800, 11-34, 11-speed
Front Derailleur	Shimano GRX 815, Di2, braze-on
Rear Derailleur	Shimano GRX 815, Di2, Shadow RD+
Shifters	Shimano GRX 800 hydraulic disc, 11-speed
Handlebar	HollowGram SAVE SystemBar, Carbon, 8 deg. pitch adjust
Grips	Fabric Knurl Bar Tape
Stem	HollowGram SAVE, Alloy, -6°
Headset	Synapse Sealed Bearing, integrated, 1-1/4"-1-1/8"
Brakes	Shimano GRX 800 hydraulic disc, 160/160mm RT800 rotors
Brake Levers	Shimano GRX 800 hydraulic disc
Saddle	Fizik Tempo Argo R5, 150mm width, S-alloy rails
Seatpost	HollowGram SAVE Carbon SmartSense, 27.2 × 350mm (48-56), 400mm (58-61)
Sizes	48, 51, 54, 56, 58, 63
Color 1	Gunmetal Green (GMG)
Extras	SmartSense with Lights and Radar, Trainer-compatible thru-axle

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Synapse Carbon 2 RLE

Color 1 - Cool Mint

Color 2 - Charcoal Gray





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C12202U

Frame	Synapse Carbon, SmartSense enabled, Proportional Response size-specific design, BSA threaded BB, flat mount brake, 12×142mm thru axle, thru-tube internal cable routing with Switch Plate, removable fender bridge, hidden rack/fender mounts
Fork	Synapse Carbon, integrated crown race, Proportional Response size-specific design, 12×100mm thru-axle, thru-tube internal routing, hidden fender mounts
Rims	Fulcrum Rapid Red 500
Hubs	(F) Fulcrum Rapid Red 500, 12×100mm centerlock / (R) Fulcrum Rapid Red 500, 12×142mm centerlock
Spokes	Fulcrum, Stainless steel
Tires	Vittoria Rubino Pro Bright Black, 700 × 30c, reflective
Pedals	Not included
Crank	Shimano Ultegra, BSA, 50/34
Bottom Bracket	Shimano R60 BSA
Chain	Shimano Ultegra
Rear Cogs	Shimano Ultegra
Front Derailleur	Shimano Ultegra Di2, braze-on
Rear Derailleur	Shimano Ultegra Di2
Shifters	Shimano Ultegra Di2 hydraulic disc
Handlebar	FSA Gossamer Compact
Grips	Fabric Knurl Bar Tape
Stem	Cannondale 2, 6061 Alloy, 31.8, 7°
Headset	Synapse Sealed Bearing, integrated, 1-1/4"-1-1/8"
Brakes	Shimano Ultegra Di2 hydraulic disc, 160/160mm RT800 rotors
Brake Levers	Shimano Ultegra Di2 hydraulic
Saddle	Fizik Tempo Argo R5, 150mm width, S-alloy rails
Seatpost	Cannondale 2 SmartSense, UD Carbon, 27.2 x 350mm (48-56), 400mm (58-61)
Sizes	48, 51, 54, 56, 58, 66
Color 1	Cool Mint (CMT)
Color 2	Charcoal Gray (GRY)
Extras	SmartSense with Lights and Radar, Trainer-compatible thru-axle

Synapse Carbon 2 RL

Color 1 - Black Pearl

Color 2 - Beetle Green





Specifications

C12251U

Frame	Synapse Carbon, SmartSense enabled, Proportional Response size-specific design, BSA threaded BB, flat mount brake, 12×142mm thru axle, thru-tube internal cable routing with Switch Plate, removable fender bridge, hidden rack/fender mounts
Fork	Synapse Carbon, integrated crown race, Proportional Response size-specific design, 12×100mm thru-axle, thru-tube internal routing, hidden fender mounts
Rims	Fulcrum Rapid Red 900
Hubs	(F) Fulcrum Rapid Red 900, 12×100mm centerlock / (R) Fulcrum Rapid Red 900, 12×142mm centerlock
Spokes	Fulcrum, Stainless steel
Tires	Vittoria Rubino Pro Bright Black, 700 × 30c, reflective
Pedals	Not included
Crank	Shimano Ultegra, BSA, 50/34
Bottom Bracket	Shimano R60 BSA
Chain	Shimano HG701, 11-speed
Rear Cogs	Shimano Ultegra HG800, 11-34, 11-speed
Front Derailleur	Shimano Ultegra, braze-on
Rear Derailleur	Shimano Ultegra GS
Shifters	Shimano Ultegra hydraulic disc, 11-speed
Handlebar	Cannondale 2, 7050 alloy, Compact
Grips	Fabric Knurl Bar Tape
Stem	Cannondale 2, 6061 Alloy, 31.8, 7°
Headset	Synapse Sealed Bearing, integrated, 1-1/4"-1-1/8"
Brakes	Shimano Ultegra hydraulic disc, 160/160mm RT800 rotors
Brake Levers	Shimano Ultegra hydraulic
Saddle	Fizik Aliante Delta, S-alloy rails
Seatpost	Cannondale 3 SmartSense, 6061 Alloy, 27.2 × 350mm (48-56), 400mm (58-61)
Sizes	48, 51, 54, 56, 58, 64
Color 1	Black Pearl (BPL)
Color 2	Beetle Green (BGN)
Extras	SmartSense with Lights and Radar, Trainer-compatible thru-axle

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Synapse Carbon 2 LE

Color 1 - Smoke Black

Color 2 - Laguna Yellow

Color 3 - Jade



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C12252U

Frame	Synapse Carbon, SmartSense enabled, Proportional Response size-specific design, BSA threaded BB, flat mount brake, 12×142mm thru axle, thru-tube internal cable routing with Switch Plate, removable fender bridge, hidden rack/fender mounts
Fork	Synapse Carbon, integrated crown race, Proportional Response size-specific design, 12×100mm thru-axle, thru-tube internal routing, hidden fender mounts
Rims	RD 2.1, 28h, 21mm IW
Hubs	(F) Formula CL-712, 12×100mm centerlock
	(R) Formula RXC-400, 12×142mm centerlock
Spokes	Stainless Steel, 14g
Tires	Vittoria Zaffiro Pro Reflective, 700 × 30c
Pedals	Not included
Crank	Shimano RS510, BSA, 50/34
Bottom	Bracket Shimano BSA
Chain	Shimano HG701, 11-speed

Rear Cogs	Shimano 105 11-34, 11-speed
Front	Derailleur Shimano (TBC)
Rear	Derailleur Shimano (TBC)
Shifters	Shimano (TBC)
Handlebar	Cannondale 3, 6061 Alloy, Compact
Grips	Fabric Knurl Bar Tape
Stem	Cannondale 3, 6061 Alloy, 31.8, 7°
Headset	Synapse Sealed Bearing, integrated, 1-1/4"-1-1/8"
Brakes	Shimano (TBC) hydraulic disc, 160/160mm RT70 rotors
Brake Levers	Shimano (TBC) hydraulic
Saddle	Fizik Aliante Delta, S-alloy rails
Seatpost	Cannondale 3 SmartSense, 6061 Alloy, 27.2 × 350mm (48-56), 400mm (58-61)
Sizes	48, 51, 54, 56, 58, 61
Color 1	Smoke Black (SBK)
Color 2	Laguna Yellow (LYW)
Color 3	Jade (JDE)

Synapse Carbon 3 L

Color 1 - Jet Black

Color 2 - Purple Haze

Color 3 - Black Cherry



Specifications

C12302U

Frame	Synapse Carbon, SmartSense enabled, Proportional Response size-specific design, BSA threaded BB, flat mount brake, 12×142mm thru axle, thru-tube internal cable routing with Switch Plate, removable fender bridge, hidden rack/fender mounts
Fork	Synapse Carbon, integrated crown race, Proportional Response size-specific design, 12×100mm thru-axle, thru-tube internal routing, hidden fender mounts
Rims	RD 2.1, 28h, 21mm IW
Hubs	(F) Formula CL-712, 12×100mm centerlock / (R) Formula RXC-400, 12×142mm centerlock
Spokes	Stainless Steel, 14g
Tires	Vittoria Zaffiro Pro Reflective, 700 × 30c
Pedals	Not included
Crank	Shimano RS510, BSA, 50/34
Bottom Bracket	Shimano BSA
Chain	Shimano HG701, 11-speed
Rear Cogs	Shimano 105 11-34, 11-speed

Front Derailleur	Shimano 105, braze-on
Rear Derailleur	Shimano 105 GS
Shifters	Shimano 105 hydraulic disc, 11-speed
Handlebar	Cannondale 3, 6061 Alloy, Compact
Grips	Fabric Knurl Bar Tape
Stem	Cannondale 3, 6061 Alloy, 31.8, 7°
Headset	Synapse Sealed Bearing, integrated, 1-1/4"-1-1/8"
Brakes	Shimano 105 hydraulic disc, 160/160mm RT70 rotors
Brake Levers	Shimano 105 hydraulic
Saddle	Fizik Aliante Delta, S-alloy rails
Seatpost	Cannondale 3 SmartSense, 6061 Alloy, 27.2 × 350mm (48-56), 400mm (58-61)
Sizes	48, 51, 54, 56, 58, 61
Color 1	Jet Black (BLK)
Color 2	Purple Haze (PRH)
Color 3	Black Cherry (BCH)
Extras	SmartSense with Lights, Trainer-compatible thru-axle

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Topstone Carbon 1 Lefty

Color 1 - Tinted Rally Red

NEW INNOVATION

* Until further notice



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C15102U

Frame	Topstone Carbon, Kingpin suspension system, SmartSense enabled, 12×142mm thru-axle, dropper post compatible, DirectLine internal cable routing, removable fender bridge, multiple gear/bottle mounts
Fork	Lefty Oliver Carbon, 30mm travel, lockout, Chamber Damper w/ All-Over tune, ISO High-Ride air spring, tapered steerer, 700c, 55mm offset
Rims	HollowGram 22, Carbon, 24h front, 28h rear, 22mm deep, 25mm IW, tubeless ready
Hubs	(F) HollowGram Lefty SL, sealed bearing, 6-bolt / (R) HollowGram 12×142 6-bolt w/ DT Swiss internals rear
Spokes	Formula Grand Forza
Tires	WTB Raddler TCS Light, 700 x 44c, tubeless ready
Pedals	Not included
Crank	SRAM Force Direct Mount, 40T
Bottom Bracket	SRAM DUB BSA Road 68 Wide
Chain	SRAM Force, 12-speed
Rear Cogs	SRAM XG-1271 XPLR, 10-44, 12-speed
Rear Derailleur	SRAM Force eTap AXS XPLR
Shifters	SRAM Force eTap AXS, 12-speed
Handlebar	Cannondale 2 ShortDrop, 7050 alloy, 12 deg flare drop
Grips	Fizik Solocush Soft, 3mm
Stem	Cannondale 1, 7050 Alloy, -7°
Headset	Integrated, Carbon, 1-1/8" - 1-1/2"
Brakes	SRAM Force eTap AXS, 160/160mm CenterLine 6-bolt rotors
Brake Levers	SRAM Force eTap AXS
Saddle	Fizik Terra Argo X3, kium rails
Seatpost	SAVE Carbon, 27.2, 350mm (XS-L), 400mm (XL)
Sizes	XS, S, M, L, XL
Color 1	Tinted Rally Red (RRD)
Extras	StrapRack toolholder

Topstone Carbon 1 RLE

Color 1 - Black Pearl w/ Meteor Gray and Graphite



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C15052U

Frame	Topstone Carbon, Kingpin suspension system, SmartSense enabled, 12×142mm thru-axle, dropper post compatible, DirectLine internal cable routing, removable fender bridge, multiple gear/bottle mounts
Fork	Topstone Carbon, 1-1/8" to 1.5" steerer, 55mm OutFront offset, flat mount disc, internal routing, 12×100 thru-axle, fender/gear mounts
Rims	HollowGram 22, Carbon, 24h front, 28h rear, 22mm deep, 25mm IW, tubeless ready
Hubs	(F) HollowGram, sealed bearing 12×100mm centerlock / (R) HollowGram 12×142 centerlock w/ DT Swiss internals
Spokes	Formula Grand Forza
Tires	WTB Riddler TCS Light, 700 x 45c, tubeless ready
Pedals	Not included
Crank	SRAM Force Wide, 43/30
Bottom Bracket	SRAM DUB BSA Road 68 Wide
Chain	SRAM Force, 12-speed
Rear Cogs	SRAM XG-1270, 10-36, 12-speed
Front Derailleur	SRAM Force eTap AXS Wide, braze-on
Rear Derailleur	SRAM Force eTap AXS
Shifters	SRAM Force eTap AXS, 12-speed
Handlebar	FSA K-Wing AGX Carbon
Grips	Fizik Solocush Soft, 3mm
Stem	FSA SL-K Stem, Alloy, -6°
Headset	Integrated, Carbon, 1-1/8" - 1-1/2"
Brakes	SRAM Force eTap AXS, 160/160mm CenterLine centerlock rotors
Brake Levers	SRAM Force eTap AXS
Saddle	Fizik Terra Argo X3, kium rails
Seatpost	SAVE Carbon SmartSense, 27.2, 350mm (XS-L), 400mm (XL)
Sizes	XS, S, M, L, XL
Color 1	Black Pearl w/ Meteor Gray and Graphite (BPL)
Extras	SmartSense with Lights, Radar

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Topstone Carbon 2 Lefty

Color 1 - Gold Dust

Color 2 - Laguna Yellow w/ Butter and Mango



NEW INNOVATION

* Until further notice



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C15202U

Frame	Topstone Carbon, Kingpin suspension system, SmartSense enabled, 12×142mm thru-axle, dropper post compatible, DirectLine internal cable routing, removable fender bridge, multiple gear/bottle mounts
Fork	Lefty Oliver, 30mm travel, lockout, Chamber Damper w/ All-Over tune, ISO High-Ride air spring, tapered steerer, 700c, 55mm offset
Rims	WTB KOM Light i23 TCS, 28h, tubeless ready
Hubs	(F) Lefty SL, 6-Bolt / (R) Formula cartridge bearing, 6-Bolt, 12×142mm
Spokes	Stainless Steel, 14g
Tires	WTB Raddler TCS Light, 700 x 44c, tubeless ready
Pedals	Not included
Crank	Shimano GRX 600, 40T
Bottom Bracket	Shimano BSA 68
Chain	Shimano HG701, 11-speed
Rear Cogs	Shimano SLX, 11-42, 11-speed
Rear Derailleur	Shimano GRX 810, Shadow RD+
Shifters	Shimano GRX 800, 11-speed
Handlebar	Cannondale 2 ShortDrop, 7050 alloy, 12 deg flare drop
Grips	Fizik Solocush Soft, 3mm
Stem	Cannondale 2, 6061 Alloy, 31.8, 7°
Headset	Integrated, Carbon, 1-1/8" - 1-1/2"
Brakes	Shimano GRX 800 hydraulic disc, 160/160mm RT76 rotors
Brake Levers	Shimano GRX 800 hydraulic disc
Saddle	Fizik Terra Argo X5, S-alloy rails
Seatpost	Cannondale DownLow Dropper Post, 27.2, 60/80/100mm travel, shifter-integrated lever
Sizes	XS, S, M, L, XL
Color 1	Gold Dust (GDT)
Color 2	Laguna Yellow w/ Butter and Mango (LYW)
Extras	StrapRack toolholder

Topstone Carbon 2 L

Color 1 - Chalk w/ Black

Color 2 - Jade w/ Sage and Pine





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C15252U

Frame	Topstone Carbon, Kingpin suspension system, SmartSense enabled, 12×142mm thru-axle, dropper post compatible, DirectLine internal cable routing, removable fender bridge, multiple gear/bottle mounts
Fork	Topstone Carbon, 1-1/8" to 1.5" steerer, 55mm OutFront offset, flat mount disc, internal routing, 12×100 thru-axle, fender/gear mounts
Rims	WTB KOM Light i23 TCS, 28h, tubeless ready
Hubs	(F) Formula cartridge bearing, 12×100mm centerlock / (R) Formula cartridge bearing, 12×142mm centerlock
Spokes	Stainless Steel, 14g
Tires	WTB Riddler TCS Light, 700 x 45c, tubeless ready
Pedals	Not included
Crank	Shimano GRX 800, 48/31
Bottom Bracket	Shimano BSA 68
Chain	Shimano HG701, 11-speed
Rear Cogs	Shimano HG800, 11-34, 11-speed
Front Derailleur	Shimano GRX 800, braze-on
Rear Derailleur	Shimano GRX 810, Shadow RD+
Shifters	Shimano GRX 800, 11-speed
Handlebar	Cannondale 2 ShortDrop, 7050 alloy, 12 deg flare drop
Grips	Fizik Solocush Soft, 3mm
Stem	Cannondale 2, 6061 Alloy, 31.8, 7°
Headset	Integrated, Carbon, 1-1/8" - 1-1/2"
Brakes	Shimano GRX 800 hydraulic disc, 160/160mm MT800 rotors
Brake Levers	Shimano GRX 800 hydraulic disc
Saddle	Fizik Terra Argo X5, S-alloy rails
Seatpost	SAVE Carbon SmartSense, 27.2, 350mm (XS-L), 400mm (XL)
Sizes	XS, S, M, L, XL
Color 1	Chalk w/ Black (CHK)
Color 2	Jade w/ Sage and Pine (JDE)
Extras	SmartSense with Lights

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Topstone Carbon 3

Color 1 - Carbon

Color 2 - Quicksand w/ Black Cherry and Smoke Black



NEW INNOVATION

* Until further notice



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C15372U

Frame	Topstone Carbon, Kingpin suspension system, SmartSense enabled, 12×142mm thru-axle, dropper post compatible, DirectLine internal cable routing, removable fender bridge, multiple gear/bottle mounts
Fork	Topstone Carbon, 1-1/8" to 1.5" steerer, 55mm OutFront offset, flat mount disc, internal routing, 12×100 thru-axle, fender/gear mounts
Rims	WTB ST i23 TCS, 28h, tubeless ready
Hubs	(F) Formula cartridge bearing, 12×100mm centerlock / (R) Formula cartridge bearing, 12×142mm centerlock
Spokes	Stainless Steel, 14g
Tires	WTB Riddler TCS Light, 700 x 45c, tubeless ready
Pedals	Not included
Crank	Shimano GRX 600, 46/30
Bottom Bracket	Shimano BSA 68
Chain	Shimano HG601, 11-speed
Rear Cogs	Shimano HG700, 11-34, 11-speed
Front Derailleur	Shimano GRX 800, braze-on
Rear Derailleur	Shimano GRX 810, Shadow RD+
Shifters	Shimano GRX 600, 11-speed
Handlebar	Cannondale 3, butted 6061 Alloy, 16 deg flare drop
Grips	Fizik Solocush Soft, 3mm
Stem	Cannondale 3, 6061 Alloy, 31.8, 7°
Headset	Integrated, 1-1/8" - 1-1/2"
Brakes	Shimano GRX 600 hydraulic disc, 160/160mm RT64 rotors
Brake Levers	Shimano GRX 600 hydraulic disc
Saddle	Fizik Aliante Delta, S-alloy rails
Seatpost	Cannondale 3 SmartSense, 6061 Alloy, 27.2 × 350mm
Sizes	XS, S, M, L, XL
Color 1	Carbon (CRB)
Color 2	Quicksand w/ Black Cherry and Smoke Black (QSD)
Extras	StrapRack toolholder

Topstone Carbon 3 (650b)

Color 1 - Carbon

Color 2 - Quicksand w/ Black Cherry and Smoke Black





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C15362U

Frame	Topstone Carbon, Kingpin suspension system, SmartSense compatible, Proportional Response construction, 12×142mm thru-axle, 27.2 dropper post compatible, BSA 68mm threaded BB, DirectLine internal cable routing, removable fender bridge, multiple gear/bottle mounts
Fork	Topstone Carbon, 1-1/8" to 1.5" steerer, 55mm OutFront offset, flat mount disc, internal routing, 12×100 thru-axle, triple bottle/gear mounts, fender mounts
Rims	WTB ST i25 TCS, 650b, 28h, tubeless ready
Hubs	(F) Formula cartridge bearing, 12×100mm, centerlock / (R) Formula cartridge bearing, 12×142mm, centerlock
Spokes	Stainless Steel, 14g
Tires	WTB Sendero TCS Light, 650 x 47c (47-584), tubeless ready
Pedals	Not included
Crank	Shimano GRX 600, 46/30
Bottom Bracket	Bottom Bracket
Chain	Shimano HG601, 11-speed
Rear Cogs	Shimano HG700, 11-34, 11-speed
Front Derailleur	Shimano GRX 800, braze-on=
Rear Derailleur	Shimano GRX 810, Shadow RD+
Shifters	Shimano GRX 600, 11-speed
Handlebar	Cannondale 3, butted 6061 Alloy, 16 deg flare drop
Grips	Fizik Solocush Soft, 3mm
Stem	Cannondale 3, 6061 Alloy, 31.8, 7°
Headset	Integrated, 1-1/8" - 1-1/2"
Brakes	Shimano GRX 600 hydraulic disc, 160/160mm RT64 rotors
Brake Levers	Shimano GRX 600 hydraulic disc
Saddle	Fizik Aliante Delta, S-alloy rails
Seatpost	Cannondale 3, 6061 Alloy, 27.2 × 350mm
Connectivity	Cannondale Wheel Sensor
Sizes	XS, S, M, L, XL
Color 1	Carbon (CRB)
Color 2	Quicksand w/ Black Cherry and Smoke Black(QSD)
Extras	StrapRack toolholder

Topstone Carbon 4

Color 1 - Smoke Black w/ Jet Black and Stealth Gray

Color 2 - Olive Green



NEW INNOVATION



* Until further notice

Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C15402U

Frame	Topstone Carbon, Kingpin suspension system, SmartSense compatible, 12×142mm thru-axle, 27.2 dropper post ready, BSA 68mm threaded BB, DirectLine internal cable routing, removable fender bridge, multiple gear/bottle mounts
Fork	Topstone Carbon, 1-1/8" to 1.5" steerer, 55mm OutFront offset, flat mount disc, internal routing, 12×100 thru-axle, triple bottle/gear mounts, fender mounts
Rims	WTB ST i23 TCS, 700c, 28h, tubeless ready
Hubs	(F) Formula cartridge bearing, 12×100mm, centerlock / (R) Formula cartridge bearing, 12×142mm, centerlock
Spokes	Stainless Steel, 14g
Tires	WTB Riddler Comp, 700 × 45c
Pedals	Not included
Crank	Shimano GRX 600, 46/30
Bottom Bracket	Shimano BSA 68
Chain	KMC X10, 10-speed
Rear Cogs	Shimano HG500, 11-34, 10-speed

Front Derailleur	Shimano GRX 400, braze-on
Rear Derailleur	Shimano GRX 400, Shadow RD+
Shifters	Shimano GRX 400, 10-speed
Handlebar	Cannondale 3, butted 6061 Alloy, 16 deg flare drop
Grips	Fizik Solocush Soft, 3mm
Stem	Cannondale 3, 6061 Alloy, 31.8, 7°
Headset	Integrated, 1-1/8" - 1-1/2"
Brakes	Shimano GRX 400 hydraulic disc, 160/160mm RT54 rotors
Brake Levers	Shimano GRX 400 hydraulic disc
Saddle	Fizik Aliante Delta, S-alloy rails
Seatpost	Cannondale 3, 6061 Alloy, 27.2 × 350mm
Sizes	XS, S, M, L, XL
Color 1	Smoke Black w/ Jet Black and Stealth Gray (SBK)
Color 2	Olive Green (OGN)
Extras	StrapRack toolholder

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Topstone LTD

Color 1 - Green



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C15502U

Frame	Lightweight SmartForm C2 Alloy, 12×142 thru-axle, tapered headtube, BSA threaded BBm flat mount disc, StraightShot internal cable routing, multiple gear/bottle mounts
Fork	Topstone Carbon, 1-1/8" to 1.5" steerer, 55mm OutFront offset, flat mount disc, internal routing, 12×100 thru-axle, fender/gear mounts
Rims	WTB KOM Light i23 TCS, 28h, tubeless ready
Hubs	(F) Formula cartridge bearing, 12×100mm centerlock / (R) Formula cartridge bearing, 12×142mm centerlock
Spokes	Stainless Steel, 14g
Tires	WTB Riddler TCS Light, 700 x 37c, tubeless ready
Pedals	Not included
Crank	Shimano GRX 600, 46/30
Bottom Bracket	Shimano BBRS500
Chain	KMC X11, 11-speed

Rear Cogs	Shimano 105, 11-34, 11-speed
Front Derailleur	Shimano GRX 800, braze-on
Rear Derailleur	Shimano GRX 810, Shadow RD+
Shifters	Shimano GRX 800, 11-speed
Handlebar	Cannondale 3, butted 6061 Alloy, 16 deg flare drop
Grips	Cannondale Bar Tape, 3.5mm
Stem	Cannondale 3, 6061 Alloy, 31.8, 7°
Headset	Integrated, 1-1/8" - 1-1/2"
Brakes	Shimano GRX 800 hydraulic disc, 160/160mm RT54 rotors
Brake Levers	Shimano GRX 800 hydraulic disc
Saddle	Fizik Aliante Delta, S-alloy rails
Seatpost	Cannondale 3, 6061 Alloy, 27.2 × 350mm
Sizes	XS, S, M, L, XL
Color 1	Green (GRN)

Topstone 1

Color 1 - Mercury

Color 2 - Cinnamon





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C15602U

Frame	Lightweight SmartForm C2 Alloy, 12×142 thru-axle, tapered headtube, BSA threaded BBm flat mount disc, StraightShot internal cable routing, multiple gear/bottle mounts
Fork	Topstone Carbon, 1-1/8" to 1.5" steerer, 55mm OutFront offset, flat mount disc, internal routing, 12×100 thru-axle, fender/gear mounts
Rims	WTB ST i23 TCS, 28h, tubeless ready
Hubs	(F) Formula cartridge bearing, 12×100mm centerlock / (R) Formula cartridge bearing, 12×142mm centerlock
Spokes	Stainless Steel, 14g
Tires	WTB Riddler TCS Light, 700 x 37c, tubeless ready
Pedals	Not included
Crank	Shimano GRX 600, 46/30
Bottom Bracket	Shimano BBRS500
Chain	KMC X11, 11-speed

Rear Cogs	Shimano 105, 11-34, 11-speed
Front Derailleur	Shimano GRX 800, braze-on
Rear Derailleur	Shimano GRX 810, Shadow RD+
Shifters	Shimano GRX 600, 11-speed
Handlebar	Cannondale 3, butted 6061 Alloy, 16 deg flare drop
Grips	Cannondale Bar Tape, 3.5mm
Stem	Cannondale 3, 6061 Alloy, 31.8, 7°
Headset	Integrated, 1-1/8" - 1-1/2"
Brakes	Shimano GRX 400 hydraulic disc, 160/160mm RT54 rotors
Brake Levers	Shimano GRX 600 hydraulic disc
Saddle	Fizik Aliante Delta, S-alloy rails
Seatpost	Cannondale 3, 6061 Alloy, 27.2 × 350mm
Sizes	XS, S, M, L, XL
Color 1	Mercury (MRC)
Color 2	Cinnamon (CIN)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Topstone 2

Color 1 - Midnight

Color 2 - Olive Green





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C15702U

Frame	Lightweight SmartForm C2 Alloy, 12×142 thru-axle, tapered headtube, BSA threaded BBm flat mount disc, StraightShot internal cable routing, multiple gear/bottle mounts
Fork	Topstone Carbon, 1-1/8" to 1.5" steerer, 55mm OutFront offset, flat mount disc, internal routing, 12×100 thru-axle, fender/gear mounts
Rims	WTB ST i23 TCS, 28h, tubeless ready
Hubs	(F) Formula cartridge bearing, 12×100mm centerlock / (R) Formula cartridge bearing, 12×142mm centerlock
Spokes	Stainless Steel, 14g
Tires	WTB Riddler TCS Light, 700 x 37c, tubeless ready
Pedals	Not included
Crank	FSA Omega AGX+ Alloy, 46/30
Bottom Bracket	FSA Cartridge
Chain	KMC X10, 10-speed
Rear Cogs	Shimano HG500, 11-34, 10-speed
Front Derailleur	Shimano GRX 400, braze-on
Rear Derailleur	Shimano GRX 400, Shadow RD+
Shifters	Shimano GRX 400, 10-speed
Handlebar	Cannondale 3, butted 6061 Alloy, 16 deg flare drop
Grips	Cannondale Bar Tape, 3.5mm
Stem	Cannondale 3, 6061 Alloy, 31.8, 7°
Headset	Integrated, 1-1/8" - 1-1/2"
Brakes	Shimano GRX 400 hydraulic disc, 160/160mm RT54 rotors
Brake Levers	Shimano GRX 400 hydraulic disc
Saddle	Fizik Aliante Delta, S-alloy rails
Seatpost	Cannondale 3, 6061 Alloy, 27.2 × 350mm
Sizes	XS, S, M, L, XL
Color 1	Midnight (MDN)
Color 2	Olive Green (OGN)

Topstone 3

Color 1 - Grey

Color 2 - Turquoise





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C15802U

Frame	Lightweight SmartForm C2 Alloy, 12×142 thru-axle, tapered headtube, BSA threaded BBm flat mount disc, StraightShot internal cable routing, multiple gear/bottle mounts
Fork	Topstone Carbon, 1-1/8" to 1.5" steerer, 55mm OutFront offset, flat mount disc, internal routing, 12×100 thru-axle, fender/gear mounts
Rims	GXD 1.0, 28h
Hubs	(F) Formula alloy, 12×100mm / (R) Formula alloy, 12×142mm
Spokes	Stainless Steel, 14g
Tires	WTB Riddler Comp, 700 × 37c
Pedals	Not included
Crank	FSA Tempo Adventure, 46/30
Bottom Bracket	Cartridge, square taper
Chain	KMC Z9, 9-speed
Rear Cogs	Sunrace, 11-34, 9-speed
Front Derailleur	Shimano Sora GS
Rear Derailleur	Shimano Sora GS
Shifters	Shimano Sora, 9-speed
Handlebar	Cannondale 3, butted 6061 Alloy, 16 deg flare drop
Grips	Cannondale Bar Tape, 3.5mm
Stem	Cannondale 3, 6061 Alloy, 31.8, 7°
Headset	Integrated, 1-1/8" - 1-1/2"
Brakes	Promax Decoder R mechanical disc, 160/160mm rotors
Brake Levers	Shimano Sora
Saddle	Fizik Aliante Delta, S-alloy rails
Seatpost	Cannondale 4, 6061 Alloy, 27.2 × 350mm
Sizes	XS, S, M, L, XL
Color 1	Grey (GRY)
Color 2	Turquoise (TRQ)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Topstone 4

Color 1 - Black Magic

Color 2 - Mango





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C15902U


Frame	Lightweight SmartForm C2 Alloy, 12×142 thru-axle, tapered headtube, BSA threaded BBm flat mount disc, StraightShot internal cable routing, multiple gear/bottle mounts
Fork	Topstone Carbon, 1-1/8" to 1.5" steerer, 55mm OutFront offset, flat mount disc, internal routing, 12×100 thru-axle, fender/gear mounts
Rims	GXD 1.0, 28h
Hubs	(F) Formula alloy, 12×100mm / (R) Formula alloy, 12×142mm
Spokes	Stainless Steel, 14g
Tires	WTB Riddler Comp, 700 × 37c
Pedals	Not included
Crank	Prowheel, Charm 40T
Bottom Bracket	Cartridge, square taper
Chain	KMC X10, 10-speed
Rear Cogs	microSHIFT, 11-48, 10-speed

Rear Derailleur	microSHIFT Advent X
Shifters	microSHIFT Advent X, 10-speed
Handlebar	Cannondale 3, butted 6061 Alloy, 16 deg flare drop
Grips	Cannondale Bar Tape, 3.5mm
Stem	Cannondale 3, 6061 Alloy, 31.8, 7°
Headset	Integrated, 1-1/8" - 1-1/2"
Brakes	Promax Render R mechanical disc, 160/160mm rotors
Brake Levers	microSHIFT Advent X
Saddle	Cannondale Stage CX
Seatpost	Cannondale 4, 6061 Alloy, 27.2 × 350mm
Sizes	XS, S, M, L, XL
Color 1	Black Magic (BLK)
Color 2	Mango (MGO)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022


SystemSix

	47	51	54	56	58	60	62
A **Seat Tube Length (cm)**	38.5	43.3	48.2	53.0	55.3	57.7	60.0
B **Top Tube Horizontal (cm)**	51.4	52.9	54.4	56	57.6	59.2	60.9
C **Head Tube Angle**	71.2°	71.2°	73.0°	73.0°	73.0°	72.9°	72.9°
D **Seat Tube Angle Effective**	74.5°	74.1°	73.7°	73.3°	72.9°	72.5°	72.1°
E **Standover (cm)**	68.0	72.3	76.2	79.8	82.1	84.3	86.3
F **Head Tube Length (cm)**	8.8	11.4	12.8	14.9	17.2	19.3	21.4
G **Wheelbase (cm)**	97.4	98.9	97.5	98.7	100	101.2	102.4
H **Front Center (cm)**	58.2	59.5	58.1	59.3	60.5	61.7	62.9
I **Chain Stay Length (cm)**	40.5	40.5	40.5	40.5	40.5	40.5	40.5
J **Bottom Bracket Drop (cm)**	7.9	7.4	7.2	7.2	6.9	6.9	6.9
K **Bottom Bracket Height (cm)**	26.1	26.6	26.9	26.9	27.1	27.1	27.1
L **Fork Rake (cm)**	5.5	5.5	4.5	4.5	4.5	4.5	4.5
M **Trail (cm)**	5.8	5.8	5.7	5.7	5.7	5.8	5.8
N **Stack (cm)**	50	52	54	56	58	60	62
O **Reach (cm)**	37.5	38.1	38.6	39.2	39.8	40.3	40.9

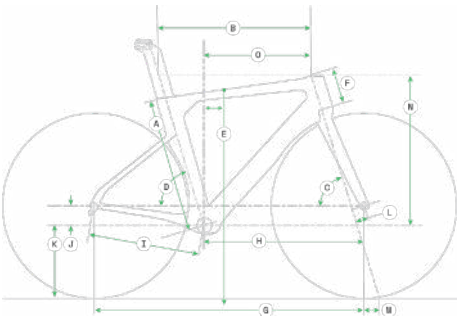


SuperSix EVO

	44	48	51	54	56	58	60	62
A **Seat Tube Length (cm)**	40	43.8	47.7	51.5	53.6	55.8	57.9	60
B **Top Tube Horizontal (cm)**	51.2	52	52.8	54.6	56.2	57.8	59.4	61.1
C **Top Tube Actual (cm)**	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
D **Head Tube Angle**	70.9°	71.2°	71.2°	71.2°	73.0°	73.0°	73.0°	73.0°
E **Seat Tube Angle Effective**	74.3°	74.3°	74.3°	73.7°	73.3°	72.9°	72.5°	72.1°
F **Standover (cm)**	69.8	72.6	75.6	78.8	80.8	83.1	85.0	87.0
G **Head Tube Length (cm)**	9.9	11.4	13	15.3	16.4	18.8	20.9	23
H **Wheelbase (cm)**	97.9	98.5	99.4	100.8	99.2	100.5	101.6	102.8
I **Front Center (cm)**	58.2	58.8	59.7	61.1	59.5	60.7	61.8	63
J **Chain Stay Length (cm)**	40.8	40.8	40.8	40.8	40.8	40.8	40.8	40.8
K **Bottom Bracket Drop (cm)**	7.4	7.4	7.4	7.2	7.2	6.9	6.9	6.9
L **Bottom Bracket Height (cm)**	26.8	26.8	26.8	27.1	27.1	27.3	27.3	27.3
M **Fork Rake (cm)**	5.5	5.5	5.5	5.5	4.5	4.5	4.5	4.5
N **Trail (cm)**	6	5.8	5.8	5.8	5.8	5.8	5.8	5.8
O **Stack (cm)**	50.4	51.9	53.4	55.4	57.4	59.4	61.4	63.4
P **Reach (cm)**	37	37.4	37.8	38.4	39	39.5	40	40.6

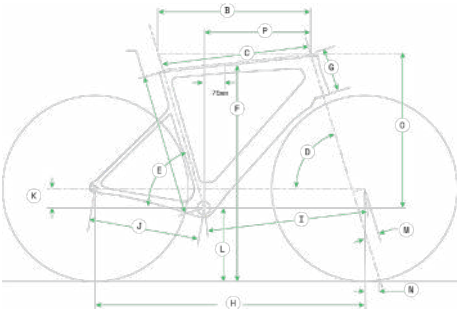


CAAD13

	44	48	51	54	56	58	60	62
A **Seat Tube Length (cm)**	40.4	44.2	48.1	51.9	54.0	56.2	58.3	60.4
B **Top Tube Horizontal (cm)**	51	52	53	54.6	56.2	57.8	59.4	61.1
C **Top Tube Actual (cm)**	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
D **Head Tube Angle**	70.9°	71.2°	71.2°	71.2°	73°	73°	73°	73°
E **Seat Tube Angle**	74.5°	74.3°	74.1°	73.7°	73.3°	72.9°	72.5°	72.1°
F **Standover (cm)**	68.6	72.3	75.3	79	80.5	82.9	84.8	86.8
G **Head Tube Length (cm)**	9.4	11.4	13	15.4	16.4	18.8	20.9	23
H **Wheelbase (cm)**	97.6	98.5	99.4	100.8	99.2	100.5	101.6	102.8
I **Front Center (cm)**	58.1	58.9	59.8	61.1	59.4	60.7	61.8	63
J **Chain Stay Length (cm)**	40.8	40.8	40.8	40.8	40.8	40.8	40.8	40.8
K **Bottom Bracket Drop (cm)**	7.9	7.4	7.4	7.2	7.2	6.9	6.9	6.9
L **Bottom Bracket Height (cm)**	26.3	26.8	26.8	27.1	27.1	27.3	27.3	27.3
M **Fork Rake (cm)**	5.5	5.5	5.5	5.5	4.5	4.5	4.5	4.5
N **Trail (cm)**	6.0	5.8	5.8	5.8	5.8	5.8	5.8	5.8
O **Stack (cm)**	50.5	52	53.5	55.5	57.5	59.5	61.5	63.5
P **Reach (cm)**	37	37.4	37.8	38.4	38.9	39.5	40	40.6

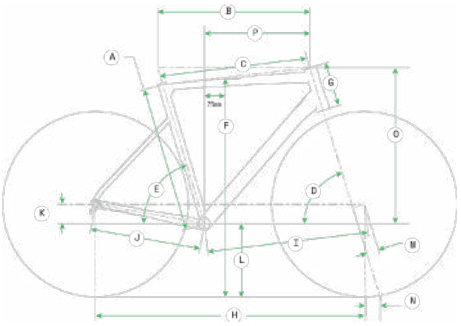

CAAD Optimo


	48	51	54	56	58
A **Seat Tube Length (cm)**	44	46.7	49.5	52.2	54.9
B **Top Tube Horizontal (cm)**	52	53	54.6	56.2	57.8
C **Top Tube Actual (cm)**	N/A	N/A	N/A	N/A	N/A
D **Head Tube Angle**	71.9°	72.6°	72.6°	72.6°	72.6°
E **Seat Tube Angle**	74.3°	74°	73.7°	73.3°	72.9°
F **Standover (cm)**	70.9	73.1	75.8	78.2	80.8
G **Head Tube Length (cm)**	10.8	12.1	14.4	16.5	18.9
H **Wheelbase (cm)**	97.8	98	99.4	100.6	101.9
I **Front Center (cm)**	57.5	57.6	59	60.2	61.4
J **Chain Stay Length (cm)**	41.5	41.5	41.5	41.5	41.5
K **Bottom Bracket Drop (cm)**	7.4	7.4	7.2	7.2	6.9
L **Bottom Bracket Height (cm)**	26.8	26.8	27	27	27.3
M **Fork Rake (cm)**	4.8	4.8	4.8	4.8	4.8
N **Trail (cm)**	6.1	5.7	5.7	5.7	5.7
O **Stack (cm)**	52	53.5	55.5	57.5	59.5
P **Reach (cm)**	37.4	37.7	38.4	39	39.5

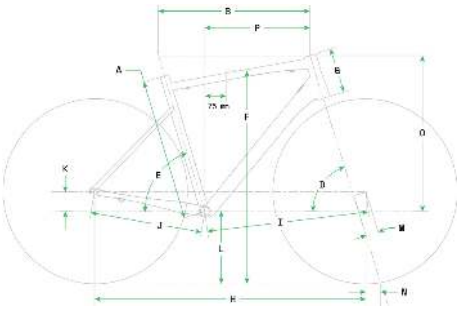

* Indicates same as previous


Synapse Carbon

	44	48	51	54	56	58	61
A **Seat Tube Length (cm)**	37.0	40.7	44.3	48.0	52.0	55.0	59.0
B **Top Tube Horizontal (cm)**	50.5	51.7	53.1	54.7	56.1	57.9	60.4
C **Head Tube Angle**	70.2°	70.8°	71.7°	71.7°	73.0°	73.0°	73.0°
D **Seat Tube Angle**	74.7°	74.6°	74.3°	73.9°	73.5°	73.0°	72.5°
E **Standover (cm)**	68	71.2	74.2	77.3	80.4	83.3	86.8
F **Head Tube Length (cm)**	10.3	12.2	13.7	16.1	17.3	19.7	22.9
G **Wheelbase (cm)**	98.9	99.6	99.4	100.8	99.5	100.9	102.8
H **Front Center (cm)**	59.1	59.8	59.6	60.9	59.6	60.9	62.7
I **Chain Stay Length (cm)**	41.0	41.0	41.0	41.0	41.0	41.0	41.0
J **Bottom Bracket Drop (cm)**	7.5	7.5	7.5	7.3	7.3	7.0	7.0
K **Bottom Bracket Height (cm)**	27.0	27.0	27.0	27.2	27.2	27.5	27.5
L **Fork Rake (cm)**	6.0	6.0	5.5	5.5	4.5	4.5	4.5
M **Trail (cm)**	6	5.6	5.6	5.6	5.8	5.8	5.8
N **Stack (cm)**	51	53	55	57	59	61	64
O **Reach (cm)**	36.5	37.1	37.7	38.2	38.6	39.3	40.2

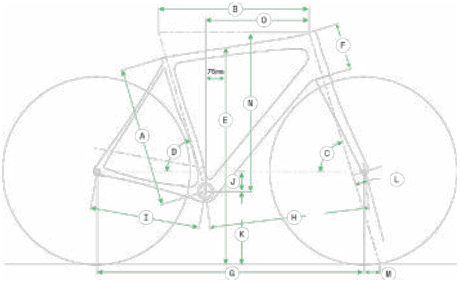


Topstone Carbon Lefty

	XS	S	M	L	XL
A **Seat Tube Length (cm)**	41.0	45.8	50.5	55.3	60.0
B **Top Tube Horizontal (cm)**	52.5	54.4	56.1	57.9	59.6
C **Top Tube Actual (cm)**	N/A	N/A	N/A	N/A	N/A
D **Head Tube Angle**	70.0°	71.2°	71.2°	71.2°	71.2°
E **Seat Tube Angle Effective**	73.1°	73.1°	73.1°	73.1°	73.1°
F **Standover (cm)**	71.0	75.6	79.8	83.8	88.0
G **Head Tube Length (cm)**	9.7	13.1	16.5	19.8	23.2
H **Wheelbase (cm)**	99.9	101.0	103.0	104.9	106.8
I **Front Center (cm)**	59.4	60.4	62.3	64.2	66.0
J **Chain Stay Length (cm)**	41.5	41.5	41.5	41.5	41.5
K **Bottom Bracket Drop (cm)**	6.9	6.4	6.1	6.1	5.9
L **Bottom Bracket Height (cm)**	26.8	27.3	27.6	27.6	27.8
M **Fork Rake (cm)**	5.5	5.5	5.5	5.5	5.5
N **Trail (cm)**	6.4	5.7	5.7	5.7	5.7
O **Stack (cm)**	51.8	55.0	57.9	61.0	64.1
P **Reach (cm)**	36.8	37.7	38.5	39.4	40.1

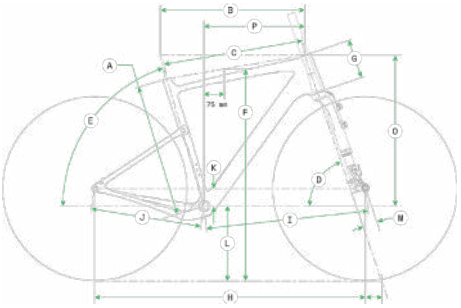


Topstone Carbon

	XS	SM	MD	LG	XL
A **Seat Tube Length (cm)**	41.0	45.8	50.5	55.3	60.0
B **Top Tube Horizontal (cm)**	52.5	54.4	56.1	57.9	59.6
C **Top Tube Actual (cm)**	N/A	N/A	N/A	N/A	N/A
D **Head Tube Angle**	70.0°	71.2°	71.2°	71.2°	71.2°
E **Seat Tube Angle**	73.1°	73.1°	73.1°	73.1°	73.1°
F **Standover (cm)**	71.5	76.1	80.3	84.3	88.5
G **Head Tube Length (cm)**	9.7	13.1	16.5	19.8	23.2
H **Wheelbase (cm)**	99.9	101.0	103.0	104.0	106.0
I **Front Center (cm)**	59.4	60.4	62.3	64.2	66.0
J **Chain Stay Length (cm)**	41.5	41.5	41.5	41.5	41.5
K **Bottom Bracket Drop (cm)**	6.9	6.4	6.1	6.1	5.9
L **Bottom Bracket Height (cm)**	27.3	27.8	28.0	28.0	28.3
M **Fork Rake (cm)**	5.5	5.5	5.5	5.5	5.5
N **Trail (cm)**	6.6	5.8	5.8	5.8	5.8
O **Stack (cm)**	51.8	54.9	57.9	61.0	64.0
P **Reach (cm)**	36.8	37.7	38.5	39.4	40.2

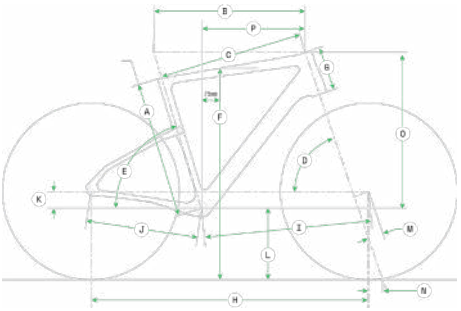

Topstone

	XS	SM	MD	LG	XL
A **Seat Tube Length (cm)**	41.0	45.8	50.5	55.3	60.0
B **Top Tube Horizontal (cm)**	52.5	54.4	56.1	57.9	59.6
C **Head Tube Angle**	70°	71°	71°	71°	71°
D **Seat Tube Angle**	73.1°	73.1°	73.1°	73.1°	73.1°
E **Standover (cm)**	70.3	74.4	78.4	82.5	86.3
F **Head Tube Length (cm)**	8.9	11.8	14.9	18.2	21.4
G **Wheelbase (cm)**	101.1	102.2	104.0	106.0	107.8
H **Front Center (cm)**	59.3	60.3	62.1	64.1	65.9
I **Chain Stay Length (cm)**	43.0	43.0	43.0	43.0	43.0
J **Bottom Bracket Drop (cm)**	7.5	7.5	7.5	7.5	7.5
K **Bottom Bracket Height (cm)**	28.4	28.4	28.4	28.4	28.4
L **Fork Rake (cm)**	5.5	5.5	5.5	5.5	5.5
M **Trail (cm)**	7.2	6.5	6.5	6.5	6.5
N **Stack (cm)**	51.8	54.9	57.9	61.0	64.0
O **Reach (cm)**	36.8	37.7	38.5	39.4	40.2

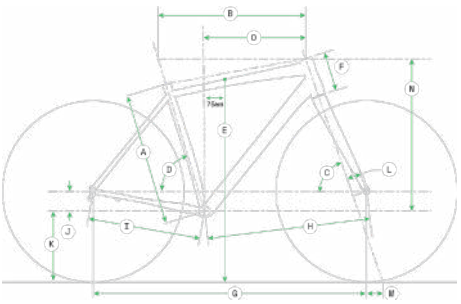

* Indicates same as previous


Mountain
GRAVITY
TRAIL
CROSS COUNTRY
DIRT JUMP

Mountain

Trail


Jekyll


Habit LT


Habit


Habit HT


Scalpel SE


Trail SL


Trail


Dave

Cross Country


Scalpel


Scalpel HT

Jekyll 1

Color 1 - Beetle Green



Specifications

C21102U

Frame	All-New, 165mm travel, Carbon, Proportional Response Tuned, Guidler idler pulley/chainguide, BSA 73, ISCG05, tapered head tube, Ai Offset
Fork	Fox Float Factory 38, 170mm, 15×110mm thru-axle, tapered steerer, 44mm offset
Rear Shock	Fox Float Factory X2, 205×65 Metric Trunnion, Air, Adjustable High Speed/Low Speed Compression, High Speed/Low Speed Rebound
Rims	WTB KOM Trail i30 TCS, 32h, tubeless ready
Hubs	(F) Formula, 15×110mm thru-axle / (R) SRAM MTH 700, 12×148mm, XD Driver
Spokes	DT Swiss Factory J -Bend
Tires	(F) Maxxis Assegai, 29 × 2.5", 3C compound, EXO+ puncture protection, tubeless ready, (R) Maxxis Minion DHR II, 29 × 2.4", EXO+, tubeless ready
Pedals	Not included
Crank	SRAM X1 Eagle B148 CL55, 30T
Bottom Bracket	SRAM DUB BSA MTB73
Chain	SRAM NX Eagle, 12-speed
Rear Cogs	SRAM XG-1275, GX Eagle, 10-52, 12-speed
Rear Derailleur	SRAM XO1 Eagle
Shifters	SRAM GX Eagle, 12-speed
Handlebar	Cannondale 1 Riser, Carbon, 30mm rise, 8° sweep, 5° rise, 780mm
Grips	Fabric Funguy
Stem	FSA Grid 35, 35mm
Headset	Integrated Sealed Bearing, Tapered
Brakes	SRAM Code RSC hydraulic disc, 220/200mm CenterLine rotors
Brake Levers	SRAM Code RSC hydraulic disc
Saddle	Fabric Scoop Shallow Elite, hollow cro-mo rails
Seatpost	Cannondale DownLow Dropper w/ Matchmaker lever, 31.6, 125mm (S), 150mm (M), 170mm (L-XL)
Sizes	SM, MD, LG, XL
Color 1	Beetle Green (BGN)
Extras	Jekyll Custom Fender

Jekyll 2

Color 1 - Purple Haze

Color 2 - Graphite





Specifications

C21202U

Frame	All-New, 165mm travel, Carbon, Proportional Response Tuned, Guidler idler pulley/chainguide, BSA 73, ISCG05, tapered head tube, Ai Offset
Fork	RockShox Zeb Select, 170mm, 15×110mm thru-axle, tapered steerer, 44mm offset
Rear Shock	Fox Float DPX2 Performance EVOL, 205×65 Metric Trunnion, Air, 3-Pos adj.
Rims	WTB STX i30 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle / (R) Shimano MT410 12×148mm thru-axle
Spokes	Stainless steel, 14g
Tires	(F) Maxxis Assegai, 29 × 2.5", Dual compound, EXO+ puncture protection, tubeless ready, (R) Maxxis Minion DHR II, 29 × 2.4", EXO+, tubeless ready
Pedals	Not included
Crank	Shimano Deore 6120, 30T, 55mm CL
Bottom Bracket	Shimano Deore BSA 73
Chain	Shimano Deore 6100, 12-speed
Rear Cogs	Shimano Deore M6100, 10-51, 12-speed
Rear Derailleur	Shimano Deore M6100
Shifters	Shimano Deore M6100, 12-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 30mm rise, 8° sweep, 6° rise, 780mm
Grips	Fabric Funguy
Stem	Cannondale 3, 6061 Alloy, 31.8, 0°
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano M6120 hydraulic disc, 203/203mm RT64 rotors
Brake Levers	Shimano M6120 hydraulic disc
Saddle	Cannondale Stage 3
Seatpost	TranzX dropper, internal routing, 31.6, 130mm (S), 150mm (M - XL)
Sizes	SM, MD, LG, XL
Color 1	Purple Haze (PRH)
Color 2	Graphite (GRA)
Extras	Jekyll Custom Fender

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Habit Carbon LT Ultimate

Color 1 - Meteor Grey



Specifications

C23052U

Frame	Habit Full Carbon, 140mm travel, Proportional Response Suspension and Geo, 55mm chainline, ISCG05, BSA threaded BB, post mount brake, tapered headtube, DirectLine internal cable routing, UDH hanger
Fork	RockShox Lyrik Ultimate, 150mm, DebonAir, 15×110mm thru-axle, tapered steered, 42mm offset
Rear Shock	RockShox Super Deluxe Ultimate, DebonAir, 2-Pos mode adjust, adjustable rebound
Rims	DT Swiss EX1700 Spline, tubeless ready
Hubs	(F) DT Swiss 350, 15×110mm thru-axle / (R) DT Swiss 350 with Ratchet System 36T SL, 12×148mm thru-axle
Spokes	DT Competition Race, straight pull
Tires	(F) Maxxis Minion DHF, 29×2.4" (27.5×2.4" - XS), 3C, EXO+, tubeless ready, (R) Maxxis Dissector, 29×2.4" (27.5×2.4" - XS), 3C, EXO+, tubeless ready
Pedals	Not included
Crank	SRAM X1 Carbon Eagle DUB, 30T, 55mm chainline
Bottom Bracket	SRAM DUB BSA MTB73 Wide
Chain	SRAM X01 Eagle, 12-speed
Rear Cogs	SRAM XG-1295, X01 Eagle, 10-52, 12-speed
Rear Derailleur	SRAM X01 Eagle AXS
Shifters	SRAM Eagle AXS, 12-speed
Handlebar	HollowGram SAVE riser bar, Carbon, 35mm clamp, 30mm rise, 8° sweep, 5° rise, 780mm
Grips	Fabric FunGuy
Stem	Cannondale 1, 7075 Alloy, 1-1/8", 35mm, 0°
Headset	Integrated Sealed Bearing, Tapered
Brakes	SRAM Code RSC hydraulic disc, 4-piston, CenterLine 200/180mm rotors
Brake Levers	SRAM Code RSC hydraulic disc
Saddle	Fabric Scoop Shallow Elite, cro-mo rails
Seatpost	RockShox Reverb AXS, 31.6, 125mm (XS-S), 150mm (M), 170mm (L, XL)
Sizes	XS,SM,MD,LG,XL
Color 1	Meteor Grey (MTG)
Extras	StrapRack tool/stuff holder

Habit Carbon LT 1

Color 1 - Chalk



Specifications

C23152U

Frame	Habit Full Carbon, 140mm travel, Proportional Response Suspension and Geo, 55mm chainline, ISCG05, BSA threaded BB, post mount brake, tapered headtube, DirectLine internal cable routing, UDH hanger
Fork	RockShox Lyrik Select+, 150mm, DebonAir, 15×110mm thru-axle, tapered steered, 42mm offset
Rear Shock	RockShox Super Deluxe Select+, DebonAir, 2-Pos mode adjust, adjustable rebound
Rims	WTB KOM Trail i30 TCS, 32h, tubeless ready
Hubs	(F) Formula 15×110mm thru-axle / (R) DT Swiss, 12×148mm thru-axle
Spokes	DT Swiss Champion
Tires	(F) Maxxis Minion DHF, 29×2.4" (27.5×2.4" - XS), 3C, EXO+, tubeless ready, (R) Maxxis Dissector, 29×2.4" (27.5×2.4" - XS), 3C, EXO+, tubeless ready
Pedals	Not included
Crank	SRAM X1-C Eagle DUB, 30T, 55mm chainline
Bottom Bracket	SRAM DUB BSA MTB73 Wide
Chain	SRAM GX Eagle
Rear Cogs	SRAM XG1275 Eagle 10-52
Rear Derailleur	SRAM GX Eagle
Shifters	SRAM GX Eagle
Handlebar	HollowGram SAVE riser bar, Carbon, 35mm clamp, 30mm rise, 8° sweep, 5° rise, 780mm
Grips	Fabric FunGuy
Stem	Cannondale 1, 7075 Alloy, 1-1/8", 35mm, 0°
Headset	Integrated Sealed Bearing, Tapered
Brakes	SRAM Code R hydraulic disc, 4-piston, CenterLine 200/200mm rotors
Brake Levers	SRAM Code R hydraulic disc
Saddle	Fabric Scoop Shallow Elite, cro-mo rails
Seatpost	Cannondale DownLow Dropper, internal routing, 31.6, 125mm (XS-S), 150mm (M), 170mm (L, XL)
Sizes	XS,SM,MD,LG,XL
Color 1	Chalk (CHK)
Extras	StrapRack tool/stuff holder

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Habit LT 2

Color 1 - Smoke Black

NEW INNOVATION

* Until further notice



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C23252U

Frame	Habit SmartForm C1 Alloy, 140mm travel, Proportional Response Suspension and Geo, 55mm chainline, ISCG05, BSA threaded BB, post mount brake, tapered headtube, DirectLine internal cable routing, UDH hanger
Fork	RockShox Lyrik Select, 150mm, DebonAir, 15×110mm thru-axle, tapered steered, 42mm offset
Rear Shock	RockShox Super Deluxe Select+, DebonAir, 2-Pos mode adjust, adjustable rebound
Rims	WTB ST i30 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle / (R) Shimano MT510, 12×148mm thru-axle
Spokes	DT Swiss Champion
Tires	(F) Maxxis Minion DHF, 29×2.5" (27.5×2.5" - XS), EXO, tubeless ready, (R) Maxxis Dissector, 29×2.5" (27.5×2.5" - XS), EXO, tubeless ready
Pedals	Not included
Crank	Shimano, FC-6120, 30T, 55mm chainline

Bottom Bracket	Shimano BSA 73
Chain	Shimano SLX, 12-speed
Rear Cogs	Shimano SLX, 10-51, 12-speed
Rear Derailleur	Shimano XT
Shifters	Shimano SLX, 12-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
Grips	Fabric FunGuy
Stem	Cannondale 3, 6061 Alloy, 31.8, 0°
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano SLX 4-piston disc, 203/180mm RT64 rotors
Brake Levers	Shimano SLX hydraulic disc
Saddle	Fabric Scoop Shallow Sport, steel rails
Seatpost	Cannondale DownLow Dropper, internal routing, 31.6, 125mm (XS-S), 150mm (M), 170mm (L, XL)
Sizes	XS,SM,MD,LG,XL
Color 1	Smoke Black (SBK)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Habit Carbon Ultimate

Color 1 - Gold Dust

NEW INNOVATION

* Until further notice



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C23012U

Frame	Habit Full Carbon, 130mm travel, Proportional Response Suspension and Geo, 55mm chainline, ISCG05, BSA threaded BB, post mount brake, tapered headtube, DirectLine internal cable routing, UDH hanger
Fork	RockShox Pike Ultimate, 140mm, DebonAir, 15×110mm thru-axle, tapered steered, 42mm offset
Rear Shock	RockShox Deluxe Ultimate, DebonAir, 2-Pos mode adjust, adjustable rebound
Rims	DT Swiss XMC 1501 Spline One, tubeless ready
Hubs	(F) DT Swiss 240, 15×110mm thru-axle / (R) DT Swiss 240 with Ratchet EXP 36, 12×148mm thru-axle
Spokes	DT Competition Race, straight pull
Tires	(F) Maxxis Dissector, 29×2.4" (27.5×2.4" - XS), 3C, EXO, tubeless ready, (R) Maxis Rekon, 29×2.4" (27.5×2.4" - XS), 3C, EXO, tubeless ready
Pedals	Not included
Crank	SRAM X1 Carbon Eagle DUB, 30T, 55mm chainline
Bottom Bracket	SRAM DUB BSA MTB73 Wide
Chain	SRAM X01 Eagle, 12-speed
Rear Cogs	SRAM XG-1295, X01 Eagle, 10-52, 12-speed
Rear Derailleur	SRAM X01 Eagle AXS
Shifters	SRAM Eagle AXS, 12-speed
Handlebar	HollowGram SAVE riser bar, Carbon, 35mm clamp, 30mm rise, 8° sweep, 5° rise, 780mm
Grips	Fabric FunGuy
Stem	Cannondale 1, 7075 Alloy, 1-1/8", 35mm, 0°
Headset	Integrated Sealed Bearing, Tapered
Brakes	SRAM G2 RSC hydraulic disc, 180/180mm CenterLine rotors
Brake Levers	SRAM G2 RSC hydraulic disc
Saddle	Fabric Scoop Shallow Elite, cro-mo rails
Seatpost	RockShox Reverb AXS, 31.6, 125mm (XS-S), 150mm (M-XL)
Sizes	XS,SM,MD,LG,XL
Color 1	Gold Dust (GDT)
Extras	StrapRack tool/stuff holder

Habit Carbon 1

Color 1 - Jade



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C23101U

Frame	Habit Full Carbon, 130mm travel, Proportional Response Suspension and Geo, 55mm chainline, ISCG05, BSA threaded BB, post mount brake, tapered headtube, DirectLine internal cable routing, UDH hanger
Fork	RockShox Pike Select+, 140mm, DebonAir, 15×110mm thru-axle, tapered steered, 42mm offset
Rims	Stan's NoTubes Arch MK4, 28h, tubeless ready
Hubs	(F) Formula 15×110mm thru-axle / (R) DT Swiss, 12×148mm thru-axle
Spokes	DT Swiss Champion
Tires	(F) Maxxis Dissector, 29×2.4" (27.5×2.4" - XS), 3C, EXO, tubeless ready, (R) Maxis Rekon, 29×2.4" (27.5×2.4" - XS), 3C, EXO, tubeless ready
Pedals	Not included
Crank	SRAM X1-C Eagle DUB, 30T, 55mm chainline
Bottom Bracket	SRAM DUB BSA MTB73 Wide
Chain	SRAM GX Eagle 12-speed
Rear Cogs	SRAM Eagle XG-1275, 10-52, 12-speed
Rear Derailleur	SRAM GX Eagle Lunar
Shifters	SRAM Eagle 12-speed
Handlebar	HollowGram SAVE riser bar, Carbon, 35mm clamp, 30mm rise, 8° sweep, 5° rise, 780mm
Grips	Fabric FunGuy
Stem	Cannondale 1, 7075 Alloy, 1-1/8", 35mm, 0°
Headset	Integrated Sealed Bearing, Tapered
Brakes	SRAM G2 R hydraulic disc, 180/180mm CenterLine rotors
Brake Levers	SRAM G2 R hydraulic disc
Saddle	Fabric Scoop Shallow Elite, cro-mo rails
Seatpost	Cannondale DownLow Dropper, internal routing, 31.6, 125mm (XS-S), 150mm (M-XL)
Sizes	XS,SM,MD,LG,XL
Color 1	Jade (JDE)
Extras	StrapRack tool/stuff holder

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Habit Carbon 2

Color 1 - Quicksand

Color 2 - Black Pearl



NEW INNOVATION

* Until further notice



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C23201U

Frame	Habit Full Carbon, 130mm travel, Proportional Response Suspension and Geo, 55mm chainline, ISCG05, BSA threaded BB, post mount brake, tapered headtube, DirectLine internal cable routing, UDH hanger
Fork	RockShox Pike Select, 140mm, DebonAir, 15×110mm thru-axle, tapered steered, 42mm offset
Rear Shock	RockShox Deluxe Select+, DebonAir, 2-Pos mode adjust, adjustable rebound
Rims	Stan's NoTubes Crest Arch MK4, 28h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle / (R) Shimano MT510, 12×148mm thru-axle
Spokes	DT Swiss Champion
Tires	(F) Maxxis Dissector, 29×2.4" (27.5×2.4" - XS), 3C, EXO, tubeless ready, (R) Maxis Rekon, 29×2.4" (27.5×2.4" - XS), 3C, EXO, tubeless ready
Pedals	Not included
Crank	Shimano, FC-6120, 30T, 55mm chainline

Bottom Bracket	Shimano BSA 73
Chain	Shimano SLX, 12-speed
Rear Cogs	Shimano SLX, 10-51, 12-speed
Rear Derailleur	Shimano XT
Shifters	Shimano SLX, 12-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
Grips	Fabric FunGuy
Stem	Cannondale 3, 6061 Alloy, 31.8, 0°
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano Deore 6120 4-piston hydraulic disc, 180/180mm RT64 rotors
Brake Levers	Shimano Deore hydraulic disc
Saddle	Fabric Scoop Shallow Sport, steel rails
Seatpost	Cannondale DownLow Dropper, internal routing, 31.6, 125mm (XS-S), 150mm (M-XL)
Sizes	XS,SM,MD,LG,XL
Color 1	Quicksand (QSD)
Color 2	Black Pearl (BPL)
Extras	StrapRack tool/stuff holder

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Habit 3

Color 1 - Purple Haze

Color 2 - Grey



NEW INNOVATION

* Until further notice



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C23301U

Frame	Habit SmartForm C1 Alloy, 130mm travel, Proportional Response Suspension and Geo, 55mm chainline, ISCG05, BSA threaded BB, post mount brake, tapered headtube, DirectLine internal cable routing, UDH hanger
Fork	RockShox Pike Select, 140mm, DebonAir, 15×110mm thru-axle, tapered steered, 42mm offset
Rear Shock	RockShox Deluxe Select+, DebonAir, 2-Pos mode adjust, adjustable rebound
Rims	Stan's NoTubes Crest D, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle / (R) Shimano MT410, 12×148mm thru-axle
Spokes	Stainless Steel, 14g
Tires	(F) Maxxis Dissector, 29×2.4" (27.5×2.4" - XS), EXO, tubeless ready, (R) Maxis Rekon, 29×2.4" (27.5×2.4" - XS), EXO, tubeless ready
Pedals	Not included
Crank	SRAM NX Eagle DUB, 30T, 55mm chainline
Bottom Bracket	SRAM DUB BSA MTB73 Wide
Chain	SRAM SX Eagle, 12-speed
Rear Cogs	SRAM NX Eagle, 10-50, 12-speed
Rear Derailleur	SRAM NX Eagle
Shifters	SRAM NX Eagle, 12-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
Grips	Fabric FunGuy
Stem	Cannondale 3, 6061 Alloy, 31.8, 0°
Headset	Integrated Sealed Bearing, Tapered
Brakes	SRAM G2 R hydraulic disc, 180/180mm CenterLine rotors
Brake Levers	SRAM G2 R hydraulic disc
Saddle	Fabric Scoop Shallow Sport, steel rails
Seatpost	TranzX dropper, internal routing, 31.6, 130mm (XS-S), 150 (M-XL)
Sizes	XS,SM,MD,LG,XL
Color 1	Purple Haze (PRH)
Color 2	Grey (GRY)

Habit 4

Color 1 - Candy Red

Color 2 - Black





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C23401U

Frame	Habit SmartForm C1 Alloy, 130mm travel, Proportional Response Suspension and Geo, 55mm chainline, ISCG05, BSA threaded BB, post mount brake, tapered headtube, DirectLine internal cable routing, UDH hanger
Fork	RockShox Recon RL, 140mm, Solo Air, 15×110mm thru-axle, tapered steerer, 42mm offset
Rear Shock	RockShox Deluxe Select, DebonAir, adjustable rebound
Rims	WTB STX i25 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle / (R) Shimano MT410, 12×148mm thru-axle
Spokes	Stainless Steel, 14g
Tires	Maxis Rekon, 29×2.4" (27.5×2.4" - XS), EXO, tubeless ready
Pedals	Not included
Crank	Shimano, FC-5121, 30T, 55mm chainline
Bottom Bracket	Shimano BSA 73
Chain	KMC X11, 11-speed
Rear Cogs	Shimano Deore M5100, 11-51, 11-speed
Rear Derailleur	Shimano Deore M5100
Shifters	Shimano Deore M5100, 11-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
Grips	Cannondale Locking Grips
Stem	Cannondale 3, 6061 Alloy, 31.8, 0°
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano MT200 hydraulic disc, 180/180mm RT30 rotors
Brake Levers	Shimano MT200 hydraulic disc
Saddle	Cannondale Ergo XC
Seatpost	TranzX dropper, internal routing, 31.6, 130mm (XS-S), 150mm (M-XL)
Sizes	XS,SM,MD,LG,XL
Color 1	Candy Red (CRD)
Color 2	Black (BLK)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Habit HT 1

Color 1 - Mercury

Color 2 - Cinnamon



NEW INNOVATION

* Until further notice



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C26102U

Frame	Habit HT, SmartForm C2 Alloy, tapered headtube, post mount disc, StraightShot internal cable routing, dropper post compatible, BSA 73, 12mm thru axle, Boost 148, 55mm chainline, UDH hanger.
Fork	RockShox 35 Silver, 130mm, Solo Air, 15×110mm thru-axle, tapered steerer, 42mm offset
Rims	WTB ST i30 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle / (R) Shimano MT410, 12×148mm thru-axle
Spokes	Stainless Steel, 14g
Tires	(F) WTB Vigilante, 29×2.5", tubeless ready, (R) WTB Vigilante, 29×2.4", tubeless ready
Pedals	Not included
Crank	Shimano, FC-5121, 30T, 55mm chainline
Bottom Bracket	Shimano BSA 73
Chain	Shimano Deore 6100, 12-speed
Rear Cogs	Shimano Deore M6100, 10-51, 12-speed
Rear Derailleur	Shimano Deore 6100
Shifters	Shimano Deore M6100, 12-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
Grips	Fabric FunGuy
Stem	Cannondale 3, 6061 Alloy, 31.8, 0°
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano MT420 4-piston hydraulic disc, 180/180mm RT30 rotors
Brake Levers	Shimano MT400 hydraulic disc
Saddle	Cannondale Ergo XC
Seatpost	Cannondale DownLow Dropper, internal routing, 31.6, 125mm (S), 150mm (M), 170mm (L-XL)
Sizes	SM,MD,LG,XL
Color 1	Mercury (MRC)
Color 2	Cinnamon (CIN)

Habit HT 2

Color 1 - Black Cherry

Color 2 - Mantis





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C26202U

Frame	Habit HT, SmartForm C2 Alloy, tapered headtube, post mount disc, StraightShot internal cable routing, dropper post compatible, BSA 73, 12mm thru axle, Boost 148, 55mm chainline, UDH hanger
Fork	RockShox Judy TK, 130mm, Solo Air, 15×110mm thru-axle, tapered steerer, 42mm offset
Rims	WTB STX i30 TCS, 32h, tubeless ready
Hubs	(F) Formula alloy, 15×110mm thru-axle / (R) Formula alloy 12×148mm thru-axle
Spokes	Stainless Steel, 14g
Tires	(F) WTB Vigilante, 29 × 2.5", tubeless ready, (R) WTB Vigilante, 29 × 2.4", tubeless ready
Pedals	Not included
Crank	Prowheel, 30T, 55mm chainline
Bottom Bracket	ProWheel BSA 73
Chain	KMC X10, 10-speed
Rear Cogs	microSHIFT, 11-48T, 10-speed
Rear Derailleur	microSHIFT Advent X
Shifters	microSHIFT Advent X, 10-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
Grips	Fabric FunGuy
Stem	Cannondale 3, 6061 Alloy, 31.8, 0°
Headset	Integrated Sealed Bearing, Tapered
Brakes	SRAM Level hydraulic Disc 180/180mm CenterLine Rotors
Brake Levers	SRAM Level hydraulic disc
Saddle	Cannondale Ergo XC
Seatpost	TranzX dropper, internal routing, 31.6, 100mm (S), 120mm (M), 130mm (L-XL)
Sizes	SM,MD,LG,XL
Color 1	Black Cherry (BCH)
Color 2	Mantis (MAT)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Habit HT 3

Color 1 - Jade

Color 2 - Black Pearl



NEW INNOVATION

* Until further notice



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C26302U

Frame	Habit HT, SmartForm C2 Alloy, tapered headtube, post mount disc, StraightShot internal cable routing, dropper post compatible, BSA 73, 12mm thru axle, Boost 148, 55mm chainline, UDH hanger.
Fork	SR Suntour XCR LO Boost 29, 140mm travel, 15mm thru axle, tapered alloy steerer
Rims	WTB STX i25 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle / (R) Shimano MT400, 12×148mm thru-axle
Spokes	Stainless Steel, 14g
Tires	WTB Breakout, 29 × 2.3", Comp
Pedals	Not included
Crank	Prowheel, 30T, 55mm chainline
Bottom Bracket	ProWheel BSA 73
Chain	KMC X10, 10-speed
Rear Cogs	microSHIFT Advent X, 11-48, 10-speed

Rear Derailleur	microSHIFT Advent X
Shifters	microSHIFT Advent X, 10-Speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
Grips	Cannondale Locking Grips
Stem	Cannondale 3, 6061 Alloy, 31.8, 0°
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano MT200 hydraulic disc, 180/180mm RT10 rotors
Brake Levers	Shimano MT200 hydraulic disc
Saddle	Cannondale Ergo XC
Seatpost	TranzX dropper, internal routing, 31.6, 100mm (S), 120mm (M), 130mm (L-XL)
Sizes	SM,MD,LG,XL
Color 1	Jade (JDE)
Color 2	Black Pearl (BPL)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Scalpel Carbon SE Ultimate

Color 1 - Jade



Specifications

C24302M

Frame	Scalpel SE Carbon, 120mm travel, Proportional Response Tuned, FlexPivot Chainstay, PF30-83, Tapered Headtube, Speed Release 12mm thru axle, 55mm chainline, Stash compatible
Fork	Lefty Ocho 120 Carbon, 120mm, Chamber Damper with remote lockout, OppO Spring System, tapered steerer, 50mm offset
Rear Shock	RockShox SIDLuxe Ultimate, 2-Pos mode adjust, adjustable rebound
Rims	HollowGram 25, Superlight Hi-Impact Carbon, 28h, 25mm IW, tubeless ready
Hubs	(F) HollowGram Lefty 60 / (R) HollowGram w/ DT Swiss Star Ratchet internals, 12×148mm
Spokes	DT Swiss Competition Race, straight-pull
Tires	(F) Maxxis Ardent Race, 29 × 2.35", EXO Protection, tubeless ready, (R) Maxxis Recon Race, 29 × 2.35", EXO Protection, tubeless ready
Pedals	Not included
Crank	SRAM X1 Carbon Eagle, 34T, 55mm chainline
Bottom Bracket	SRAM DUB PF30 MTB83
Chain	SRAM GX Eagle, 12-speed
Rear Cogs	SRAM XG-1295, X01 Eagle, 10-52, 12-speed
Rear Derailleur	SRAM X01 Eagle AXS
Shifters	SRAM Eagle AXS, 12-speed
Handlebar	Cannondale 1 Riser, Carbon, 31.8mm, 9° sweep, 4° rise, 780mm
Grips	Cannondale XC Silicone
Stem	Cannondale 1, 7075 Alloy, 1-1/8", 31.8, 7°
Headset	Integrated Sealed Bearing, Tapered
Brakes	SRAM Level TLM hydraulic disc, 160/160mm CenterLine rotors
Brake Levers	SRAM Level TLM hydraulic disc
Saddle	Fabric Scoop Flat Race, hollow titanium rails
Seatpost	Cannondale DownLow Dropper, internal routing, 31.6, 125mm (S), 150mm (M-XL)
Sizes	SM,MD,LG,XL
Color 1	Jade (JDE)
Extras	Stash Kit (Fabric 8-in-1 Mini Tool and Dynaplug tubeless puncture repair tool), Tubeless valve stems

Scalpel Carbon SE 1

Color 1 - Abyss Blue



Specifications

C24251M

Frame	Scalpel SE Carbon, 120mm travel, Proportional Response Tuned, FlexPivot Chainstay, PF30-83, Tapered Headtube, Speed Release 12mm thru axle, Ai offset, Stash compatible
Fork	RockShox SID Select+ RL, 120mm, Debonair, 15×110mm thru-axle, tapered steerer, 44mm offset
Rear Shock	RockShox SIDLuxe Select+, 2-Pos mode adjust, adjustable rebound
Rims	HollowGram 25, Superlight Hi-Impact Carbon, 28h, 25mm IW, tubeless ready
Hubs	(F) HollowGram, 15×110mm thru-axle / (R) HollowGram w/DT Swiss Star Ratchet internals, 12×148mm
Spokes	DT Swiss Competition Race, straight-pull
Tires	(F) Maxxis Ardent Race, 29 × 2.35", EXO Protection, tubeless ready, (R) Maxxis Recon Race, 29 × 2.25", EXO Protection, tubeless ready
Pedals	Not included
Crank	HollowGram, BB30a, OPI SpideRing, 32T, Ai offset
Bottom Bracket	Cannondale Alloy PressFit30
Chain	Shimano SLX, 12-speed
Rear Cogs	Shimano XT, 10-51, 12-speed
Rear Derailleur	Shimano XT
Shifters	Shimano XT, 12-speed
Handlebar	Cannondale 1 Riser, Carbon, 31.8mm, 9° sweep, 4° rise, 780mm
Grips	ESI Chunky Silicone, 32mm dia.
Stem	Cannondale 1, 7075 Alloy, 1-1/8", 31.8, 7°
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano XT hydraulic disc, 180/160mm XT rotors
Brake Levers	Shimano XT hydraulic disc
Saddle	Fabric Scoop Flat Elite, cro-mo rails
Seatpost	Cannondale DownLow Dropper, internal routing, 31.6, 100mm (S), 125mm (M-L), 150mm (XL)
Sizes	SM, MD, LG, XL
Color 1	Abyss Blue (ABB)
Extras	Stash Kit (Fabric 8-in-1 Mini Tool and Dynaplug tubeless puncture repair tool), Tubeless valve stems

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Scalpel Carbon SE 2

Color 1 - Mango

Color 2 - Black Magic





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C24852U

Frame	120mm travel, Carbon, Proportional Response Tuned, FlexPivot Chainstay, PF30-83, Tapered Headtube, Speed Release 12mm thru axle, Ai Offset, Stash compatible
Fork	RockShox SID, 120mm, Debonair, Rush 2 position damper, 15×110mm thru-axle, tapered steerer, 44mm offset
Rear Shock	RockShox SIDLuxe Select+, 2-Pos mode adjust, adjustable rebound, 190×45
Rims	Stan's NoTubes Crest D, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle / (R) Shimano MT410 12×148mm thru-axle
Spokes	DT Swiss Factory, 14g
Tires	(F) Maxxis Ardent Race, 29 × 2.35", EXO Protection, tubeless ready, (R) Maxxis Recon Race, 29 × 2.35", EXO Protection, tubeless ready
Pedals	Not included
Crank	Cannondale 1, BB30a, OPI SpideRing, 32T, Ai Offset
Bottom Bracket	Cannondale PF30 MTB

Chain	Shimano Deore 6100, 12-speed
Rear Cogs	Shimano Deore M6100, 10-51, 12-speed
Rear Derailleur	Shimano XT
Shifters	Shimano Deore M6100, 12-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 30mm rise, 8° sweep, 6° rise, 780mm
Grips	Fabric Funguy
Stem	Cannondale 3, 6061 Alloy, 31.8, 7°
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano MT501 hydraulic disc, 180/160mm RT64 rotors
Brake Levers	Shimano MT501 hydraulic disc
Saddle	Fabric Scoop Shallow Sport, steel rails
Seatpost	Cannondale DownLow Dropper, internal routing, 31.6, 100mm (S), 125mm (M-L), 150mm (XL)
Sizes	SM, MD, LG, XL
Color 1	Mango (MGO)
Color 2	Black Magic (BKM)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Trail SL 1

Color 1 - Stealth Grey



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C26152M

Frame	Trail SL, Smartform C2 Alloy, SAVE dropped seatstays, tapered headtube, post mount disc, StraightShot internal cable routing, dropper post compatible BSA 73, 12mm thru axle, Boost 148
Fork	RockShox, SID SL, 100mm, Remote Lockout
Rims	WTB STX i25 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle / (R) Shimano MT410, 12×148mm thru-axle
Spokes	Stainless Steel, 14g
Tires	(F) Schwalbe Racing Ray Performance, 29 x 2.25", Addix Compound, tubeless ready, (R) Schwalbe Racing Ralph Performance, 29 x 2.25", Addix Compound, tubeless ready
Pedals	Not included
Crank	Shimano, FC-5111, 30T, 52mm chainline
Bottom Bracket	Shimano BSA 73
Chain	Shimano Deore 6100, 12-speed
Rear Cogs	Shimano Deore M6100, 10-51, 12-speed
Rear Derailleur	Shimano XT
Shifters	Shimano Deore M6100, 12-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
Grips	Fabric FunGuy
Stem	Cannondale 3, 6061 Alloy, 31.8, 0°
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano Deore 6100 hydraulic disc, 160/160mm RT54 rotors
Brake Levers	Shimano Deore hydraulic disc
Saddle	Cannondale Ergo XC
Seatpost	TranzX dropper, internal routing, 31.6, 100mm (S), 120mm (M), 130mm (L-XL)
Sizes	SM, MD, LG, XL
Color 1	Stealth Grey (SGY)

Trail SL 2

Color 1 - Midnight Blue



Specifications

C26251M

Frame	Trail SL, Smartform C2 Alloy, SAVE dropped seatstays, tapered headtube, post mount disc, StraightShot internal cable routing, dropper post compatible BSA 73, 12mm thru axle, Boost 148
Fork	RockShox Judy Gold RL, 100mm, Solo Air, 15×110 thru-axle, remote lockout, tapered steerer, 51mm offset
Rims	WTB STX i23 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle / (R) Shimano MT410 12×148mm thru-axle
Spokes	Stainless Steel, 14g
Tires	Schwalbe Rocket Rick, 29 × 2.25"
Pedals	Cannondale Platform
Crank	Shimano M6100, 30T
Bottom Bracket	Shimano Hollowtech II
Chain	KMC X12, 12-speed
Rear Cogs	Shimano Deore M6100, 10-51, 12-speed
Rear Derailleur	Shimano SLX, 12-speed
Shifters	Shimano Deore M6100, 12-speed
Handlebar	FSA Alloy Riser, 15mm rise, 760mm
Grips	Cannondale Locking Grips
Stem	Cannondale 3 with Intellimount, Alloy, 31.8mm clamp
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano MT400 hydraulic disc, 180/160mm RT10 rotors
Brake Levers	Shimano MT400 hydraulic disc
Saddle	Cannondale Ergo XC
Seatpost	Cannondale 3, 6061 Alloy, 31.6 x 350mm (S), 400mm (M-XL)
Sizes	SM, MD, LG, XL
Color 1	Midnight Blue (MDN)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Trail Women's SL 3

Color 1 - Slate Gray



Specifications

C26151F

Frame	Trail SL, Smartform C2 Alloy, SAVE dropped seatstays, tapered headtube, post mount disc, StraightShot internal cable routing, dropper post compatible BSA 73, 12mm thru axle, Boost 148
Fork	RockShox Judy Silver TK, 100mm, Solo Air, 15×110 thru-axle, remote lockout, 51mm offset
Rims	WTB STX i23 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle / (R) Shimano MT400 12×148mm thru-axle
Spokes	Stainless Steel, 14g
Tires	Schwalbe Rocket Rick, 29 × 2.25"
Pedals	Cannondale Platform
Crank	Shimano M5100, 30T
Bottom Bracket	Shimano Hollowtech II
Chain	KMC X12, 12-speed
Rear Cogs	Sunrace, 11-51, 12-speed
Rear Derailleur	Shimano Deore M6100
Shifters	Shimano Deore M6100, 12-speed
Handlebar	FSA Alloy Riser, 15mm rise, 740mm
Grips	Cannondale Locking Grips
Stem	Cannondale 3 with Intellimount, Alloy, 31.8mm clamp
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano MT200 hydraulic disc, 160/160mm RT10 rotors
Brake Levers	Shimano MT200 hydraulic disc
Saddle	Cannondale Women's Trail, 170mm, steel rails
Seatpost	Cannondale 3, 6061 Alloy, 31.6 × 350mm (XS - SM), 400mm (MD-LG)
Sizes	XS, SM, MD, LG
Color 1	Slate Gray w/ Alpine Blue (SLT)

Trail SL 3

Color 1 - Black Pearl

Color 2 - Cannondale Green w/Jet Black





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C26351M

Frame	Trail SL, Smartform C2 Alloy, SAVE dropped seatstays, tapered headtube, post mount disc, StraightShot internal cable routing, dropper post compatible BSA 73, 12mm thru axle, Boost 148
Fork	RockShox Judy Silver TK, 100mm, Solo Air, 15×110 thru-axle, remote lockout, 51mm offset
Rims	WTB STX i23 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle / (R) Shimano MT400 12×148mm thru-axle
Spokes	Stainless Steel, 14g
Tires	Schwalbe Rocket Rick, 29 × 2.25"
Pedals	Cannondale Platform
Crank	Shimano M5100, 30T
Bottom Bracket	Shimano Hollowtech II
Chain	KMC X12, 12-speed
Rear Cogs	Sunrace, 11-51, 12-speed
Rear Derailleur	Shimano Deore M6100
Shifters	Shimano Deore M6100, 12-speed
Handlebar	FSA Alloy Riser, 15mm rise, 760mm
Grips	Cannondale Locking Grips
Stem	Cannondale 3 with Intellimount, Alloy, 31.8mm clamp
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano MT200 hydraulic disc, 160/160mm RT10 rotors
Brake Levers	Shimano MT200 hydraulic disc
Saddle	Cannondale Ergo XC
Seatpost	Cannondale 3, 6061 Alloy, 31.6 × 350mm (XS - SM), 400mm (MD-XL))
Sizes	SM, MD, LG, XL
Color 1	Black Pearl (BPL)
Color 2	Cannondale Green w/Jet Black (GRN)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Trail SL 4

Color 1 - Charcoal Grey

Color 2 - Hazard Orange





Specifications

C26452M

Frame	Trail SL, Smartform C2 Alloy, SAVE dropped seatstays, tapered headtube, post mount disc, StraightShot internal cable routing, dropper post compatible BSA 73, 12mm thru axle, Boost 148
Fork	SR Suntour XCR LO Boost 29, 100mm travel, 15mm thru axle, tapered alloy steerer, Remote Lockout
Rims	WTB STX i23 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT200, QR / (R) Shimano MT400, 12×148mm thru-axle
Spokes	Stainless Steel, 14g
Tires	Schwalbe Rocket Rick, 29 × 2.25”
Pedals	Not included
Crank	Shimano, FC-5100, 30T, 52mm chainline
Bottom Bracket	Shimano BSA 73
Chain	Shimano Deore, 11-speed
Rear Cogs	Shimano Deore M5100, 11-51, 11-speed

Rear Derailleur	Shimano Deore M5100
Shifters	Shimano Deore M5100, 11-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
Grips	Cannondale Locking Grips
Stem	Cannondale 3, 6061 Alloy, 31.8, 0°
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano MT200 hydraulic disc, 160/160mm RT10 rotors
Brake Levers	Shimano MT200 hydraulic disc
Saddle	Cannondale Ergo XC
Seatpost	Cannondale 3, 6061 Alloy, 31.6 x 350mm (SM), 400mm (MD-XL)
Sizes	SM, MD, LG, XL
Color 1	Charcoal Grey (GRY)
Color 2	Hazard Orange (ORG)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Trail Women's 5

Color 1 - Fine Silver w/ Lavender

Color 2 - Black Pearl w/ Salmon Pink





Specifications

C26351F

Frame	SmartForm C3 Alloy, SAVE, 1-1/8" headtube, post mount disc, StraightShot internal cable routing, dropper post compatible, BSA-73
Fork	SR Suntour XCR32 RL, 100mm, remote lockout, coil, 42mm offset (27.5"), 46mm offset (29")
Rims	WTB SX19, 32h
Hubs	(F) Shimano HB-TX505, QR / (R) Shimano FH-TX505, QR
Spokes	Stainless Steel, 14g
Tires	Schwalbe Rocket Rick, 29×2.25" (27.5×2.25" - XS, SM), K-Guard
Pedals	Cannondale Platform
Crank	Shimano M4100, 36/26
Bottom Bracket	Sealed bearing cartridge, square taper
Chain	KMC X10, 10-speed
Rear Cogs	Sunrace, 11-42, 10-speed
Front Derailleur	Shimano Deore M4100, 34.9 clamp
Rear Derailleur	Shimano Deore M4100
Shifters	Shimano Deore M4100, 10-speed
Handlebar	Cannondale Riser, 6061 Alloy, 25mm rise, 8° sweep, 6° rise, 720mm
Grips	Cannondale Dual-Density
Stem	6061 Alloy, 31.8, 7°
Headset	Semi-Integrated, 1-1/8"
Brakes	Tektro M275 hydraulic disc, 160/160mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Stage 2 Women's
Seatpost	Cannondale 3, 6061 Alloy, 31.6 × 350mm (XS - SM), 400mm (MD-LG)
Sizes	XS, SM, MD, LG
Color 1	Fine Silver w/ Lavender (LAV)
Color 2	Black Pearl w/ Salmon Pink (BPL)

Trail 5

Color 1 - Jet Black w/ Graphite

Color 2 - Mango w/ Butter Yellow





Specifications

C26551M

Frame	SmartForm C3 Alloy, SAVE, 1-1/8" headtube, post mount disc, StraightShot internal cable routing, dropper post compatible, BSA-73
Fork	SR Suntour XCR32 RL, 100mm, remote lockout, coil, 42mm offset (27.5") 46mm offset (29")
Rims	WTB SX19, 32h
Hubs	(F) Shimano HB-TX505, QR / (R) Shimano FH-TX505, QR
Spokes	Stainless Steel, 14g
Tires	Schwalbe Rocket Rick, 29×2.25" (27.5×2.25" - XS, SM), K-Guard
Pedals	Cannondale Platform
Crank	Shimano M4100, 36/26
Bottom Bracket	Sealed bearing cartridge, square taper
Chain	KMC X10, 10-speed
Rear Cogs	Sunrace, 11-42, 10-speed
Front Derailleur	Shimano Deore M4100, 34.9 clamp
Rear Derailleur	Shimano Deore M4100
Shifters	Shimano Deore M4100, 10-speed
Handlebar	Cannondale Riser, 6061 Alloy, 25mm rise, 8° sweep, 6° rise, 720mm
Grips	Cannondale Dual-Density
Stem	6061 Alloy, 31.8, 7°
Headset	Semi-Integrated, 1-1/8"
Brakes	Tektro M275 hydraulic disc, 160/160mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Stage 3
Seatpost	Cannondale 3, 6061 Alloy, 31.6 × 350mm (XS - SM), 400mm (MD-XL)
Sizes	XS, SM, MD, LG, XL
Color 1	Jet Black w/ Graphite (GRA)
Color 2	Mango w/ Butter Yellow (MGO)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Trail Women's 6

Color 1 - Laguna Yellow



Specifications

C26451F

Frame	SmartForm C3 Alloy, SAVE, 1-1/8" headtube, post mount disc, StraightShot internal cable routing, dropper post compatible, BSA-73
Fork	SR Suntour XCM-RL, 100mm, lockout, coil, 42mm offset (27.5") 46mm offset (29")
Rims	WTB SX19, 32h
Hubs	(F) Shimano HB-TX505, QR / (R) Shimano FH-TX505, QR
Spokes	Stainless Steel, 14g
Tires	Schwalbe Rocket Rick, 29×2.25" (27.5×2.25" - XS, SM), K-Guard
Pedals	Cannondale Platform
Crank	Shimano MT210, 36/22
Bottom Bracket	Sealed bearing cartridge, square taper
Chain	KMC X9, 9-speed
Rear Cogs	Shimano HG200, 11-36, 9-speed
Front Derailleur	Shimano Altus, 34.9 clamp
Rear Derailleur	Shimano Alivio, Shadow SGS
Shifters	Shimano Alivio, 9-speed
Handlebar	Cannondale Riser, 6061 Alloy, 25mm rise, 8° sweep, 6° rise, 720mm
Grips	Cannondale Dual-Density
Stem	6061 Alloy, 31.8, 7°
Headset	Semi-Integrated, 1-1/8"
Brakes	Tektro M275 hydraulic disc, 160/160mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Stage 2 Women's
Seatpost	Cannondale 3, 6061 Alloy, 31.6 × 350mm (XS - SM), 400mm (MD-LG)
Sizes	XS, SM, MD, LG
Color 1	Laguna Yellow (LYW)

Trail 6

Color 1 - Slate

Color 2 - Abyss Blue





Specifications

C26651M

Frame	SmartForm C3 Alloy, SAVE, 1-1/8" headtube, post mount disc, StraightShot internal cable routing, dropper post compatible, BSA-73
Fork	SR Suntour XCM-RL, 100mm, lockout, coil, 42mm offset (27.5") 46mm offset (29")
Rims	WTB SX19, 32h
Hubs	(F) Shimano HB-TX505, QR / (R) Shimano FH-TX505, QR
Spokes	Stainless Steel, 14g
Tires	Schwalbe Rocket Rick, 29×2.25" (27.5×2.25" - XS, SM), K-Guard
Pedals	Cannondale Platform
Crank	Shimano MT210, 36/22
Bottom Bracket	Sealed bearing cartridge, square taper
Chain	KMC X9, 9-speed
Rear Cogs	Shimano HG200, 11-36, 9-speed
Front Derailleur	Shimano Altus, 34.9 clamp
Rear Derailleur	Shimano Alivio, Shadow SGS
Shifters	Shimano Alivio, 9-speed
Handlebar	Cannondale Riser, 6061 Alloy, 25mm rise, 8° sweep, 6° rise, 720mm
Grips	Cannondale Dual-Density
Stem	6061 Alloy, 31.8, 7°
Headset	Semi-Integrated, 1-1/8"
Brakes	Tektro M275 hydraulic disc, 160/160mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Stage 3
Seatpost	Cannondale 3, 6061 Alloy, 31.6 × 350mm (XS - SM), 400mm (MD-XL)
Sizes	XS, SM, MD, LG, XL
Color 1	Slate (SLT)
Color 2	Abyss Blue (ABB)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Trail Women's 7

Color 1 - Chalk



Specifications

C26551F

Frame	SmartForm C3 Alloy, SAVE, 1-1/8" headtube, post mount disc, StraightShot internal cable routing, dropper post compatible, BSA-73
Fork	SR Suntour XCT DS, 100mm, coil, 42mm offset (27.5") 46mm offset (29")
Rims	WTB SX19, 32h
Hubs	(F) Shimano HB-TX505, QR / (R) Shimano FH-TX505, QR
Spokes	Stainless Steel, 14g
Tires	Schwalbe Rocket Rick, 29×2.25" (27.5×2.25" - XS, SM), K-Guard
Pedals	Cannondale Platform
Crank	Prowheel, 36/22
Bottom Bracket	Sealed bearing cartridge, square taper
Chain	KMC Z9, 9-speed
Rear Cogs	Sunrace, 11-34, 9-speed
Front Derailleur	microSHIFT Dual Pull Compact, Band Clamp
Rear Derailleur	microSHIFT M46L
Shifters	microSHIFT, 9-speed
Handlebar	6061 Alloy Riser, 31.8mm, 25mm rise, 700mm
Grips	Cannondale Dual-Density
Stem	6061 Alloy, 31.8, 8°
Headset	Semi-Integrated, 1-1/8"
Brakes	Tektro M275 hydraulic disc, 160/160mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Stage 2 Women's
Seatpost	Cannondale 3, 6061 Alloy, 31.6 × 350mm (XS - SM), 400mm (MD-LG)
Sizes	XS, SM, MD, LG
Color 1	Chalk (CHK)

Trail 7

Color 1 - Jet Black w/ Charcoal Gray

Color 2 - Rally Red w/ Stealth Gray





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C26751M

Frame	SmartForm C3 Alloy, SAVE, 1-1/8" headtube, post mount disc, StraightShot internal cable routing, dropper post compatible, BSA-73
Fork	SR Suntour XCT DS, 100mm, coil, 42mm offset (27.5") 46mm offset (29")
Rims	WTB SX19, 32h
Hubs	(F) Shimano HB-TX505, QR / (R) Shimano FH-TX505, QR
Spokes	Stainless Steel, 14g
Tires	Schwalbe Rocket Rick, 29×2.25" (27.5×2.25" - XS, SM), K-Guard
Pedals	Cannondale Platform
Crank	Prowheel, 36/22
Bottom Bracket	Sealed bearing cartridge, square taper
Chain	KMC Z9, 9-speed
Rear Cogs	Sunrace, 11-34, 9-speed
Front Derailleur	microSHIFT Dual Pull Compact, Band Clamp
Rear Derailleur	microSHIFT M46L
Shifters	microSHIFT, 9-speed
Handlebar	6061 Alloy Riser, 31.8mm, 25mm rise, 700mm
Grips	Cannondale Dual-Density
Stem	6061 Alloy, 31.8, 8°
Headset	Semi-Integrated, 1-1/8"
Brakes	Tektro M275 hydraulic disc, 160/160mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Stage 3
Seatpost	Cannondale 3, 6061 Alloy, 31.6 × 350mm (XS - SM), 400mm (MD-XL)
Sizes	XS, SM, MD, LG, XL
Color 1	Jet Black w/ Charcoal Gray (BLK)
Color 2	Rally Red w/ Stealth Gray (RRD)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Trail Women's 8

Color 1 - Midnight Blue

Color 2 - Sage Gray





Specifications

C26651F

Frame	SmartForm C3 Alloy, SAVE, 1-1/8" headtube, post mount disc, StraightShot internal cable routing, dropper post compatible, BSA-73
Fork	SR Suntour XCE28, 100mm, coil, 42mm offset (27.5") 46mm offset (29")
Rims	WTB SX19, 32h
Hubs	(F) Shimano HB-TX505, QR / (R) Shimano FH-TX505, QR
Spokes	Stainless Steel, 14g
Tires	Schwalbe Rocket Rick, 29×2.25" (27.5×2.25" - XS, SM), K-Guard
Pedals	Cannondale Platform
Crank	Prowheel, 36/22
Bottom Bracket	Sealed bearing cartridge, square taper
Chain	KMC X8, 8-speed
Rear Cogs	Sunrace, 12-32, 8-speed

Front Derailleur	microSHIFT Dual Pull Compact, Band Clamp
Rear Derailleur	microSHIFT M36L
Shifters	microSHIFT, 8-speed
Handlebar	6061 Alloy Riser, 31.8mm, 25mm rise, 700mm
Grips	Cannondale Dual-Density
Stem	6061 Alloy, 31.8, 8°
Headset	Semi-Integrated, 1-1/8"
Brakes	Tektro M275 hydraulic disc, 160/160mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Stage 2 Women's
Seatpost	Cannondale 3, 6061 Alloy, 31.6 × 350mm (XS - SM), 400mm (MD-LG)
Sizes	XS, SM, MD, LG
Color 1	Midnight Blue (TRQ)
Color 2	Sage Gray (SGG)

Trail 8

Color 1 - Grey

Color 2 - Quicksand w/ Acid Lime





Specifications

C26851M

Frame	SmartForm C3 Alloy, SAVE, 1-1/8" headtube, post mount disc, StraightShot internal cable routing, dropper post compatible, BSA-73
Fork	SR Suntour XCE28, 100mm, coil, 42mm offset (27.5") 46mm offset (29")
Rims	WTB SX19, 32h
Hubs	(F) Shimano HB-TX505, QR / (R) Shimano FH-TX505, QR
Spokes	Stainless Steel, 14g
Tires	Schwalbe Rocket Rick, 29×2.25" (27.5×2.25" - XS, SM), K-Guard
Pedals	Cannondale Platform
Crank	Prowheel, 36/22
Bottom Bracket	Sealed bearing cartridge, square taper
Chain	KMC X8, 8-speed
Rear Cogs	Sunrace, 12-32, 8-speed

Front Derailleur	microSHIFT Dual Pull Compact, Band Clamp
Rear Derailleur	microSHIFT M36L
Shifters	microSHIFT, 8-speed
Handlebar	6061 Alloy Riser, 31.8mm, 25mm rise, 700mm
Grips	Cannondale Dual-Density
Stem	6061 Alloy, 31.8, 8°
Headset	Semi-Integrated, 1-1/8"
Brakes	Tektro M275 hydraulic disc, 160/160mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Stage 3
Seatpost	Cannondale 3, 6061 Alloy, 31.6 × 350mm (XS - SM), 400mm (MD-XL)
Sizes	XS, SM, MD, LG, XL
Color 1	Grey (GRY)
Color 2	Quicksand w/ Acid Lime (QSD)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Dave

Color 1 - Stealth Grey



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C29101U

Frame	C3 Alloy, Threaded BB, Disc Brake Mount, Integrated 1-1/8"-1.5" Tapered Headtube, 3/8" Dropout w/ Integrated Chain Tensioners
Fork	Manitou Circus Expert, Air w/ Rebound Adjust, 100mm, 20mm thru-axle, 1-1/8"-1-1/2" tapered steerer, preload adjuster, black stanchions
Rims	Alloy, double wall, 32h
Hubs	(F) Formula 20×110mm thru-axle / (R) Sealed bearing cassette, 3/8×17mm female bolt
Spokes	Stainless steel, 14g
Tires	Maxxis DTH 26 × 2.3"
Pedals	Low profile alloy with grippy pins, boron axle
Crank	Tubular Cr-Mo 3pc., 170mm Arms, Cold Forged CR-MO 22mm x 8T Spline Spindle, 28T

Bottom Bracket	BMX Euro Type w/ Solid Spindle
Chain	KMC HL1 Wide
Rear Cogs	Sunrace 13T
Handlebar	Cannondale 3 Riser, 6061 Alloy, 30mm rise, 8° sweep, 6° rise, 780mm
Grips	Fabric Funguy
Stem	Cannondale 3, 6061 Alloy, 31.8, 0°
Headset	Integrated Sealed Bearing, Tapered
Brakes	Tektro mechanical disc, 160/160mm rotors
Brake Levers	Tektro 2 finger
Saddle	Fabric Magic Steel, steel rails
Seatpost	Cannondale 3, 6061 Alloy, 27.2 × 200mm
Sizes	One Size
Color 1	Stealth Grey (SGY)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Scalpel Hi-MOD 1

Color 1 - Cashmere White w/ Jet Black Splatter



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C24202M

Frame	Scalpel Hi-Mod Carbon, 100mm travel, Proportional Response Tuned, FlexPivot Chainstay, PF30-83, Tapered Headtube, Speed Release 12mm thru axle, 55mm chainline, Stash compatible
Fork	Lefty Ocho Carbon, 100mm, Chamber Damper with remote lockout, OppO Spring System, tapered steerer, 55mm offset
Rear Shock	Fox Float DPS Performance Elite EVOL, remote lockout, adjustable rebound
Rims	HollowGram 25, Superlight Hi-Impact Carbon, 28h, 25mm IW, tubeless ready
Hubs	(F) HollowGram Lefty 60 / (R) HollowGram w/ DT Swiss Star Ratchet internals, 12×148mm
Spokes	DT Swiss Competition Race, straight-pull
Tires	(F) Schwalbe Racing Ray EVO, 29 × 2.25", SnakeSkin, Addix Speedgrip, tubeless ready, (R) Schwalbe Racing Ralph EVO, 29 × 2.25", SnakeSkin, Addix Speed, tubeless ready
Pedals	Not included
Crank	SRAM X1 Carbon Eagle, 34T, 55mm chainline

Bottom Bracket	SRAM DUB PF30 MTB83
Chain	SRAM GX Eagle, 12-speed
Rear Cogs	SRAM XG-1295, X01 Eagle, 10-52, 12-speed
Rear Derailleur	SRAM X01 Eagle AXS
Shifters	SRAM Eagle AXS, 12-speed
Handlebar	Cannondale 1 Flat, Carbon, 31.8mm, 9° back, 760mm
Grips	Cannondale XC Silicone
Stem	Cannondale 1, 7075 Alloy, 1-1/8", 31.8, 7°
Headset	Integrated Sealed Bearing, Tapered
Brakes	SRAM Level TLM hydraulic disc, 160/160mm CenterLine rotors
Brake Levers	SRAM Level TLM hydraulic disc
Saddle	Prologo Dimension NDR, Tirox rails
Seatpost	Cannondale 1, UD Carbon, 31.6 × 400mm
Sizes	SM,MD,LG,XL
Color 1	Cashmere White w/ Jet Black Splatter (WHT)
Extras	Stash Kit (Fabric 8-in-1 Mini Tool and Dynaplug tubeless puncture repair tool), Tubeless valve stems

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Scalpel Carbon 2

Color 1 - Raw Carbon w/ Graphite

Color 2 - Stealth Gray

Color 3 - Sonic Blue



Photos not available yet



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C24301M

Frame	Scalpel Carbon, 100mm travel, Proportional Response Tuned, FlexPivot Chainstay, PF30-83, Tapered Headtube, Speed Release 12mm thru axle, Ai Offset, Stash compatible
Fork	Lefty Ocho, 100mm, Chamber Damper with remote lockout, OppO Spring System, tapered steerer, 55mm offset
Rear Shock	Fox Float DPS Performance Elite EVOL, remote lockout, adjustable rebound
Rims	HollowGram 25, Superlight Hi-Impact Carbon, 28h, 25mm IW, tubeless ready
Hubs	(F) HollowGram Lefty 60 / (R) HollowGram w/ DT Swiss Star Ratchet internals, 12×148mm
Spokes	HollowGram, 2.0/1.8/2.0, straight-pull
Tires	(F) Schwalbe Racing Ray EVO, 29 × 2.25", SnakeSkin, Addix Speedgrip, tubeless ready, (R) Schwalbe Racing Ralph EVO, 29 × 2.25", SnakeSkin, Addix Speed, tubeless ready
Pedals	Not included
Crank	HollowGram, BB30a, OPI SpideRing, 34T, Ai offset
Bottom Bracket	Cannondale Alloy PressFit30
Chain	Shimano XT, 12-speed
Rear Cogs	Shimano XT, 10-51, 12-speed
Rear Derailleur	Shimano XT
Shifters	Shimano XT, 12-speed
Handlebar	Cannondale 2 Flat, butted 2014 Alloy, 31.8mm, 3° rise, 8° sweep, 760mm
Grips	ESI Chunky Silicone, 32mm dia.
Stem	Cannondale 1, 7075 Alloy, 1-1/8", 31.8, 7°
Headset	Integrated, 1-1/8 to 1.5", sealed angular contact bearings
Brakes	Shimano XT hydraulic disc, 160/160mm XT rotors
Brake Levers	Shimano XT hydraulic disc
Saddle	Prologo Dimension NDR, STN rails
Seatpost	Cannondale 2, 7075 Alloy, 31.6 × 400mm
Sizes	SM, MD, LG, XL
Color 1	Raw Carbon w/ Graphite (GRA)
Color 2	SGY (Stealth Gray)
Color 3	SNB (Sonic Blue)
Extras	Stash Kit (Fabric 8-in-1 Mini Tool and Dynaplug tubeless puncture repair tool), Tubeless valve stems

Scalpel Carbon 3

Color 1 - Candy Red

Color 2 - Mercury w/ Jet Black





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C24401M

Frame	Scalpel Carbon, 100mm travel, Proportional Response Tuned, FlexPivot Chainstay, PF30-83, Tapered Headtube, Speed Release 12mm thru axle, Ai Offset, Stash compatible
Fork	Lefty Ocho, 100mm, Chamber Damper with remote lockout, OppO Spring System, tapered steerer, 55mm offset
Rear Shock	Fox Float DPS Performance Elite EVOL, remote lockout, adjustable rebound
Rims	Stan's NoTubes Crest S1, 28h, tubeless ready
Hubs	(F) HollowGram Lefty 60 / (R) Shimano MT510 12×148mm thru-axle
Spokes	DT Swiss Champion
Tires	(F) Schwalbe Racing Ray Performance, 29 x 2.25", Addix Compound, tubeless ready, (R) Schwalbe Racing Ralph Performance, 29 x 2.25", Addix Compound, tubeless ready
Pedals	Not included
Crank	HollowGram, BB30a, OPI SpideRing, 34T, Ai offset
Bottom Bracket	Cannondale Alloy PressFit30
Chain	Shimano SLX, 12-speed
Rear Cogs	Shimano SLX, 10-51, 12-speed
Rear Derailleur	Shimano XT
Shifters	Shimano SLX, 12-speed
Handlebar	Cannondale 2 Flat, butted 2014 Alloy, 31.8mm, 3° rise, 8° sweep, 760mm
Grips	ESI Chunky Silicone, 32mm dia.
Stem	Cannondale 3, 6061 Alloy, 31.8, 7°
Headset	Integrated, 1-1/8 to 1.5", sealed angular contact bearings
Brakes	Shimano Deore hydraulic disc, 160/160mm RT54 rotors
Brake Levers	Shimano Deore hydraulic disc
Saddle	Prologo Dimension NRD, STN rails
Seatpost	Cannondale 2, 7075 Alloy, 31.6 × 400mm
Sizes	SM, MD, LG, XL
Color 1	Candy Red (CRD)
Color 2	Mercury w/ Jet Black (BLK)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Scalpel Carbon 4

Color 1 - Candy Green



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C24402M

Frame	Scalpel Carbon, 100mm travel, Proportional Response Tuned, FlexPivot Chainstay, PF30-83, Tapered Headtube, Speed Release 12mm thru axle, Ai Offset, Stash compatible
Fork	Fox Float Performance 32 SC, 100mm, 15×110mm thru-axle, tapered steerer, 51mm offset, remote-actuated
Rear Shock	Fox Float DPS Performance Elite EVOL, remote lockout, adjustable rebound
Rims	WTB STX i23 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle / (R) Shimano MT410, 12×148mm thru-axle
Spokes	DT Swiss Champion
Tires	(F) Maxxis Ardent Race, 29 × 2.2", EXO Protection, tubeless ready, (R) Maxxis Recon Race, 29 × 2.2", EXO Protection, tubeless ready
Pedals	Not included
Crank	Cannondale 1, BB30a, OPI SpideRing, 32T, Ai Offset

Bottom Bracket	Cannondale Alloy PressFit30
Chain	Shimano Deore 6100, 12-speed
Rear Cogs	Shimano Deore M6100, 10-51, 12-speed
Rear Derailleur	Shimano XT
Shifters	Shimano Deore M6100, 12-speed
Handlebar	Cannondale 2 Flat, butted 2014 Alloy, 31.8mm, 3° rise, 8° sweep, 760mm
Grips	Cannondale Locking Grips
Stem	Cannondale 2, 6061 Alloy, 35mm, 0°
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano Deore 6100 hydraulic disc, 160/160mm RT54 rotors
Brake Levers	Shimano Deore hydraulic disc
Saddle	Fabric Scoop Shallow Sport, steel rails
Seatpost	Cannondale 2, 7075 Alloy, 31.6 × 400mm
Sizes	SM,MD,LG,XL
Color 1	Jungle Green (JNG)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Scalpel HT Hi-MOD 1

Color 1 - Black Tint Carbon

Color 2 - Cashmere White w/ Jet Black Splatter





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C25201U

Frame	Scalpel HT Hi-MOD Carbon, Proportional Response Design, PF30-83, tapered head tube, 55mm chainline, Speed Release 12mm thru axle w/UDH hanger
Fork	Lefty Ocho 120 Carbon, 110mm, Chamber Damper with remote lockout, OppO Spring System, tapered steerer, 50mm offset
Rims	HollowGram 25, Superlight Hi-Impact Carbon, 28h, 25mm IW, tubeless ready
Hubs	(F) HollowGram Lefty 60 / (R) HollowGram w/ DT Swiss Star Ratchet internals, 12×148mm
Spokes	DT Swiss Competition Race, straight-pull
Tires	(F) Schwalbe Racing Ray EVO, 29 × 2.25", SnakeSkin, Addix Speedgrip, tubeless ready, (R) Schwalbe Racing Ralph EVO, 29 × 2.25", SnakeSkin, Addix Speed, tubeless ready
Pedals	Not Included
Crank	HollowGram, BB30 83MTB, OPI SpideRing, 34T, 55mm chainline
Bottom Bracket	Cannondale Alloy PressFit30

Chain	Shimano XT, 12-speed
Rear Cogs	Shimano XT, 10-51, 12-speed
Rear Derailleur	Shimano XTR
Shifters	Shimano XT, 12-speed
Handlebar	Cannondale 1 Flat, Carbon, 31.8mm, 9° back, 760mm
Grips	Cannondale XC Silicone
Stem	Cannondale 1, 7075 Alloy, 1-1/8", 31.8, 7°
Headset	Integrated, 1-1/8 to 1.5", sealed angular contact bearings
Brakes	Shimano XT hydraulic disc, 180/160mm XT rotors
Brake Levers	Shimano XT hydraulic disc
Saddle	Prologo Dimension NDR, Tirox rails
Seatpost	Cannondale C1 Carbon, 27.2×400mm
Sizes	SM, MD, LG, XL
Color 1	Black Tint Carbon (CRB)
Color 2	Cashmere White w/ Jet Black Splatter (WHT)
Extras	Tubeless Valves

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Scalpel HT Carbon 2

Color 1 - Candy Red

Color 2 - Purple Haze





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C25231U

Frame	Scalpel HT Carbon, Proportional Response Design, PF30-83, tapered head tube, 55mm chainline, Speed Release 12mm thru axle w/UDH hanger
Fork	Lefty Ocho, 100mm, Chamber Damper with remote lockout, OppO Spring System, tapered steerer, 55mm offset
Rims	Stan's NoTubes Crest MK4, 28h, tubeless ready
Hubs	(F) HollowGram Lefty 60 / (R) Shimano7110, 12×148mm thru-axle
Spokes	DT Swiss Competition
Tires	(F) Schwalbe Racing Ray EVO, 29 × 2.25", SnakeSkin, Addix Speedgrip, tubeless ready, (R) Schwalbe Racing Ralph EVO, 29 × 2.25", SnakeSkin, Addix Speed, tubeless ready
Pedals	Not Included
Crank	HollowGram, BB30 83MTB, OPI SpideRing, 34T, 55mm chainline
Bottom Bracket	Cannondale Alloy PressFit30
Chain	Shimano SLX, 12-speed
Rear Cogs	Shimano XT, 10-51, 12-speed
Rear Derailleur	Shimano XT
Shifters	Shimano XT, 12-speed
Handlebar	Cannondale 1 Flat, Carbon, 31.8mm, 9° back, 760mm
Grips	Cannondale XC Silicone
Stem	Cannondale 3, 6061 Alloy, 31.8, 7°
Headset	Integrated, 1-1/8 to 1.5", sealed angular contact bearings
Brakes	Shimano XT hydraulic disc, 160/160mm XT rotors
Brake Levers	Shimano XT hydraulic disc
Saddle	Prologo Dimension NDR, Tirox rails
Seatpost	Cannondale C1 Carbon, 27.2×400mm
Sizes	SM, MD, LG, XL
Color 1	Candy Red (CRD)
Color 2	Purple Haze (PRH)

Scalpel HT Carbon 3

Color 1 - Black Pearl

Color 2 - Highlighter





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C25301U

Frame	Scalpel HT Carbon, Proportional Response Design, PF30-83, tapered head tube, 55mm chainline, Speed Release 12mm thru axle w/UDH hanger
Fork	RockShox SID SL Select+ RL, 100mm, Debonair, remote lockout, 15×110mm thru-axle, tapered steerer, 44mm offset
Rims	Stan's NoTubes Crest MK4, 28h, tubeless ready
Hubs	(F) Shimano MT410, 15×110mm thru-axle / (R) Shimano MT510, 12×148mm thru-axle
Spokes	DT Swiss Competition
Tires	(F) Schwalbe Racing Ray EVO, 29 × 2.25", Twinskin, tubeless ready, (R) Schwalbe Racing Ralph EVO, 29 × 2.25", SnakeSkin, Addix compound, tubeless ready
Pedals	Not Included
Crank	Cannondale 1, BB30 83MTB, OPI SpideRing, 34T, 55mm chainline
Bottom Bracket	Cannondale Alloy PressFit30
Chain	Shimano SLX, 12-speed
Rear Cogs	Shimano SLX, 10-51, 12-speed
Rear Derailleur	Shimano XT
Shifters	Shimano SLX, 12-speed
Handlebar	Cannondale 2 Flat, butted 2014 Alloy, 31.8mm, 3° rise, 8° sweep, 760mm
Grips	Cannondale XC Silicone
Stem	Cannondale 2, 6061 Alloy, 31.8, 7°
Headset	Integrated, 1-1/8 to 1.5", sealed angular contact bearings
Brakes	Shimano M6100 hydraulic disc, 160/160mm RT64 rotors
Brake Levers	Shimano M6100 hydraulic disc
Saddle	Fabric Scoop Shallow Elite, hollow cro-mo rails
Seatpost	C2 Carbon, 27.2×400mm
Sizes	SM, MD, LG, XL
Color 1	Black Pearl (BLK)
Color 2	Highlighter (HLT)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Scalpel HT Carbon 4

Color 1 - Acid Red

Color 2 - Black Pearl





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C25401U


Frame	Scalpel HT Carbon, Proportional Response Design, PF30-83, tapered head tube, 55mm chainline, Speed Release 12mm thru axle w/UDH hanger
Fork	RockShox SID SL , 100mm, Debonair, remote lockout, 15×110mm thru-axle, tapered steerer, 44mm offset
Rims	WTB STX i23, 32h, tubeless ready
Hubs	(F) Shimano MT410, 15×110mm thru-axle / (R) Shimano MT410, 12×148mm thru-axle
Spokes	DT Swiss Champion 2.0
Tires	(F) Schwalbe Racing Ray EVO, 29 × 2.25", Twinskin, tubeless ready, (R) Schwalbe Racing Ralph EVO, 29 × 2.25", SnakeSkin, Addix compound, tubeless ready
Pedals	Not Included
Crank	Shimano M5121, 30T, 55mm chainline
Bottom Bracket	Cannondale Alloy PressFit 30 - 24mm

Chain	Shimano Deore, 12-speed
Rear Cogs	Shimano Deore M6100, 10-51, 12-speed
Rear Derailleur	Shimano XT
Shifters	Shimano Deore M6100, 12-speed
Handlebar	Cannondale 2 Flat, butted 2014 Alloy, 31.8mm, 3° rise, 8° sweep, 760mm
Grips	Fabric Funguy
Stem	Cannondale 2, 6061 Alloy, 31.8, 7°
Headset	Integrated, 1-1/8 to 1.5", sealed angular contact bearings
Brakes	Shimano MT501 hydraulic disc, 160/160mm RT54 rotors
Brake Levers	Shimano MT500 hydraulic disc
Saddle	Fabric Scoop Shallow Sport, steel rails
Seatpost	C3 Alloy, 27.2×400mm
Sizes	SM, MD, LG, XL
Color 1	Acid Red (ARD)
Color 2	Black Pearl (BPL)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022


Jekyll

	SM(29")	MD(29")	LG(29")	XL(29")
A **Seat Tube Length (cm)**	39.0	41.0	44.5	50.0
B **Top Tube Horizontal (cm)**	56.9	60.8	62.3	66.0
C **Top Tube Actual (cm)**	54.1	56.9	58.8	62.7
D **Head Tube Angle**	64.0°	64.0°	64.0°	64.0°
E **Seat Tube Angle Effective**	77.5°	77.5°	77.5°	77.5°
F **Standover (cm)**	75.0	75.0	76.0	77.0
G **Head Tube Length (cm)**	10.0	11.0	12.0	13.0
H **Wheelbase (cm)**	119.3	122.7	126.4	131.1
I **Front Center (cm)**	76.5	79.4	82.3	86.3
J **Chain Stay Length (cm)**	43.0	43.5	44.2	45.0
K **Bottom Bracket Drop (cm)**	3.0	3.0	3.0	3.0
L **Bottom Bracket Height (cm)**	34.8	34.8	34.8	34.8
M **Fork Rake (cm)**	4.4	4.4	4.4	4.4
N **Trail (cm)**	13.5	13.5	13.5	13.5
O **Stack (cm)**	62.5	63.4	64.3	65.2
P **Reach (cm)**	42.5	45.0	47.5	51.0

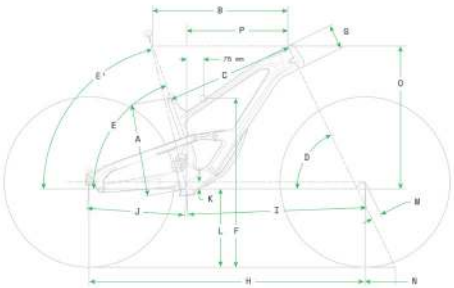

Habit

	SM	MD	LG	XL
A **Seat Tube Length (cm)**	340	44	48	52
B **Top Tube Horizontal (cm)**	57.3	60.6	63.9	67.1
C **Top Tube Actual (cm)**	51.0	54.3	57.9	61.7
D **Head Tube Angle**	66.0°	66.0°	66.0°	66.0°
E **Seat Tube Angle**	66.3°	66.3°	66.3°	66.3°
E¹ **Seat Tube Angle Effective**	74.5°	74.5°	74.5°	74.5°
F **Standover (cm)**	72	75	77	78
G **Head Tube Length (cm)**	10.5	11.5	12.5	13.5
H **Wheelbase (cm)**	114.2	117.6	121	124.4
I **Front Center (cm)**	71.0	74.3	77.8	81.1
J **Chain Stay Length (cm)**	43.5	43.5	43.5	43.5
K **Bottom Bracket Drop (cm)**	3.8	3.8	3.8	3.8
L **Bottom Bracket Height (cm)**	33.9	33.9	33.9	33.9
M **Fork Rake (cm)**	5.1	5.1	5.1	5.1
N **Trail (cm)**	11.2	11.2	11.2	11.2
O **Stack (cm)**	60.7	61.6	62.5	63.4
P **Reach (cm)**	40.0	43.0	46.0	49.0

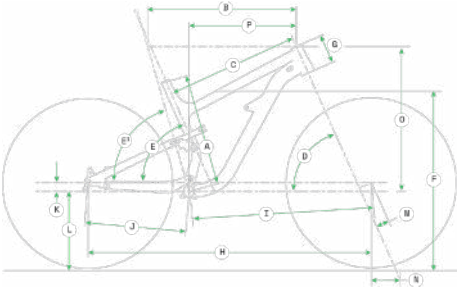


Habit HT

	SM	MD	LG	XL
A **Seat Tube Length (cm)**	340	44	48	52
B **Top Tube Horizontal (cm)**	57.3	60.6	63.9	67.1
C **Top Tube Actual (cm)**	51.0	54.3	57.9	61.7
D **Head Tube Angle**	66.0°	66.0°	66.0°	66.0°
E **Seat Tube Angle**	66.3°	66.3°	66.3°	66.3°
E¹ **Seat Tube Angle Effective**	74.5°	74.5°	74.5°	74.5°
F **Standover (cm)**	72	75	77	78
G **Head Tube Length (cm)**	10.5	11.5	12.5	13.5
H **Wheelbase (cm)**	114.2	117.6	121	124.4
I **Front Center (cm)**	71.0	74.3	77.8	81.1
J **Chain Stay Length (cm)**	43.5	43.5	43.5	43.5
K **Bottom Bracket Drop (cm)**	3.8	3.8	3.8	3.8
L **Bottom Bracket Height (cm)**	33.9	33.9	33.9	33.9
M **Fork Rake (cm)**	5.1	5.1	5.1	5.1
N **Trail (cm)**	11.2	11.2	11.2	11.2
O **Stack (cm)**	60.7	61.6	62.5	63.4
P **Reach (cm)**	40.0	43.0	46.0	49.0

GEO TO FOLLOW


Scalpel Carbon

	SM	MD	LG	XL
A **Seat Tube Length (cm)**	43	44	48	52
B **Top Tube Horizontal (cm)**	57.6	59.9	62.2	64.4
C **Top Tube Actual (cm)**	53.1	55.3	57.7	60.3
D **Head Tube Angle**	68°	68°	68°	68°
E **Seat Tube Angle**	N/A	N/A	N/A	N/A
E¹ **Seat Tube Angle Effective**	74.5°	74.5°	74.5°	74.5°
F **Standover (cm)**	74.3	74.5	74.5	74.8
G **Head Tube Length (cm)**	9.5	10.5	11.5	12.5
H **Wheelbase (cm)**	112.8	115.1	117.5	119.9
I **Front Center (cm)**	69.5	71.8	74.2	76.6
J **Chain Stay Length (cm)**	43.6	43.6	43.6	43.6
K **Bottom Bracket Drop (cm)**	4	4	4	4
L **Bottom Bracket Height (cm)**	33.1	33.1	33.1	33.1
M **Fork Rake (cm)**	5.5	5.5	5.5	5.5
N **Trail (cm)**	9	9	9	9
O **Stack (cm)**	58.2	59.1	60.1	61
P **Reach (cm)**	41.5	43.5	45.5	47.5

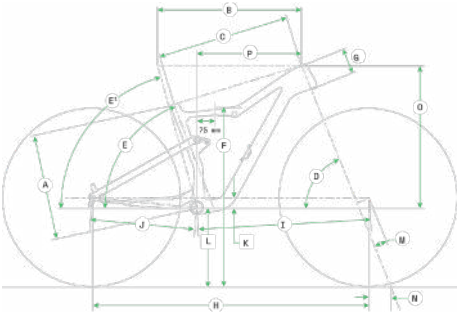


Scalpel SE

	SM	MD	LG	XL
A **Seat Tube Length (cm)**	43	44	48	52
B **Top Tube Horizontal (cm)**	58	60.2	62.5	64.8
C **Top Tube Actual (cm)**	53.1	55.3	57.7	60.3
D **Head Tube Angle**	67°	67°	67°	67°
E **Seat Tube Angle**	N/A	N/A	N/A	N/A
E¹ **Seat Tube Angle Effective**	74°	74°	74°	74°
F **Standover (cm)**	75.5	75.7	75.8	76
G **Head Tube Length (cm)**	9.5	10.5	11.5	12.5
H **Wheelbase (cm)**	112.5	114.8	117.2	119.6
I **Front Center (cm)**	69	71.4	73.8	76.2
J **Chain Stay Length (cm)**	43.6	43.6	43.6	43.6
K **Bottom Bracket Drop (cm)**	3.2	3.2	3.3	3.3
L **Bottom Bracket Height (cm)**	34.4	34.4	34.4	34.4
M **Fork Rake (cm)**	4.4	4.4	4.4	4.4
N **Trail (cm)**	11.2	11.2	11.2	11.2
O **Stack (cm)**	59.2	60.2	61.1	62.1
P **Reach (cm)**	41	43	45	47

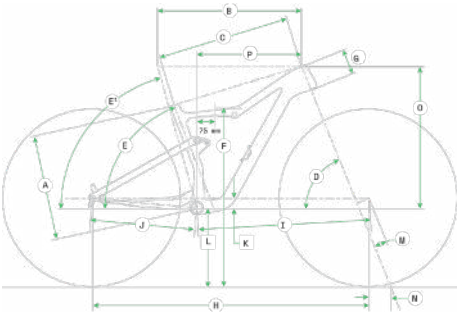


Scalpel HT 100

	SM (29")	MD (29")	LG (29")	XL (29")
A **Seat Tube Length (cm)**	39.0	44.0	48.0	53.0
B **Top Tube Horizontal (cm)**	57.1	59.4	61.7	64.0
C **Head Tube Angle**	67.0°	67.0°	67.0°	67.0°
D **Seat Tube Angle**	73.2°	74°	74.6°	75°
D¹ **Seat Tube Angle Effective**	75°	75°	75°	75°
E **Standover (cm)**	74.8	78.5	81.4	85.0
F **Head Tube Length (cm)**	9.9	11.0	12.2	13.5
G **Wheelbase (cm)**	112.4	115.4	118.3	121.4
H **Front Center (cm)**	70.2	72.6	75.0	77.6
I **Chain Stay Length (cm)**	43.0	43.5	44.0	44.5
J **Bottom Bracket Drop (cm)**	6.2	6.2	6.2	6.2
K **Bottom Bracket Height (cm)**	31.5	31.5	31.5	31.5
L **Fork Rake (cm)**	5.5	5.5	5.5	5.5
M **Trail (cm)**	10.0	10.0	10.0	10.0
N **Stack (cm)**	60.2	61.2	62.3	63.5
O **Reach (cm)**	41.0	43.0	45.0	47.0

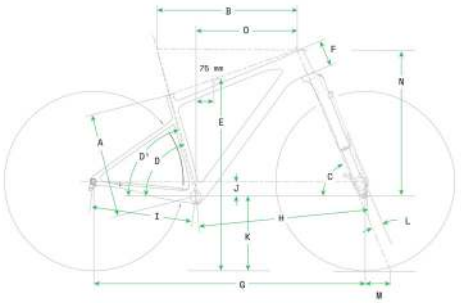


Scalpel HT 110

	SM (29")	MD (29")	LG (29")	XL (29")
A **Seat Tube Length (cm)**	39.0	44.0	48.0	53.0
B **Top Tube Horizontal (cm)**	57.2	59.4	61.7	64.2
C **Head Tube Angle**	66.5°	66.5°	66.5°	66.5°
D **Seat Tube Angle**	72.7°	73.5°	74.1°	74.6°
D¹ **Seat Tube Angle Effective**	74.5°	74.5°	74.6°	74.6°
E **Standover (cm)**	75.4	79.0	81.9	85.5
F **Head Tube Length (cm)**	9.9	11.0	12.2	13.5
G **Wheelbase (cm)**	112.3	115.1	118.1	121.2
H **Front Center (cm)**	69.9	72.3	74.8	77.4
I **Chain Stay Length (cm)**	43.0	43.5	44.0	44.5
J **Bottom Bracket Drop (cm)**	5.9	5.9	5.9	5.9
K **Bottom Bracket Height (cm)**	31.8	31.8	31.8	31.8
L **Fork Rake (cm)**	5.5	5.5	5.5	5.5
M **Trail (cm)**	10.9	10.9	10.9	10.9
N **Stack (cm)**	60.7	61.7	62.9	64.1
O **Reach (cm)**	40.4	42.3	44.4	46.5

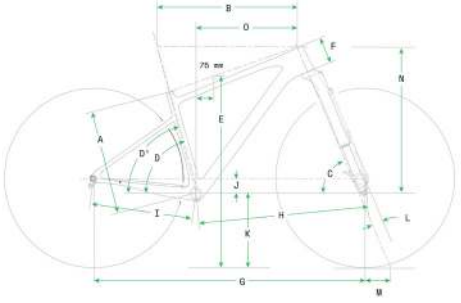


Trail SE

	SM(29")	MD(29")	LG(29")	XL(29")
A **Seat Tube Length (cm)**	39	44	47	52
B **Top Tube Horizontal (cm)**	56.4	59.3	62.4	65.1
C **Top Tube Actual (cm)**	55	57.4	59.8	62.5
D **Head Tube Angle**	67°	67°	67°	67°
E **Seat Tube Angle Effective**	74°	74°	74°	74°
F **Standover (cm)**	75	78.5	80.9	84.5
G **Head Tube Length (cm)**	9	10	11	12
H **Wheelbase (cm)**	109	112.3	115.2	118
I **Front Center (cm)**	67.2	70.5	73.5	76.2
J **Chain Stay Length (cm)**	43.5	43.5	43.5	43.5
K **Bottom Bracket Drop (cm)**	6.5	6.5	6.5	6.5
L **Bottom Bracket Height (cm)**	32	32	32	32
M **Fork Rake (cm)**	5.1	5.1	5.1	5.1
N **Trail (cm)**	10.3	10.3	10.3	10.3
O **Stack (cm)**	60.7	61.8	61.7	63.7
P **Reach (cm)**	38.4	41.4	44	46.5

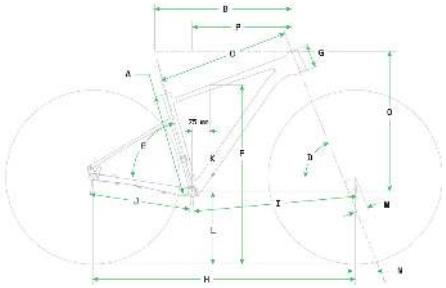


Trail SL

	XS(29")	SM(29")	MD(29")	LG(29")	XL(29")
A **Seat Tube Length (cm)**	36	39	44	47	52
B **Top Tube Horizontal (cm)**	53.7	56.1	59.3	62.1	64.8
C **Top Tube Actual (cm)**	53.3	55	57.4	59.8	62.5
D **Head Tube Angle**	68°	68°	68°	68°	68°
E **Seat Tube Angle Effective**	74.5°	74.5°	74.5°	74.5°	74.5°
F **Standover (cm)**	71.6	73.9	77.4	79.6	83.2
G **Head Tube Length (cm)**	9	9	10	11	12
H **Wheelbase (cm)**	106.4	109	112.3	115.2	118
I **Front Center (cm)**	63.7	66.3	69.6	72.5	75.3
J **Chain Stay Length (cm)**	43.5	43.5	43.5	43.5	43.5
K **Bottom Bracket Drop (cm)**	6.5	6.5	6.5	6.5	6.5
L **Bottom Bracket Height (cm)**	31.1	31.1	31.1	31.1	31.1
M **Fork Rake (cm)**	5.1	5.1	5.1	5.1	5.1
N **Trail (cm)**	9.7	9.7	9.7	9.7	9.7
O **Stack (cm)**	58.4	59.8	60.8	61.7	62.6
P **Reach (cm)**	36.9	38.9	41.9	44.4	46.9

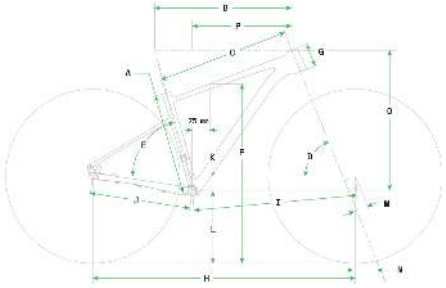


Trail

	XS(27.5")	SM(27.5")	MD(29")	LG(29")	XL(29")
A **Seat Tube Length (cm)**	34.5	40.0	44.0	48.0	52.0
B **Top Tube Horizontal (cm)**	54.5	58.5	61.0	63.5	66.0
C **Top Tube Actual (cm)**	52.3	56.1	58.7	60.9	63.4
D **Head Tube Angle**	68.0°	68.0°	68.5°	68.5°	68.5°
E **Seat Tube Angle**	73.5°	73.5°	73.5°	73.5°	73.5°
F **Standover (cm)**	71.0	74.6	79.5	82.0	85.0
G **Head Tube Length (cm)**	9.5	10.5	11.5	12.5	13.5
H **Wheelbase (cm)**	106.7	110.8	114.0	116.6	119.2
I **Front Center (cm)**	63.4	67.5	70.3	72.9	75.4
J **Chain Stay Length (cm)**	44.0	44.0	44.5	44.5	44.5
K **Bottom Bracket Drop (cm)**	6.0	6.0	6.5	6.5	6.5
L **Bottom Bracket Height (cm)**	30.4	30.4	30.8	30.8	30.8
M **Fork Rake (cm)**	4.2	4.2	5.1	5.1	5.1
N **Trail (cm)**	10.2	10.2	9.2	9.2	9.2
O **Stack (cm)**	60.7	61.6	62.4	63.3	64.3
P **Reach (cm)**	36.5	40.2	42.5	44.7	47.0

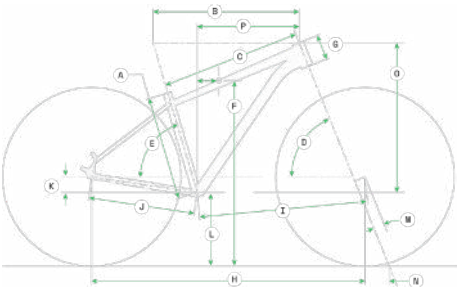

Dave

	One size
Wheel size	26"
A **Seat Tube Length (cm)**	33.4
B **Top Tube Horizontal (cm)**	58.7
C **Top Tube Actual (cm)**	58.2
D **Head Tube Angle**	68.5°
E **Seat Tube Angle Effective**	75.6°
F **Standover (cm)**	69.3
G **Head Tube Length (cm)**	11
H **Wheelbase (cm)**	107.9
I **Front Center (cm)**	70.2
J **Chain Stay Length (cm)**	37.8
K **Bottom Bracket Drop (cm)**	2.5
L **Bottom Bracket Height (cm)**	31.9
M **Fork Rake (cm)**	4.1
N **Trail (cm)**	9.1
O **Stack (cm)**	58.8
P **Reach (cm)**	43.6

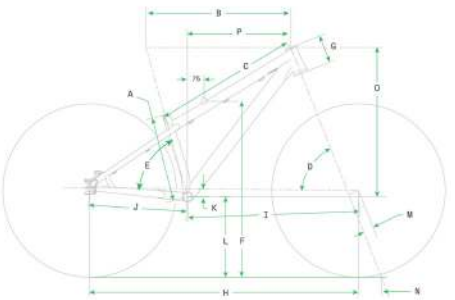


Active
URBAN
FITNESS

Active

Fitness


Adventure


Quick


Quick CX


Treadwell

Urban


Bad Boy

Adventure EQ

Color 1 - Candy Red

Color 2 - Gray





Specifications

C32101U

Frame	SmartForm C3 Alloy, SAVE, low-step thru, tapered head tube, Straightshot hidden cable routing, disc brakes, rack/fender mounts
Fork	Suntour NEX-E25, 50mm travel, coil, custom crown, 1 1/8" steerer
Rims	Cannondale Disc, double wall w/eyelet, 32h
Hubs	(F) Shimano Dynamo DH-3D37, QR / (R) Formula CL-1422, QR
Spokes	Stainless steel, 14g
Tires	Goodyear Transit Tour, 27.5 × 2.0"
Pedals	Reinforced folding nylon pedals
Crank	Prowheel, 38T
Bottom Bracket	Cartridge, square taper
Chain	KMC X8, 8-speed
Rear Cogs	microSHIFT, 12-42, 8-speed
Rear Derailleur	microSHIFT Acolyte
Shifters	microSHIFT Acolyte, 8-speed
Handlebar	Cannondale Riser, 6061 Alloy, 60mm rise, 15° back, 685mm
Grips	Cannondale Dual-Density
Stem	90 degree rotatable, 31.8, 7°
Headset	Semi-Integrated, Tapered, 1-1/2"-1-1/8"
Brakes	Tektro M275 hydraulic disc, 160/160mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Ergo Comfort
Seatpost	Suspension, 27.2 × 300mm
Sizes	SM, MD, LG
Color 1	Candy Red (CRD)
Color 2	Gray (GRY)
Extras	Alloy Fenders, Rear Rack, Spanninga Front and Rear Dynamo Lights, Kickstand (dropout mounted)

Adventure 1

Color 1 - Cool Mint



Specifications

C32201U

Frame	SmartForm C3 Alloy, SAVE, low-step thru, tapered head tube, Straightshot hidden cable routing, disc brakes, rack/fender mounts
Fork	Suntour NEX-E25, 50mm travel, coil, custom crown, 1 1/8" steerer
Rims	Cannondale Disc, double wall w/eyelet, 32h
Hubs	(F) Formula DC-1420, QR / (R) Formula DC-1422, QR
Spokes	Stainless steel, 14g
Tires	Goodyear Transit Tour, 27.5 × 2.0"
Pedals	Cannondale Comfort
Crank	Prowheel, 38T
Bottom Bracket	Cartridge, square taper
Chain	KMC X8, 8-speed
Rear Cogs	microSHIFT, 12-42, 8-speed
Rear Derailleur	microSHIFT Acolyte
Shifters	microSHIFT Acolyte, 8-speed
Handlebar	Cannondale Riser, 6061 Alloy, 60mm rise, 15° back, 685mm
Grips	Cannondale Dual-Density
Stem	Promax A-headset Adjustable, 31.8
Headset	Semi-Integrated, Tapered, 1-1/2"-1-1/8"
Brakes	Tektro M275 hydraulic disc, 160/160mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Ergo Comfort
Seatpost	Suspension, 27.2 × 300mm
Sizes	SM, MD, LG
Color 1	Cool Mint (CMT)
Extras	Kickstand (dropout mounted)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Adventure 2

Color 1 - Abyss



Specifications

C32301U

Frame	SmartForm C3 Alloy, SAVE, low-step thru, tapered head tube, Straightshot hidden cable routing, disc brakes, rack/fender mounts
Fork	Suntour NEX-E25, 50mm travel, coil, custom crown, 1 1/8" steerer
Rims	Cannondale Disc, double wall w/eyelet, 32h
Hubs	(F) Formula DC-1420, QR / (R) Formula DC-27A, QR
Spokes	Stainless steel, 14g
Tires	Goodyear Transit Tour, 27.5 × 2.0"
Pedals	Cannondale Comfort
Crank	Prowheel, 38T
Bottom Bracket	Cartridge, square taper
Chain	KMC Z7, 7-speed
Rear Cogs	Sunrace, 11-34, 7-speed

Rear Derailleur	microSHIFT M26S
Shifters	microSHIFT MS25, 7-speed
Handlebar	Cannondale Riser, 6061 Alloy, 60mm rise, 15° back, 685mm
Grips	Cannondale Dual-Density
Stem	6061 Alloy, 31.8, 8°
Headset	Semi-Integrated, Tapered, 1-1/2"-1-1/8"
Brakes	Tektro Mechanical Disc, 160/160mm rotors
Brake Levers	Tektro 4 finger
Saddle	Cannondale Ergo Comfort
Seatpost	Alloy, 27.2 × 350mm
Sizes	SM, MD, LG
Color 1	Abyss (ABB)
Extras	Kickstand

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Quick 1

Color 1 - Black Pearl



Specifications

C31100M

Frame	SmartForm C3 Alloy, SAVE, tapered head tube, Straightshot hidden cable routing, flat mount disc, rack/fender mounts, 360° reflectivity
Fork	Full carbon, 12×100mm thru-axle, 1-1/4" to 1-1/8" tapered steerer, flat mount disc, fender mounts, 360° reflectivity
Rims	Cannondale Disc, double wall w/eyelet, 32h
Hubs	(F) Formula CRX-512, 12×100mm / (R) Formula CX-22, QR
Spokes	Stainless Steel, 14g
Tires	Schwalbe Lugano, 700 × 32c, K-Guard, reflective strip
Pedals	Cannondale Fitness Reinforced Composite
Crank	FSA Omega ME Alloy, 50/34
Bottom Bracket	FSA MegaExo
Chain	Shimano HG601, 11-speed
Rear Cogs	Shimano 105, 11-32, 11-speed
Front Derailleur	Shimano 105, 31.8 clamp
Rear Derailleur	Shimano 105 GS
Shifters	Shimano RS700 FB, 11-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 18mm rise, 8° back, 4° up, 6mm
Grips	Cannondale Ergo Fitness Dual Density, Lock-on
Stem	Cannondale 3 with Intellimount, Alloy, 31.8mm clamp
Headset	FSA Sealed Bearing, integrated, 1-1/4"-1-1/8"
Brakes	Shimano MT201-UR300 hydraulic disc, 160/160mm RT56 rotors
Brake Levers	Shimano MT201
Saddle	Cannondale Fitness Ergo Double Density
Seatpost	Cannondale 3, 6061 Alloy, 27.2 × 350mm
Sizes	SM, MD, LG, XL, 2XL
Color 1	Black Pearl (BPL)

Quick 2

Color 1 - Abyss



Specifications

C31200M

Frame	SmartForm C3 Alloy, SAVE, tapered head tube, Straightshot hidden cable routing, flat mount disc, rack/fender mounts, 360° reflectivity
Fork	Full carbon, 12×100mm thru-axle, 1-1/4" to 1-1/8" tapered steerer, flat mount disc, fender mounts, 360° reflectivity
Rims	Cannondale Disc, double wall w/eyelet, 32h
Hubs	(F) Formula CRX-512, 12×100mm / (R) Formula DC-1422, QR
Spokes	Stainless Steel, 14g
Tires	Schwalbe Lugano, 700 × 32c, K-Guard, reflective strip
Pedals	Cannondale Fitness Reinforced Composite
Crank	FSA Tempo, 50/34
Bottom Bracket	Cartridge, square taper
Chain	KMC Z9, 9-speed
Rear Cogs	Shimano HG200, 11-34, 9-speed
Front Derailleur	Shimano Sora, 31.8 clamp
Rear Derailleur	Shimano Sora GS
Shifters	Shimano Sora, 9-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 18mm rise, 8° back, 4° up, 6mm
Grips	Cannondale Ergo Fitness Dual Density, Lock-on
Stem	Cannondale 3 with Intellimount, Alloy, 31.8mm clamp
Headset	FSA Sealed Bearing, integrated, 1-1/4"-1-1/8"
Brakes	Tektro HD-R280 hydraulic disc, 160/140mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Fitness Ergo Double Density
Seatpost	Cannondale 3, 6061 Alloy, 27.2 × 350mm
Sizes	SM, MD, LG, XL, 2XL
Color 1	Abyss (ABB)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Quick 3

Color 1 - Black Pearl



Specifications

C31300M

Frame	SmartForm C3 Alloy, SAVE, tapered head tube, Straightshot hidden cable routing, flat mount disc, rack/fender mounts, 360° reflectivity
Fork	Full carbon, 12×100mm thru-axle, 1-1/4" to 1-1/8" tapered steerer, flat mount disc, fender mounts, 360° reflectivity
Rims	Cannondale Disc, double wall w/eyelet, 32h
Hubs	(F) Formula CRX-512, 12×100mm / (R) Formula DC-1422, QR
Spokes	Stainless Steel, 14g
Tires	Schwalbe Spicer, 700 × 35c, K-Guard, reflective strip
Pedals	Cannondale Fitness Reinforced Composite
Crank	Prowheel, 48/32
Bottom Bracket	Cartridge, square taper
Chain	KMC Z9, 9-speed
Rear Cogs	Sunrace, 11-34, 9-speed

Front Derailleur	Shimano Acera, 31.8 clamp
Rear Derailleur	Shimano Altus
Shifters	Shimano Altus, 9-speed
Handlebar	6061 Alloy Double-butted, 25mm rise, 8° sweep, 6° rise, 640mm
Grips	Cannondale Ergo Fitness Dual Density, Lock-On
Stem	Cannondale 3 with Intellimount, Alloy, 31.8mm clamp
Headset	FSA Sealed Bearing, integrated, 1-1/4"-1-1/8"
Brakes	Tektro HD-R280 hydraulic disc, 160/140mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Fitness Ergo Double Density
Seatpost	6061 Alloy, 27.2 × 350mm
Sizes	S, M, L, XL, 2XL
Color 1	Black Pearl (BPL)

Quick 3

Color 1 - Mango



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C31301M

Frame	SmartForm C3 Alloy, SAVE, tapered head tube, Straightshot hidden cable routing, flat mount disc, rack/fender mounts, 360° reflectivity
Fork	Full carbon, 12×100mm thru-axle, 1-1/4" to 1-1/8" tapered steerer, flat mount disc, fender mounts, 360° reflectivity
Rims	Cannondale Disc, double wall w/eyelet, 32h
Hubs	(F) Formula CRX-512, 12×100mm / (R) Formula DC-1422, QR
Spokes	Stainless Steel, 14g
Tires	Schwalbe Spicer, 700 × 35c, K-Guard, reflective strip
Pedals	Cannondale Fitness Reinforced Composite
Crank	Prowheel, 48/32
Bottom Bracket	Cartridge, square taper
Chain	KMC Z9, 9-speed
Rear Cogs	Sunrace, 11-34, 9-speed

Front Derailleur	Shimano Acera, 31.8 clamp
Rear Derailleur	Shimano Altus
Shifters	Shimano Altus, 9-speed
Handlebar	6061 Alloy Double-butted, 25mm rise, 8° sweep, 6° rise, 640mm
Grips	Cannondale Ergo Fitness Dual Density, Lock-On
Stem	Cannondale 3 with Intellimount, Alloy, 31.8mm clamp
Headset	FSA Sealed Bearing, integrated, 1-1/4"-1-1/8"
Brakes	Tektro HD-R280 hydraulic disc, 160/140mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Fitness Ergo Double Density
Seatpost	6061 Alloy, 27.2 × 350mm
Sizes	SM, MD, LG, XL, 2XL
Color 1	Mango (MGO)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Quick Women's 3 Remixte

Color 1 - Sage

Color 2 - Turquoise





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C31351U

Frame	Low-step, SmartForm C3 Alloy, SAVE, tapered head tube, Straightshot hidden cable routing, flat mount disc, rack/ fender mounts, 360° reflectivity
Fork	Full carbon, 12×100mm thru-axle, 1-1/4" to 1-1/8" tapered steerer, flat mount disc, fender mounts, 360° reflectivity
Rims	Cannondale Disc, double wall w/eyelet, 32h
Hubs	(F) Formula CRX-512, 12×100mm / (R) Formula DC-1422, QR
Spokes	Stainless Steel, 14g
Tires	Schwalbe Spicer, 700 × 35c, K-Guard, reflective strip
Pedals	Cannondale Fitness Reinforced Composite
Crank	Prowheel, 48/32
Bottom Bracket	Cartridge, square taper
Chain	KMC Z9, 9-speed
Rear Cogs	Sunrace, 11-34, 9-speed
Front Derailleur	Shimano Acera, 31.8 clamp
Rear Derailleur	Shimano Altus
Shifters	Shimano Altus, 9-speed
Handlebar	6061 Alloy Double-butted, 25mm rise, 8° sweep, 6° rise, 640mm
Grips	Cannondale Ergo Fitness Dual Density, Lock-On
Stem	Cannondale 3 with Intellimount, Alloy, 31.8mm clamp
Headset	FSA Sealed Bearing, integrated, 1-1/4"-1-1/8"
Brakes	Tektro HD-R280 hydraulic disc, 160/140mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Fitness Ergo Double Density
Seatpost	6061 Alloy, 27.2 × 350mm
Sizes	XS, SM, MD, LG
Color 1	Sage (SGE)
Color 2	Turquoise (TRQ)

Quick 4

Color 1 - Graphite



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C31400M

Frame	SmartForm C3 Alloy, SAVE, tapered head tube, Straightshot hidden cable routing, flat mount disc, rack/fender mounts, 360° reflectivity
Fork	Steel blades, 1-1/8" steerer, OutFront offset, flat mount disc, mid-blade mounts
Rims	Cannondale Disc, double wall w/eyelet, 32h
Hubs	(F) Sealed Alloy Disc, QR / (R)Sealed Alloy Disc, QR
Spokes	Stainless steel, 14g
Tires	Schwalbe Spicer, 700 × 35c, K-Guard, reflective strip
Pedals	Cannondale Fitness
Crank	Prowheel, 38T
Bottom Bracket	Cartridge, square taper
Chain	KMC Z9, 9-speed
Rear Cogs	microSHIFT, 11-42, 9-speed
Rear Derailleur	microSHIFT Advent
Shifters	microSHIFT Advent, 9-speed
Handlebar	6061 Alloy Double-butted, 25mm rise, 8° sweep, 6° rise, 640mm
Grips	Cannondale Ergo Fitness Dual Density, Lock-On
Stem	Cannondale 3 with Intellimount, Alloy, 31.8mm clamp
Headset	FSA Sealed Bearing, integrated, 1-1/8"
Brakes	Tektro HD-R280 hydraulic disc, 160mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Fitness Ergo Double Density
Seatpost	6061 Alloy, 27.2 × 350mm
Sizes	SM, MD, LG, XL, 2XL
Color 1	Graphite (GRA)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Quick Women's 4

Color 1 - Ginger



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C31400F

Frame	SmartForm C3 Alloy, SAVE, tapered head tube, Straightshot hidden cable routing, flat mount disc, rack/fender mounts, 360° reflectivity
Fork	Steel blades, 1-1/8" steerer, OutFront offset, flat mount disc, mid-blade mounts
Rims	Cannondale Disc, double wall w/eyelet, 32h
Hubs	(F) Sealed Alloy Disc, QR / (R) Sealed Alloy Disc, QR
Spokes	Stainless Steel, 14g
Tires	Schwalbe Spicer, 700 × 35c, K-Guard, reflective strip
Pedals	Cannondale Fitness
Crank	Prowheel, 38T
Bottom Bracket	Cartridge, square taper
Chain	KMC Z9, 9-speed
Rear Cogs	microSHIFT, 11-42, 9-speed
Rear Derailleur	microSHIFT Advent
Shifters	microSHIFT Advent, 9-speed
Handlebar	6061 Alloy Double-butted, 25mm rise, 8° sweep, 6° rise, 640mm
Grips	Cannondale Ergo Fitness Dual Density, lock-on
Stem	Cannondale 3 with Intellimount, Alloy, 31.8mm clamp
Headset	FSA Sealed Bearing, integrated, 1-1/4"
Brakes	Tektro HD-R280 hydraulic disc, 160mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Fitness Ergo Double Density
Seatpost	6061 Alloy, 27.2 × 350mm
Sizes	XS, SM, MD, LG
Color 1	Ginger (GIN)

Quick 5

Color 1 - Matte Black

Color 2 - Acid Lime





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C31501M

Frame	SmartForm C3 Alloy, SAVE, tapered head tube, Straightshot hidden cable routing, flat mount disc, rack/fender mounts, 360° reflectivity
Fork	Chromoly, 1-1/8" steerer, OutFront offset, flat mount disc, mid-blade mounts
Rims	Cannondale Disc, double wall w/eyelet, 32h
Hubs	(F) Shimano HB-TX505, QR / (R) Shimano FH-TY505, QR
Spokes	Stainless Steel, 14g
Tires	Schwalbe Spicer, 700 × 35c, K-Guard, reflective strip
Pedals	Cannondale Fitness
Crank	Shimano Tourney, 46/30
Bottom Bracket	Cartridge, square taper
Chain	KMC Z7, 7-speed
Rear Cogs	Shimano HG200, 12-32, 7-speed
Front Derailleur	Shimano Tourney, 31.8 clamp
Rear Derailleur	Shimano Tourney
Shifters	Shimano M315 Rapidfire Plus, 7-speed
Handlebar	6061 Alloy Double-butted, 25mm rise, 8° sweep, 6° rise, 640mm
Grips	Cannondale Ergo Fitness
Stem	6061 Alloy, 31.8, 8°
Headset	Integrated, 1-1/4"-1-1/8"
Brakes	Promax mechanical disc, 160/160mm rotors
Brake Levers	Promax BL42
Saddle	Cannondale Fitness Ergo Double Density
Seatpost	6061 Alloy, 27.2 × 350mm
Sizes	SM, MD, LG, XL, 2XL
Color 1	Matte Black (BBQ)
Color 2	Acid Lime (ALM)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Quick Women's 5 Remixte

Color 1 - Sage Gray

Color 2 - Lavendar





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C31551U

Frame	Low-step, SmartForm C3 Alloy, SAVE, tapered head tube, Straightshot hidden cable routing, flat mount disc, rack/ fender mounts, 360° reflectivity
Fork	Chromoly, 1-1/8" steerer, OutFront offset, flat mount disc, mid-blade mounts
Rims	Cannondale Disc, double wall w/eyelet, 32h
Hubs	(F) Shimano HB-TX505, QR / (R) Shimano FH-TY505, QR
Spokes	Stainless Steel, 14g
Tires	Schwalbe Spicer, 700 × 35c, K-Guard, reflective strip
Pedals	Cannondale Fitness
Crank	Shimano Tourney, 46/30
Bottom Bracket	Cartridge, square taper
Chain	KMC Z7, 7-speed
Rear Cogs	Shimano HG200, 12-32, 7-speed

Front Derailleur	Shimano Tourney, 31.8 clamp
Rear Derailleur	Shimano Tourney
Shifters	Shimano M315 Rapidfire Plus, 7-speed
Handlebar	6061 Alloy Double-butted, 25mm rise, 8° sweep, 6° rise, 640mm
Grips	Cannondale Ergo Fitness
Stem	6061 Alloy, 31.8, 8°
Headset	Integrated, 1-1/4"-1-1/8"
Brakes	Promax mechanical disc, 160/160mm rotors
Brake Levers	Promax BL42
Saddle	Cannondale Fitness Ergo Double Density
Seatpost	6061 Alloy, 27.2 × 350mm
Sizes	XS, SM, MD, LG
Color 1	Sage Gray (SGG)
Color 2	Lavender (LAV)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Quick CX EQ

Color 1 - Abyss



Specifications

C31171M

Frame	SmartForm C3 Alloy, SAVE, tapered head tube, Straightshot hidden cable routing, flat mount disc, rack/fender mounts, 360° reflectivity
Fork	Suntour NEX-E25, 63mm travel, coil, lockout, custom crown
Rims	Cannondale Disc, double wall w/eyelet, 32h
Hubs	(F) Shimano Dynamo DH-3D37 / (R) Shimano FH-TX505
Spokes	Stainless steel, 14g
Tires	Schwalbe Road Crusier, 700 x 32c, reflective strip
Pedals	Reinforced folding nylon pedals
Crank	Shimano Tourney, 46/30
Bottom Bracket	Cartridge, square taper
Chain	KMC X8, 8-speed
Rear Cogs	Sunrace, 11-34, 8-speed
Front Derailleur	Shimano Tourney, 31.8 clamp
Rear Derailleur	Shimano Acera
Shifters	Shimano ST-EF505, 8-speed
Handlebar	Cannondale Riser, 6061 Alloy, 25mm rise, 8° sweep, 6° rise, 700mm
Grips	Cannondale Dual-Density
Stem	90 degree rotatable, 31.8, 7°
Headset	Semi-Integrated, Tapered, 1-1/2"-1-1/8"
Brakes	(F) Tektro HD-T275 hydraulic disc, 160mm rotor / (R) Tektro HD-R280 hydraulic disc, 160mm rotor
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Fitness Ergo Double Density
Seatpost	6061 Alloy, 27.2 × 350mm
Sizes	SM, MD, LG, XL, 2XL
Color 1	Abyss (ABB)
Extras	Alloy Fenders, Rear Rack, Spanninga Front and Rear Dynamo Lights, Kickstand

Quick CX 2

Color 1 - Cinnamon



Specifications

C31251M

Frame	SmartForm C3 Alloy, SAVE, tapered head tube, Straightshot hidden cable routing, flat mount disc, rack/fender mounts, 360° reflectivity
Fork	Suntour NEX-E25, 63mm, tapered alloy steerer, coil, remote lockout, custom crown
Rims	DC 4.0, double wall w/eyelet, 32h
Hubs	(F) Sealed Alloy Disc, QR / (R) Sealed Alloy Disc, QR
Spokes	Stainless Steel, 14g
Tires	Vittoria Terreno Dry, 700 × 40, reflective strip
Pedals	Cannondale Platform
Crank	Shimano MT210, 46/30
Bottom Bracket	Cartridge, square taper
Chain	KMC Z9, 9-speed
Rear Cogs	Shimano HG200, 11-34, 9-speed
Front Derailleur	Shimano Acera, 31.8 clamp
Rear Derailleur	Shimano Alivio, Shadow SGS
Shifters	Shimano ST-EF505, 9-speed
Handlebar	Cannondale Riser, 6061 Alloy, 25mm rise, 8° sweep, 6° rise, 700mm
Grips	Fabric FunGuy
Stem	Cannondale 3 with Intellimount, Alloy, 31.8mm clamp
Headset	Semi-Integrated, Tapered
Brakes	(F) Tektro HD-T275 hydraulic disc, 160mm rotor / (R) Tektro HD-R280 hydraulic disc, 160mm rotor
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Fitness Ergo Double Density
Seatpost	6061 Alloy, 27.2 × 350mm
Sizes	SM, MD, LG, XL, 2XL
Color 1	Cinnamon (CIN)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Quick CX 3

Color 1 - Slate



Specifications

C31351M

Frame	SmartForm C3 Alloy, SAVE, tapered head tube, Straightshot hidden cable routing, flat mount disc, rack/fender mounts, 360° reflectivity
Fork	Suntour NEX-E25, 63mm, coil, lockout, custom crown
Rims	DC 4.0, double wall w/eyelet, 32h
Hubs	(F) Sealed Alloy Disc, QR / (R) Sealed Alloy Disc, QR
Spokes	Stainless Steel, 14g
Tires	Vittoria Terreno Dry, 700 × 40, reflective strip
Pedals	Cannondale Platform
Crank	Shimano Tourney, 46/30
Bottom Bracket	Cartridge, square taper
Chain	KMC X8, 8-speed
Rear Cogs	Sunrace, 11-34, 8-speed
Front Derailleur	Shimano Tourney, 31.8 clamp
Rear Derailleur	Shimano Acera
Shifters	Shimano ST-EF505, 8-speed
Handlebar	Cannondale Riser, 6061 Alloy, 25mm rise, 8° sweep, 6° rise, 700mm
Grips	Cannondale Dual-Density
Stem	Cannondale 3 with Intellimount, Alloy, 31.8mm clamp
Headset	Semi-Integrated, Tapered
Brakes	(F) Tektro HD-T275 hydraulic disc, 160mm rotor / (R) Tektro HD-R280 hydraulic disc, 160mm rotor
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Fitness Ergo Double Density
Seatpost	6061 Alloy, 27.2 × 350mm
Sizes	SM, MD, LG, XL, 2XL
Color 1	Slate (SLT)

Quick CX 4

Color 1 - Black



Specifications

C31451M

Frame	SmartForm C3 Alloy, SAVE, tapered head tube, Straightshot hidden cable routing, flat mount disc, rack/fender mounts, 360° reflectivity
Fork	Suntour NEX-E25, 63mm, coil, custom crown
Rims	DC 4.0, double wall w/eyelet, 32h
Hubs	(F) Sealed Alloy Disc, QR / (R) Sealed Alloy Disc, QR
Spokes	Stainless Steel, 14g
Tires	Vittoria Terreno Dry, 700 × 40, reflective strip
Pedals	Cannondale Platform
Crank	Prowheel, 48/38/28
Bottom Bracket	Cartridge, square taper
Chain	KMC Z7, 7-speed
Rear Cogs	Sunrace, 14-34, 7-speed
Front Derailleur	microSHIFT Dual Pull Compact, Band Clamp
Rear Derailleur	microSHIFT M26L
Shifters	microSHIFT, 3×7-speed
Handlebar	Cannondale Riser, 6061 Alloy, 25mm rise, 8° sweep, 6° rise, 700mm
Grips	Cannondale Dual-Density
Stem	6061 Alloy, 31.8, 8°
Headset	Semi-Integrated, Tapered
Brakes	Promax mechanical disc, 160/160mm rotors
Brake Levers	Promax
Saddle	Cannondale Fitness Ergo Double Density
Seatpost	6061 Alloy, 27.2 × 350mm
Sizes	SM, MD, LG, XL, 2XL
Color 1	Black (BLK)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Treadwell EQ DLX

Color 1 - Black Magic



Specifications

C37131M

Frame	SmartForm C3 Alloy, Ride-Easy low-standover geometry, Straightshot hidden cable routing, Urban Armor frame bumpers, flat mount disc, rack/fender mounts
Fork	SmartForm C3 Alloy blades, 1-1/8" steerer, OutFront offset, flat mount disc, mid-blade mounts
Rims	Cannondale Disc, double wall w/eyelet, 32h
Hubs	(F) Shimano Dynamo DH-3D37 / (R) Sealed Alloy Disc, 5mm Hex Security QR
Spokes	Stainless steel, 14g
Tires	Maxxis DTR-1, 650b x 47c
Pedals	Cannondale Comfort
Crank	Prowheel, 38T
Bottom Bracket	Cartridge, square taper
Chain	KMC X9, 9-speed
Rear Cogs	microSHIFT, 11-42, 9-speed
Rear Derailleur	microSHIFT Advent
Shifters	microSHIFT Advent, 9-speed
Handlebar	Cannondale Cruise Control riser, 6061 Alloy, 31.8mm, 15° back, 740mm
Grips	Cannondale Comfort
Stem	Cannondale 3 with Intellimount, Alloy, 31.8, 6°
Headset	Semi-Integrated, 1-1/8"
Brakes	Tektro HD-R280 hydraulic disc, 160/140mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Treadwell, 170mm, steel rails
Seatpost	Alloy, 31.6 × 350mm
Connectivity	Cannondale Wheel Sensor
Sizes	SM, MD, LG
Color 1	Black Magic (BKM)
Extras	Alloy Fenders, Front and Rear Rack, Kickstand, Spanninga Front and Rear Dynamo Lights

Treadwell EQ DLX Remixte

Color 1 - Black Magic



Specifications

C37131U

Frame	SmartForm C3 Alloy, step-thru Ride-Easy geometry, Straightshot hidden cable routing, Urban Armor frame bumpers, flat mount disc, rack/fender mounts
Fork	SmartForm C3 Alloy blades, 1-1/8" steerer, OutFront offset, flat mount disc, mid-blade mounts
Rims	Cannondale Disc, double wall w/eyelet, 32h
Hubs	(F) Shimano Dynamo DH-3D37 / (R) Sealed Alloy Disc, 5mm Hex Security QR
Spokes	Stainless steel, 14g
Tires	Maxxis DTR-1, 650b x 47c
Pedals	Cannondale Comfort
Crank	Prowheel, 38T
Bottom Bracket	Cartridge, square taper
Chain	KMC X9, 9-speed
Rear Cogs	microSHIFT, 11-42, 9-speed
Front Derailleur	Shimano Tourney, 31.8 clamp
Rear Derailleur	microSHIFT Advent
Shifters	microSHIFT Advent, 9-speed
Handlebar	Cannondale Cruise Control riser, 6061 Alloy, 31.8mm, 15° back, 740mm
Grips	Cannondale Comfort
Stem	Cannondale 3 with Intellimount, Alloy, 31.8, 6°
Headset	Semi-Integrated, 1-1/8"
Brakes	Tektro HD-R280 hydraulic disc, 160/140mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Treadwell, 170mm, steel rails
Seatpost	Alloy, 31.6 × 350mm
Connectivity	Cannondale Wheel Sensor
Sizes	SM, LG
Color 1	Black Magic (BKM)
Extras	Alloy Fenders, Front and Rear Rack, Kickstand, Spanninga Front and Rear Dynamo Lights

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Treadwell 2 Ltd

Color 1 - Raw



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C37201M

Frame	SmartForm C3 Alloy, Ride-Easy low-standover geometry, Straightshot hidden cable routing, Urban Armor frame bumpers, flat mount disc, rack/fender mounts
Fork	SmartForm C3 Alloy blades, 1-1/8" steerer, OutFront offset, flat mount disc, mid-blade rack/fender mounts
Rims	Cannondale, double wall, 32h
Hubs	(F) Sealed Alloy Disc, 5mm Hex Security QR / (R) Sealed Alloy Disc, 5mm Hex Security QR
Spokes	Stainless Steel, 14g
Tires	Maxxis DTR-1, 650b x 47c
Pedals	Cannondale Comfort
Crank	Prowheel, 38T
Bottom Bracket	Cartridge, square taper
Chain	KMC X9, 9-speed
Rear Cogs	microSHIFT, 11-42, 9-speed

Rear Derailleur	microSHIFT Advent
Shifters	microSHIFT Advent, 9-speed
Handlebar	Cannondale Cruise Control riser, 6061 Alloy, 31.8mm, 15° back, 740mm
Grips	Cannondale Comfort
Stem	Cannondale 3 with Intellimount, Alloy, 31.8mm clamp
Headset	Semi-Integrated
Brakes	Tektro HD-R28 hydraulic disc, 160/140mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Treadwell, 170mm, steel rails
Seatpost	6061 Alloy, 31.6 × 350mm
Connectivity	Cannondale Wheel Sensor
Sizes	SM, MD, LG
Color 1	Raw (RAW)

Treadwell 2 Remixte Ltd

Color 1 - Raw



Specifications

C37201U

Frame	SmartForm C3 Alloy, Low-step Ride-Easy geometry, Straightshot hidden cable routing, Urban Armor frame bumpers, flat mount disc, rack/fender mounts
Fork	SmartForm C3 Alloy blades, 1-1/8" steerer, OutFront offset, flat mount disc, mid-blade rack/fender mounts
Rims	Cannondale, double wall, 32h
Hubs	(F) Sealed Alloy Disc, 5mm Hex Security QR / (R) Sealed Alloy Disc, 5mm Hex Security QR
Spokes	Stainless Steel, 14g
Tires	Maxxis DTR-1, 650b x 47c
Pedals	Cannondale Comfort
Crank	Prowheel, 38T
Bottom Bracket	Cartridge, square taper
Chain	KMC X9, 9-speed
Rear Cogs	microSHIFT, 11-42, 9-speed

Rear Derailleur	microSHIFT Advent
Shifters	microSHIFT Advent, 9-speed
Handlebar	Cannondale Cruise Control riser, 6061 Alloy, 31.8mm, 15° back, 740mm
Grips	Cannondale Comfort
Stem	Cannondale 3 with Intellimount, Alloy, 31.8mm clamp
Headset	Semi-Integrated
Brakes	Tektro HD-R280 hydraulic disc, 160/140mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Treadwell, 170mm, steel rails
Seatpost	6061 Alloy, 31.6 × 350mm
Connectivity	Cannondale Wheel Sensor
Sizes	SM, LG
Color 1	Raw (RAW)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Treadwell 2

Color 1 - Deep Teal



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C37201U

Frame	SmartForm C3 Alloy, Ride-Easy low-standover geometry, Straightshot hidden cable routing, Urban Armor frame bumpers, flat mount disc, rack/fender mounts
Fork	SmartForm C3 Alloy blades, 1-1/8" steerer, OutFront offset, flat mount disc, mid-blade rack/fender mounts
Rims	Cannondale, double wall, 32h
Hubs	(F) Sealed Alloy Disc, 5mm Hex Security QR / (R) Sealed Alloy Disc, 5mm Hex Security QR
Spokes	Stainless Steel, 14g
Tires	Maxxis DTR-1, 650b x 47c
Pedals	Cannondale Comfort
Crank	Prowheel, 38T
Bottom Bracket	Cartridge, square taper
Chain	KMC X9, 9-speed
Rear Cogs	microSHIFT, 11-42, 9-speed
Rear Derailleur	microSHIFT Advent
Shifters	microSHIFT Advent, 9-speed
Handlebar	Cannondale Cruise Control riser, 6061 alloy, 31.8mm, 15° back, 740mm
Grips	Cannondale Comfort
Stem	Cannondale 3 with Intellimount, alloy, 31.8mm clamp
Headset	Semi-Integrated
Brakes	Tektro HD-R280 hydraulic disc, 160/160mm rotors
Brake Levers	Tektro HD-R280 hydraulic disc
Saddle	Cannondale Treadwell, 170mm, steel rails
Seatpost	6061 Alloy, 31.6 × 350mm
Sizes	SM, MD, LG
Color 1	Deep Teal (DTE)

Treadwell 2 Remixte

Color 1 - Jade



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C37200U

Frame	SmartForm C3 Alloy, Low-step Ride-Easy geometry, Straightshot hidden cable routing, Urban Armor frame bumpers, flat mount disc, rack/fender mounts
Fork	SmartForm C3 Alloy blades, 1-1/8" steerer, OutFront offset, flat mount disc, mid-blade rack/fender mounts
Rims	Cannondale, double wall, 32h
Hubs	(F) Sealed Alloy Disc, 5mm Hex Security QR / (R) Sealed Alloy Disc, 5mm Hex Security QR
Spokes	Stainless Steel, 14g
Tires	Maxxis DTR-1, 650b x 47c
Pedals	Cannondale Comfort
Crank	Prowheel, 38T
Bottom Bracket	Cartridge, square taper
Chain	KMC X9, 9-speed
Rear Cogs	microSHIFT, 11-42, 9-speed
Rear Derailleur	microSHIFT Advent
Shifters	microSHIFT Advent, 9-speed
Handlebar	Cannondale Cruise Control riser, 6061 Alloy, 31.8mm, 15° back, 740mm
Grips	Cannondale Comfort
Stem	Cannondale 3 with Intellimount, Alloy, 31.8mm clamp
Headset	Semi-Integrated
Brakes	Tektro HD-R280 hydraulic disc, 160/140mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Treadwell, 170mm, steel rails
Seatpost	6061 Alloy, 31.6 × 350mm
Sizes	SM, LG
Color 1	Jade (JDE)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Treadwell EQ

Color 1 - Alpine



Specifications

C37151M

Frame	SmartForm C3 Alloy, Ride-Easy low-standover geometry, Straightshot hidden cable routing, Urban Armor frame bumpers, flat mount disc, rack/fender mounts
Fork	SmartForm C3 Alloy blades, 1-1/8" steerer, OutFront offset, flat mount disc, mid-blade rack/fender mounts
Rims	Cannondale, double wall, 32h
Hubs	Sealed Alloy Disc, 5mm Hex Security QR
Spokes	Stainless Steel, 14g
Tires	Maxxis DTR-1, 650b x 47c
Pedals	Cannondale Comfort
Crank	Prowheel, 38T
Bottom Bracket	Cartridge, square taper
Chain	KMC X9, 9-speed
Rear Cogs	Shimano HG200, 11-36, 9-speed
Rear Derailleur	Shimano Altus
Shifters	Shimano Altus, 9-speed
Handlebar	Cannondale Cruise Control riser, 6061 alloy, 31.8mm, 15° back, 740mm
Grips	Cannondale Comfort
Stem	Cannondale 3 with Intellimount, alloy, 31.8mm clamp
Headset	Semi-Integrated
Brakes	Tektro HD-R280 hydraulic disc, 160/140mm rotors
Brake Levers	Tektro HD-R280 hydraulic disc
Saddle	Cannondale Treadwell, 170mm, steel rails
Seatpost	6061 Alloy, 31.6 × 350mm
Connectivity	Cannondale Wheel Sensor
Sizes	SM, MD, LG
Color 1	Alpine (ALP)
Extras	Front Rack, Alloy Fenders, Kickstand

Treadwell EQ Remixte

Color 1 - Alpine



Specifications

C37151U

Frame	Low-step, SmartForm C3 Alloy, Low-step Ride-Easy geometry, Straightshot hidden cable routing, Urban Armor frame bumpers, flat mount disc, rack/fender mounts
Fork	SmartForm C3 Alloy blades, 1-1/8" steerer, OutFront offset, flat mount disc, mid-blade rack/fender mounts
Rims	Cannondale, double wall, 32h
Hubs	Sealed Alloy Disc, 5mm Hex Security QR
Spokes	Stainless Steel, 14g
Tires	Maxxis DTR-1, 650b x 47c
Pedals	Cannondale Comfort
Crank	Prowheel, 38T
Bottom Bracket	Cartridge, square taper
Chain	KMC X9, 9-speed
Rear Cogs	Shimano HG200, 11-36, 9-speed
Rear Derailleur	Shimano Altus
Shifters	Shimano Altus, 9-speed
Handlebar	Cannondale Cruise Control riser, 6061 alloy, 31.8mm, 15° back, 740mm
Grips	Cannondale Comfort
Stem	Cannondale 3 with Intellimount, alloy, 31.8mm clamp
Headset	Semi-Integrated
Brakes	Tektro HD-R280 hydraulic disc, 160/160mm rotors
Brake Levers	Tektro HD-R280 hydraulic disc
Saddle	Cannondale Treadwell, 170mm, steel rails
Seatpost	6061 Alloy, 31.6 × 350mm
Connectivity	Cannondale Wheel Sensor
Sizes	SM, LG
Color 1	Alpine (ALP)
Extras	Front Rack, Alloy Fenders, Kickstand

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Bad Boy 1

Color 1 - Matte Black



Specifications

C33100M

Frame	SmartForm C1 Alloy, integrated Urban Armor bumper, BSA, 1-1/8" headtube, sliding dropout
Fork	Lefty LightPipe rigid, integrated SuperNova LED lightstrip, USB rechargeable battery, 1-1/8" steerer
Rims	Cannondale, double wall w/eyelets, 32h
Hubs	(F) Lefty 50 front / (R) Shimano Alfine 8-speed internal rear
Spokes	Stainless Steel, 14g
Tires	WTB Byway, 650b x 40c
Pedals	Cannondale Urban Pedal
Crank	Gates S150, Gates Belt Drive CDX sprocket 46T
Bottom Bracket	Thun Zumba
Chain	Gates Carbon Drive, CDX Centertrack, 113T
Rear Cogs	Gates, CDX, 22T
Shifters	Shimano Alfine Rapidfire, 8-speed
Handlebar	Cannondale Riser, 6061 Alloy, 18mm rise, 8° back, 4° up, 680mm
Grips	Fabric Silicone Cell
Stem	Bad Boy Si, integrated sandwich stem, 65mm
Headset	FSA Cartridge Bearing
Brakes	Shimano MT400 hydraulic disc, 160/160mm RT26/RT30 rotors
Brake Levers	Shimano MT401 hydraulic disc
Saddle	Fabric Scoop Radius Elite, cro-mo rails
Seatpost	LightSkin w/ integrated rear LED light, 31.6, USB Rechargeable
Sizes	SM, MD, LG, XL
Color 1	Matte Black (BBQ)

Bad Boy 2

Color 1 - Matte Black



Specifications

C33200M

Frame	SmartForm C2 Alloy, integrated Urban Armor bumper, BSA threaded BB, 1-1/8" headtube
Fork	Lefty LightPipe rigid, integrated SuperNova LED lightstrip, USB rechargeable battery, 1-1/8" steerer
Rims	Cannondale, double wall, 32h
Hubs	(F) Lefty 50 / (R) Formula DC-1422 QR
Spokes	Stainless Steel, 14g
Tires	WTB Byway, 650b x 40c
Pedals	Cannondale Urban Pedal
Crank	Shimano MT210, 46/30
Bottom Bracket	Cartridge, sealed
Chain	KMC Z9, 9-speed
Rear Cogs	Sunrace, 11-32, 9-speed
Front Derailleur	microSHIFT Dual Pull Compact, Steel Cage, Steel Band Clamp
Rear Derailleur	microSHIFT M36L
Shifters	microSHIFT, 9-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 18mm rise, 8° back, 4° up, 680mm
Grips	Cannondale Comfort
Stem	Bad Boy, 6061 Alloy, 31.8, 60mm
Headset	Semi-Integrated
Brakes	Tektro M275 hydraulic disc, 160/160mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Urban
Seatpost	LightSkin w/ integrated rear LED light, 31.6, USB Rechargeable
Sizes	SM, MD, LG, XL
Color 1	Matte Black (BBQ)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Bad Boy 3

Color 1 - Matte Black



Specifications


C33300M

Frame	SmartForm C2 Alloy, integrated Urban Armor bumper, BSA threaded BB, 1-1/8" headtube
Fork	Lefty Rigid, 1-1/8" steerer
Rims	Cannondale, double wall, 32h
Hubs	(F) Lefty 50 / (R) Formula DC-1422 QR
Spokes	Stainless Steel, 14g
Tires	WTB Byway, 650b x 40c
Pedals	Cannondale Urban Pedal
Crank	Prowheel, 46-30
Bottom Bracket	Cartridge, sealed
Chain	KMC Z8, 8-speed
Rear Cogs	Shimano HG41, 11-32, 8-speed
Front Derailleur	microSHIFT Dual Pull Compact, Steel Cage, Steel Band Clamp
Rear Derailleur	microSHIFT M26L
Shifters	microSHIFT, 8-speed
Handlebar	6061 Alloy Double-butted, 25mm rise, 680mm
Grips	Cannondale Comfort
Stem	Bad Boy, 6061 Alloy, 31.8, 60mm
Headset	Semi-Integrated
Brakes	Tektro M275 hydraulic disc, 160/160mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Urban
Seatpost	Alloy, 31.6 × 350mm
Sizes	SM, MD, LG, XL
Color 1	Matte Black (BBQ)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022


Quick Remixte

	XS	SM	MD	LG
A **Seat Tube Length (cm)**	35.0	40.0	45.0	50.0
B **Top Tube Horizontal (cm)**	55.2	56.7	58.3	59.8
C **Top Tube Actual (cm)**	NA	NA	NA	NA
D **Head Tube Angle**	70.0°	71.0°	71.0°	71.0°
E **Seat Tube Angle Effective**	73.0°	73.0°	73.0°	73.0°
F **Standover (cm)**	61.0	61.5	62.1	62.6
G **Head Tube Length (cm)**	11.2	13.3	15.8	18.4
H **Wheelbase (cm)**	104.6	105.3	107.0	108.6
I **Front Center (cm)**	62.0	62.7	64.4	66.0
J **Chain Stay Length (cm)**	43.5	43.5	43.5	43.5
K **Bottom Bracket Drop (cm)**	6.8	6.8	6.8	6.8
L **Bottom Bracket Height (cm)**	28.2	28.2	28.2	28.2
M **Fork Rake (cm)**	5.5	5.5	5.5	5.5
N **Trail (cm)**	6.9	6.2	6.2	6.2
O **Stack (cm)**	53	55.4	57.8	60.2
P **Reach (cm)**	39.0	39.8	40.6	41.4

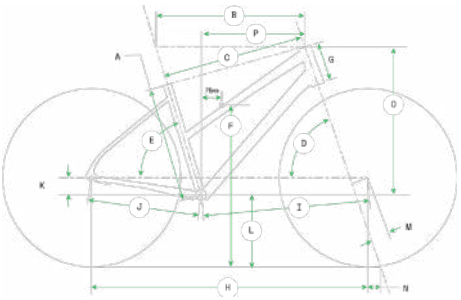


Quick CX

	SM	MD	LG	XL	2XL
A **Seat Tube Length (cm)**	40.0	45.0	50.0	55.0	60.0
B **Top Tube Horizontal (cm)**	58.2	59.7	61.2	62.8	64.3
C **Top Tube Actual (cm)**	55.9	57.1	58.6	60.4	62.3
D **Head Tube Angle**	69.0	69.0	69.0	69.0	69.0
E **Seat Tube Angle Effective**	73.0	73.0	73.0	73.0	73.0
F **Standover (cm)**	72.5	76.4	80.2	84.0	87.6
G **Head Tube Length (cm)**	10.8	12.6	14.3	16.2	18.0
H **Wheelbase (cm)**	110.8	112.4	114.1	115.8	117.4
I **Front Center (cm)**	66.6	68.2	69.8	71.5	73.2
J **Chain Stay Length (cm)**	45.0	45.0	45.0	45.0	45.0
K **Bottom Bracket Drop (cm)**	6.4	6.4	6.4	6.4	6.4
L **Bottom Bracket Height (cm)**	29.3	29.3	29.3	29.3	29.3
M **Fork Rake (cm)**	5.5	5.5	5.5	5.5	5.5
N **Trail (cm)**	7.8	7.8	7.8	7.8	7.8
O **Stack (cm)**	59.0	60.7	62.3	64.0	65.7
P **Reach (cm)**	40.2	41.2	42.2	43.2	44.2

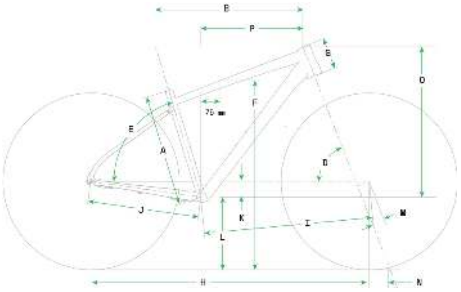


Treadwell

	SM	MD	LG
A **Seat Tube Length (cm)**	38.7	45.0	51.3
B **Top Tube Horizontal (cm)**	55.7	57.9	60.0
C **Top Tube Actual (cm)**	NA	NA	NA
D **Head Tube Angle**	70.5°	71.0°	71.0°
E **Seat Tube Angle**	71.0°	71.0°	71.0°
F **Standover (cm)**	66.5	70.9	74.7
G **Head Tube Length (cm)**	13.5	16.5	19.6
H **Wheelbase (cm)**	105.9	107.6	109.7
I **Front Center (cm)**	60.1	61.8	63.9
J **Chain Stay Length (cm)**	46.0	46.0	46.0
K **Bottom Bracket Drop (cm)**	6.4	6.4	6.4
L **Bottom Bracket Height (cm)**	28.0	28.0	28.0
M **Fork Rake (cm)**	5.5	5.5	5.5
N **Trail (cm)**	6.3	6.0	6.0
O **Stack (cm)**	55.0	58.0	61.0
P **Reach (cm)**	36.8	37.9	39.0

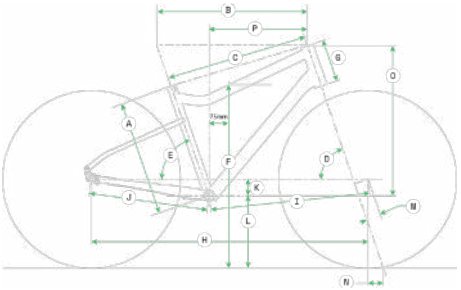

Treadwell Remixte


	SM	LG
A **Seat Tube Length (cm)**	38.7	45.0
B **Top Tube Horizontal (cm)**	55.7	57.9
C **Top Tube Actual (cm)**	NA	NA
D **Head Tube Angle**	70.5°	71.0°
E **Seat Tube Angle**	71.0°	71.0°
F **Standover (cm)**	54.5	54.9
G **Head Tube Length (cm)**	13.5	16.5
H **Wheelbase (cm)**	105.9	107.6
I **Front Center (cm)**	60.1	61.8
J **Chain Stay Length (cm)**	46.5	46.5
K **Bottom Bracket Drop (cm)**	6.4	6.4
L **Bottom Bracket Height (cm)**	28.0	28.0
M **Fork Rake (cm)**	5.5	5.5
N **Trail (cm)**	6.3	6.0
O **Stack (cm)**	55.0	58.0
P **Reach (cm)**	36.8	37.9

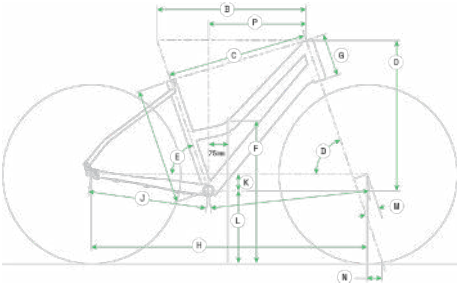

* Indicates same as previous


Adventure

	SM	MD	LG
A **Seat Tube Length (cm)**	38.0	45.0	51.0
B **Top Tube Horizontal (cm)**	62.6	63.9	65.3
C **Top Tube Actual (cm)**	58.6	59.3	60.6
D **Head Tube Angle**	69.0°	69.0°	69.0°
E **Seat Tube Angle**	68.0°	68.1°	68.1°
E **Seat Tube Angle**	69.0°	69.0°	69.0°
F **Standover (cm)**	41.0	41.0	40.7
G **Head Tube Length (cm)**	18.6	20.4	22.2
H **Wheelbase (cm)**	111.5	112.9	114.2
I **Front Center (cm)**	66.3	67.6	69.0
J **Chain Stay Length (cm)**	46.0	46.0	46.0
K **Bottom Bracket Drop (cm)**	6.4	6.4	6.4
L **Bottom Bracket Height (cm)**	28.8	28.8	28.8
M **Fork Rake (cm)**	5.5	5.5	5.5
N **Trail (cm)**	7.6	7.6	7.6
O **Stack (cm)**	65.0	66.7	68.4
P **Reach (cm)**	37.6	38.3	39.0

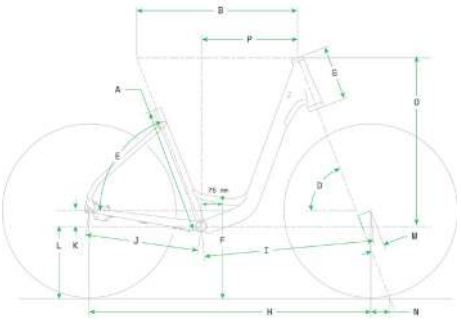

Bad Boy

	SM	MD	LG	XL
A **Seat Tube Length (cm)**	45.0	49.0	52.5	55.0
B **Top Tube Horizontal (cm)**	56.0	59.2	61.8	65.0
C **Top Tube Actual (cm)**	NA	NA	NA	NA
D **Head Tube Angle**	70°	70°	70°	70°
E **Seat Tube Angle**	73.5°	73.5°	73.5°	73.5°
F **Standover (cm)**	76.2	79.2	83.3	85.8
G **Head Tube Length (cm)**	16.0	16.0	18.0	18.0
H **Wheelbase (cm)**	103.6	107.0	109.9	113.3
I **Front Center (cm)**	60.6	64.0	66.9	70.3
J **Chain Stay Length (cm)**	43.5	43.5	43.5	43.5
K **Bottom Bracket Drop (cm)**	5.3	5.3	5.3	5.3
L **Bottom Bracket Height (cm)**	28.0	28.0	28.0	28.0
M **Fork Rake (cm)**	2.2	2.2	2.2	2.2
N **Trail (cm)**	9.9	9.9	9.9	9.9
O **Stack (cm)**	58.9	61.8	66.0	68.8
P **Reach (cm)**	38.6	40.9	42.3	44.6

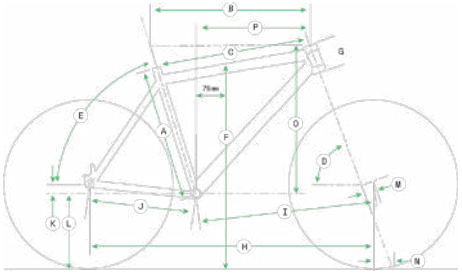



Electric

E-URBAN

E-TOURING

E-FITNESS

E-ROAD

E-MOUNTAIN

E-Bike

E-Mountain


Moterra Neo LT


Moterra Neo


Habit Neo


Trail Neo

E-Road


SuperSix EVO Neo


Topstone Neo Carbon


Topstone Neo


Topstone Neo SL

E-Fitness


Treadwell Neo

E-Urban


Mavaro Neo


Adventure Neo


Moterra Neo EQ

E-Touring


Tesoro Neo X


Tesoro Neo SL

Moterra Neo Carbon LT 1

Color 1 - Quicksand

NEW INNOVATION

* Until further notice

EMBARGO



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C25452U

Frame	Moterra Neo Carbon Front Triangle, SmartForm C1 Alloy Swingarm, 160mm travel, Proportional Response Tuned Suspension, removable downtube battery, alloy skid plate, 55mm chainline, internal cable routing, 148×12mm thru-axle, UDH hanger, post mount brake, 1.5" – 1.8" tapered headtube, 18mm two-bolt kickstand mount
Fork	RockShox Zeb Select +, Charger RC, 170mm, DebonAir, 15×110mm, 51mm offset
Rear Shock	RockShox Deluxe Select+, Coil, 2-Pos mode adjust, adjustable rebound
Drive Unit	Bosch Performance Line CX 250W
Battery	Bosch PowerTube 750Wh
Display	Bosch Kiox 300 w/ LED remote
Charger	Bosch 4A
Rims	WTB KOM Trail i30 TCS, 32h, tubeless ready
Hubs	(F) Formula 15×110mm thru-axle / (R) DT Swiss, 12×148mm thru-axle
Spokes	DT Swiss Champion
Tires	(F) Maxxis Assegai, 29 × 2.6", 3C, EXO+, tubeless ready, (R) Maxxis DHR II, 27.5 x 2.6", 3C, EXO+, tubeless ready
Pedals	Not included
Crank	FSA Bosch E-bike w/ 55mm chainline, 160mm, 34T
Chain	Shimano XT, 12-speed
Rear Cogs	Shimano XT, 10-51, 12-speed
Rear Derailleur	Shimano XT
Shifters	Shimano XT, 12-speed
Handlebar	HollowGram SAVE riser bar, Carbon, 35mm clamp, 30mm rise, 8° sweep, 5° rise, 780mm
Grips	Fabric FunGuy
Stem	Cannondale 2, 6061 Alloy, 35mm, 0°
Headset	Acros integrated sealed bearing, tapered
Brakes	SRAM Code RSC hydraulic disc, 4-piston, CenterLine 220/200mm rotors
Brake Levers	SRAM Code RSC hydraulic disc
Saddle	Fabric Magic Elite Saddle, cro-mo rails
Seatpost	Cannondale DownLow Dropper, internal routing, 31.6, 125mm (S), 150mm (M), 170mm (L-XL)
Connectivity	Cannondale Wheel Sensor
Sizes	SM,MD,LG,XL
Color 1	Quicksand (QSD)
Extras	Lezyne Super HB STVZO E1000 w/ remote high beam switch

Moterra Neo Carbon LT 2

Color 1 - Black

Color 2 - Cool Mint



NEW INNOVATION

* Until further notice

EMBARGO



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C25552U

Frame	Moterra Neo Carbon Front Triangle, SmartForm C1 Alloy Swingarm, 160mm travel, Proportional Response Tuned Suspension, removable downtube battery, alloy skid plate, 55mm chainline, internal cable routing, 148×12mm thru-axle, UDH hanger, post mount brake, 1.5" – 1.8" tapered headtube, 18mm two-bolt kickstand mount
Fork	RockShox Zeb Select, Charger RC, 170mm, DebonAir, 15×110mm, 51mm offset
Rear Shock	RockShox Deluxe Select+, Coil, 2-Pos mode adjust, adjustable rebound
Drive Unit	Bosch Performance Line CX 250W
Battery	Bosch PowerTube 750Wh
Display	Bosch Kiox 300 w/ LED remote
Charger	Bosch 4A
Rims	WTB ST i30 TCS, 32h, tubeless ready
Hubs	(F) Formula 15×110mm thru-axle / (R) Shimano MT410, 12×148mm thru-axle
Spokes	Stainless Steel, 14g
Tires	(F) Maxxis Assegai, 29 × 2.6", 3C, EXO+, tubeless ready, (R) Maxxis DHR II, 27.5 x 2.6", 3C, EXO+, tubeless ready
Pedals	Not included
Crank	FSA Bosch E-bike w/ 55mm chainline, 160mm, 34T
Chain	Shimano SLX, 12-speed
Rear Cogs	Shimano SLX, 10-51, 12-speed
Rear Derailleur	Shimano XT
Shifters	Shimano SLX, 12-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 25mm rise, 8° sweep, 5° rise, 800mm
Grips	Fabric FunGuy
Stem	Cannondale 2, 6061 Alloy, 35mm, 0°
Headset	Acros integrated sealed bearing, tapered
Brakes	Magura MT5 4-piston hydraulic disc, Magura MDR-P 220/203mm, 6-bolt rotors
Brake Levers	Magura MT5 Trail HC hydraulic disc
Saddle	Fabric Scoop Shallow Sport, steel rails
Seatpost	Cannondale DownLow Dropper, internal routing, 31.6, 125mm (S), 150mm (M), 170mm (L-XL)
Connectivity	Cannondale Wheel Sensor
Sizes	SM,MD,LG,XL
Color 1	Black (BBQ)
Color 2	Cool Mint (CMT)
Extras	Pre-installed light cable

Moterra Neo Carbon 1

Color 1 - Abyss

Color 2 - Orange



NEW INNOVATION

* Until further notice



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C25152U

Frame	Moterra Neo Carbon Front Triangle, SmartForm C1 Alloy Swingarm, 150mm travel, Proportional Response Tuned Suspension, removable downtube battery, alloy skid plate, 55mm chainline, internal cable routing, 148×12mm thru-axle, UDH hanger, post mount brake, 1.5" – 1.8" tapered headtube, 18mm two-bolt kickstand mount
Fork	RockShox Lyrik Select+, 150mm, DebonAir, 15×110mm thru-axle, tapered steered, 42mm offset
Rear Shock	RockShox Deluxe Select+, DebonAir, 2-Pos mode adjust, adjustable rebound
Drive Unit	Bosch Performance Line CX 250W
Battery	Bosch PowerTube 750Wh
Display	Bosch Kiox 300 w/ LED remote
Charger	Bosch 4A
Rims	WTB KOM Trail i30 TCS, 32h, tubeless ready
Hubs	(F) Formula 15×110mm thru-axle / (R) DT Swiss, 12×148mm thru-axle
Spokes	DT Swiss Champion
Tires	(F) Maxxis Minion DHF, 29 × 2.6", EXO, tubeless ready / (R) Maxxis Rekon, 29 × 2.6", EXO, tubeless ready
Pedals	Not included
Crank	FSA Bosch E-bike w/ 55mm chainline, 160mm, 34T
Chain	Shimano XT, 12-speed
Rear Cogs	Shimano XT, 10-51, 12-speed
Rear Derailleur	Shimano XTR
Shifters	Shimano XT, 12-speed
Handlebar	HollowGram SAVE riser bar, Carbon, 35mm clamp, 30mm rise, 8° sweep, 5° rise, 780mm
Grips	Fabric FunGuy
Stem	Cannondale 2, 6061 Alloy, 35mm, 0°
Headset	Acros integrated sealed bearing, tapered
Brakes	Shimano XT 8120 4-piston hydraulic disc, 203/203mm RT76 rotors
Brake Levers	Shimano XT hydraulic disc
Saddle	Fabric Scoop Shallow Elite, cro-mo rails
Seatpost	Cannondale DownLow Dropper, internal routing, 31.6, 125mm (S), 150mm (M-XL)
Connectivity	Cannondale Wheel Sensor
Sizes	SM,MD,LG,XL
Color 1	Abyss (ABB)
Color 2	Orange (ORG)
Extras	Lezyne Super HB STVZO E1000 w/ remote high beam switch

Moterra Neo Carbon 2

Color 1 - Mantis

Color 2 - Highlighter



NEW INNOVATION

* Until further notice



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C25252U

Frame	Moterra Neo Carbon Front Triangle, SmartForm C1 Alloy Swingarm, 150mm travel, Proportional Response Tuned Suspension, removable downtube battery, alloy skid plate, 55mm chainline, internal cable routing, 148×12mm thru-axle, UDH hanger, post mount brake, 1.5" – 1.8" tapered headtube, 18mm two-bolt kickstand mount
Fork	RockShox Lyrik Select, 150mm, DebonAir, 15×110mm thru-axle, tapered steered, 42mm offset
Rear Shock	RockShox Deluxe Select+, DebonAir, 2-Pos mode adjust, adjustable rebound
Drive Unit	Bosch Performance Line CX 250W
Battery	Bosch PowerTube 750Wh
Display	Bosch Kiox 300 w/ LED remote
Charger	Bosch 4A
Rims	WTB ST i30 TCS, 32h, tubeless ready
Hubs	(F) Formula 15×110mm thru-axle / (R) Shimano MT410, 12×148mm thru-axle
Spokes	DT Swiss Champion
Tires	(F) Maxxis Minion DHF, 29 × 2.6", EXO, tubeless ready / (R) Maxxis Rekon, 29 × 2.6", EXO, tubeless ready
Pedals	Not included
Crank	FSA Bosch E-bike w/ 55mm chainline, 160mm, 34T
Chain	Shimano SLX, 12-speed
Rear Cogs	Shimano SLX, 10-51, 12-speed
Rear Derailleur	Shimano XT
Shifters	Shimano SLX, 12-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 25mm rise, 8° sweep, 5° rise, 800mm
Grips	Fabric FunGuy
Stem	Cannondale 2, 6061 Alloy, 35mm, 0°
Headset	Acros integrated sealed bearing, tapered
Brakes	Shimano MT520 4-piston hydraulic disc, 203/203mm RT64 rotors
Brake Levers	Shimano MT501 hydraulic disc
Saddle	Fabric Scoop Shallow Sport, steel rails
Seatpost	Cannondale DownLow Dropper, internal routing, 31.6, 125mm (S), 150mm (M-XL)
Connectivity	Cannondale Wheel Sensor
Sizes	SM,MD,LG,XL
Color 1	Mantis (MAT)
Color 2	Highlighter (HLT)
Extras	Pre-installed light cable

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Moterra Neo 3

Color 1 - Deep Teal

Color 2 - Mercury



NEW INNOVATION

* Until further notice



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C65331U

Frame	Moterra Neo, SmartForm C1 Alloy, 150mm travel, Proportional Response Tuned Suspension, removable downtube battery, injection molded skid plate, 55mm chainline, internal cable routing, 148×12mm thru-axle, UDH hanger, post mount brake, tapered headtube, 18mm two-bolt kickstand mount, integrated rear rack mounts
Fork	RockShox Yari RC, 150mm, 15×110mm Boost, 42mm offset
Rear Shock	RockShox Deluxe Select, DebonAir, 2-Pos mode adjust, adjustable rebound
Drive Unit	Bosch Performance Line CX 250W
Battery	Bosch PowerTube 750Wh
Display	Bosch Kiox 300 w/ LED remote
Charger	Bosch 4A
Rims	WTB ST i30 TCS, 32h, tubeless ready
Hubs	(F) Formula 15×110mm thru-axle / (R) Shimano MT410, 12×148mm thru-axle
Spokes	Stainless Steel, 14g
Tires	(F) Maxxis Minion DHF, 29 × 2.6", EXO, tubeless ready / (R) Maxxis Rekon, 29 × 2.6", EXO, tubeless ready
Pedals	Not included
Crank	FSA Bosch E-bike w/ 55mm chainline, 160mm, 34T
Chain	Shimano Deore 6100, 12-speed
Rear Cogs	Shimano Deore M6100, 10-51, 12-speed
Rear Derailleur	Shimano XT
Shifters	Shimano Deore M6100, 12-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
Grips	Fabric FunGuy
Stem	Cannondale 3, 6061 Alloy, 31.8, 0°
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano MT420 4-piston hydraulic disc, 203/203mm rotors
Brake Levers	Shimano MT401 hydraulic disc
Saddle	Fabric Scoop Shallow Sport, steel rails
Seatpost	TranzX dropper, internal routing, 31.6, 120mm (XS-S), 130mm (M-XL)
Connectivity	Cannondale Wheel Sensor
Sizes	SM,MD,LG,XL
Color 1	Deep Teal (DTE)
Color 2	Mercury (MRC)
Extras	Pre-installed light cables

Moterra Neo 4

Color 1 - Gray with Impact Orange



Specifications

C65411U

Frame	Moterra Neo, SmartForm C1 Alloy, 150mm travel, SmartForm C2 Alloy, Cannondale Tuned Suspension, removable downtube battery, internal cable routing, 148×12mm thru-axle, post mount brake, tapered headtube
Fork	RockShox 35 Silver R, 150mm, Solo Air, 15×110mm stealth thru-axle, tapered steerer, 51mm offset
Rear Shock	RockShox Deluxe Select R, DebonAir
Drive Unit	Shimano EP8
Battery	Shimano BT-E8036, 630Wh
Display	Shimano SC-EM800, Bluetooth enabled
Charger	Shimano Battery Charger 2A
Rims	WTB STX i25 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle / (R) Shimano MT400, 12×148mm thru-axle
Spokes	Stainless steel, 14g
Tires	Maxxis Rekon, 29 × 2.6", 60TPI Exo
Pedals	Not included
Crank	FSA E-Bike, 165mm, SRAM Eagle, 34T Steel
Chain	SRAM SX Eagle, 12-speed
Rear Cogs	SRAM PG-1210, SX Eagle, 11-50, 12-speed
Rear Derailleur	SRAM SX Eagle
Shifters	SRAM NX Eagle, 12-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
Grips	Fabric Funguy
Stem	Cannondale 3, 3D Forged 6061 Alloy, 1-1/8", 31.8, 7°
Headset	Integrated Sealed Bearing, Tapered
Brakes	TRP Slate G4 4 Piston hydraulic disc, 200/200mm rotors
Brake Levers	TRP hydraulic disc
Saddle	Cannondale Ergo XC
Seatpost	TranzX dropper, internal routing, 31.6, 100mm (S), 120mm (M), 130mm (L-XL)
Connectivity	Cannondale Wheel Sensor
Sizes	SM, MD, LG, XL
Color 1	Gray with Impact Orange (IOR)
Extras	Pre-installed light cables

Moterra Neo S1

Color 1 - Gunmetal Green with Fine Silver

Color 2 - Rally Red with Jet Black



NEW INNOVATION

* Until further notice



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C65122U

Frame	150mm travel, SmartForm C2 Alloy, Cannondale Tuned Suspension, removable downtube battery, internal cable routing, 148×12mm thru-axle, post mount brake, tapered headtube
Fork	RockShox Lyrik Select +, 150mm, Solo Air, 15×110mm stealth thru-axle, tapered steerer, 51mm offset
Rear Shock	RockShox Deluxe Select +, DebonAir, 2-Pos mode adjust, adjustable rebound
Drive Unit	Shimano EP8
Battery	Shimano BT-E8036, 630Wh
Display	Shimano SC-EM800, Bluetooth enabled
Charger	Shimano Battery Charger 2A
Rims	WTB ST i30 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle / (R) Shimano MT400, 12×148mm thru-axle
Spokes	Stainless steel, 14g
Tires	(F) Maxxis Assegai, 29 × 2.6", 3C, EXO+, tubeless ready, (R) Maxxis DHR II, 27.5 x 2.6", 3C, EXO+, tubeless ready
Pedals	Not included
Crank	FSA E-Bike, 165mm, Shimano 12-speed, 34T

Chain	Shimano M6100 Hyperglide, 12-speed
Rear Cogs	Shimano Deore, Hyperglide, 10-51, 12-speed
Rear Derailleur	Shimano XT
Shifters	Shimano SLX 12-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
Grips	Fabric Funguy
Stem	Cannondale 3, 3D Forged 6061 Alloy, 1-1/8", 31.8, 7°
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano SLX 4-piston hydraulic disc, RT64 rotors 203mm/203mm
Brake Levers	Shimano SLX hydraulic disc
Saddle	Cannondale Ergo XC
Seatpost	Cannondale DownLow dropper, internal routing, 31.6, 125mm (S, M), 150mm (L-XL)
Connectivity	Cannondale Wheel Sensor
Sizes	SM, MD, LG, XL
Color 1	Gunmetal Green with Fine Silver (GMG)
Color 2	Rally Red with Jet Black (RRD)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Trail Neo 1

Color 1 - Mantis



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C61171M

Frame	SmartForm C1 Alloy, Dual Battery ready, removable downtube battery, SAVE, tapered headtube, internal cable routing, 148×12mm thru-axle, skid plate, rack/fender mounts
Fork	RockShox 35 Silver, 100mm, Coil, 15×110mm thru-axle, tapered steerer, 44mm offset
Drive Unit	Bosch Performance Line CX 250W
Battery	Bosch PowerTube 750Wh
Display	Bosch Kiox 300 w/ LED remote
Charger	Bosch 4A
Rims	WTB STX i30, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle / (R) Shimano MT510, 12×148mm thru-axle
Spokes	DT Swiss Chamption 2.0
Tires	Maxxis Rekon Race, 29 × 2.6", EXO Protection, tubeless ready
Pedals	Not Included
Crank	FSA for Bosch G4
Chain	Shimano Deore, 12-speed
Rear Cogs	Shimano Deore, 10-51, 12-speed
Rear Derailleur	Shimano Deore
Shifters	Shimano Deore M6100, 12-speed
Handlebar	Cannondale 2 Riser, 6061 Alloy, 35mm OD, 25mm rise, 8° sweep, 5° rise, 780mm
Grips	Fabric Funguy
Stem	Cannondale 2, 3D Forged 6061 Alloy, 1-1/8", 35, 0-degree
Headset	Integrated, 1-1/8 to 1.8", sealed angular contact bearings
Brakes	Shimano MT420 hydraulic disc brakes, 203/203 Deore Rotors
Brake Levers	Shimano MT420 hydraulic disc
Saddle	Fizik Freeway Fit
Seatpost	Cannondale 4, 6061 Alloy, 31.6 × 350mm
Sizes	SM, MD, LG, XL
Color 1	Mantis (MAT)
Extras	Pre-installed light cables

Trail Neo 2

Color 1 - Mantis



Specifications

C61251M

Frame	SmartForm C1 Alloy, Dual Battery ready, removable downtube battery, SAVE, tapered headtube, internal cable routing, Ai offset drivetrain, 148×12mm thru-axle, post mount disc, KickFlip hidden kickstand mount, skid plate, rack/fender mounts
Fork	RockShox Judy Gold, 100mm, 51mm offset, 110×15
Drive Unit	Bosch Performance Line Sport 250W
Battery	Bosch PowerTube 625Wh
Display	Bosch Purion
Charger	Bosch 2A
Rims	WTB STX i30 TCS, 32h tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle / (R) Shimano MT400, 12×148mm thru-axle
Spokes	DT Swiss Champion
Tires	Maxxis Rekon, 27.5/29 × 2.6", Wire 60TPI Exo
Pedals	Not included
Crank	FSA Bosch E-Bike w/ custom Ai offset, 34T
Chain	Shimano HG54, 10-Speed
Rear Cogs	Shimano Deore, 11-42, 10-Speed
Rear Derailleur	Shimano Deore M4100
Shifters	Shimano Deore M4100, 10-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
Grips	Fabric Funguy
Stem	Cannondale 3, 6061 Alloy, 31.8, 0°
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano MT400 hydraulic disc, 180mm RT30 rotors
Brake Levers	Shimano MT400 hydraulic disc
Saddle	Cannondale Ergo XC
Seatpost	Cannondale 4, 6061 Alloy, 31.6 × 350mm
Sizes	SM, MD, LG, XL
Color 1	Mantis (MAT)
Extras	Pre-installed light cables

Trail Neo 3

Color 1 - Jet Black



Specifications

C61351M

Frame	SmartForm C1 Alloy, Dual Battery ready, removable downtube battery, SAVE, tapered headtube, internal cable routing, Ai offset drivetrain, 148×12mm thru-axle, post mount disc, KickFlip hidden kickstand mount, skid plate, rack/fender mounts
Fork	SR Suntour XCM 34 Boost, 100mm, Coil, 46mm offset
Drive Unit	Bosch Performance Line CX
Battery	Bosch Powertube 500Wh
Display	Bosch Purion
Charger	Bosch 2A
Rims	WTB STX i25 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle / (R) Shimano MT400, 12×148mm thru-axle
Spokes	DT Swiss Champion
Tires	Maxxis Ardent, 27.5/29 × 2.4", Wire 60TPI Exo
Pedals	Not included

Crank	FSA Bosch E-Bike w/ custom Ai offset, 34T
Chain	Shimano HG54, 10-Speed
Rear Cogs	Shimano Deore, 11-42, 10-Speed
Rear Derailleur	Shimano Deore M4100
Shifters	Shimano Deore M4100, 10-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
Grips	Fabric Funguy
Stem	Cannondale 3, 6061 Alloy, 31.8, 0°
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano MT200 hydraulic disc, 180mm RT10 rotors
Brake Levers	Shimano MT200 hydraulic disc
Saddle	Cannondale Ergo XC
Seatpost	Cannondale 4, 6061 Alloy, 31.6 × 350mm
Sizes	SM, MD, LG, XL
Color 1	Jet Black (BLK)
Extras	Pre-installed light cables

Trail Neo 3 Remixte

Color 1 - Black



Specifications

C61301U

Frame	SmartForm C1 Alloy, Low-step Ride-Easy geometry, removable downtube battery, SAVE, tapered headtube, internal cable routing, Ai offset drivetrain, 148×12mm thru-axle, post mount disc, KickFlip hidden kickstand mount, skid plate, rack/fender mounts
Fork	SR Suntour XCM 34 Boost, 100mm, Coil, 46mm offset
Drive Unit	Bosch Performance Line CX
Battery	Bosch Powertube 500Wh
Display	Bosch Purion
Charger	Bosch 2A
Rims	WTB STX i25 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle / (R) Shimano MT400, 12×148mm thru-axle
Spokes	DT Swiss Champion
Tires	Maxxis Ardent, 29 × 2.4", Wire 60TPI Exo
Pedals	Not included

Crank	FSA Bosch E-Bike w/ custom Ai offset, 34T
Chain	Shimano HG54, 10-Speed
Rear Cogs	Shimano Deore, 11-42, 10-Speed
Rear Derailleur	Shimano Deore M4100
Shifters	Shimano Deore M4100, 10-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
Grips	Fabric Funguy
Stem	Cannondale 3, 6061 Alloy, 31.8, 0°
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano MT200 hydraulic disc, 180/180mm RT10 rotors
Brake Levers	Shimano MT200 hydraulic disc
Saddle	Cannondale Ergo XC
Seatpost	Cannondale 4, 6061 Alloy, 31.6 × 350mm
Sizes	SM, MD, LG
Color 1	Black (BLK)
Extras	Pre-installed light cables

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Trail Neo 3

Color 1 - Hazard Orange

Specifications

C61303U

Frame	SmartForm C1 Alloy, Dual Battery ready, removable downtube battery, SAVE, tapered headtube, internal cable routing, Ai offset drivetrain, 148×12mm thru-axle, post mount disc, KickFlip hidden kickstand mount, skid plate, rack/fender mounts
Fork	SR Suntour XCM 34 Boost, 100mm, Coil, 46mm offset
Drive Unit	Bosch Performance Line CX
Battery	Bosch Powertube 500Wh
Display	Bosch Purion
Charger	Bosch 2A
Rims	WTB STX i25 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle / (R) Shimano MT400, 12×148mm thru-axle
Spokes	DT Swiss Champion
Tires	Maxxis Ardent, 27.5/29 × 2.4", Wire 60TPI Exo
Pedals	Not included
Crank	FSA Bosch E-Bike w/ custom Ai offset, 34T
Chain	Shimano HG54, 10-Speed
Rear Cogs	Shimano Deore, 11-42, 10-Speed
Rear Derailleur	Shimano Deore M4100
Shifters	Shimano Deore M4100, 10-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
Grips	Fabric Funguy
Stem	Cannondale 3, 6061 Alloy, 31.8, 0°
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano MT200 hydraulic disc, 180mm RT10 rotors
Brake Levers	Shimano MT200 hydraulic disc
Saddle	Cannondale Ergo XC
Seatpost	Cannondale 4, 6061 Alloy, 31.6 × 350mm
Sizes	SM, MD, LG, XL
Color 1	Jet Black (BLK)
Extras	Pre-installed light cables

Trail Neo 4

Color 1 - Highlighter



Specifications

C61451M

Frame	SmartForm C2 Alloy, removable downtube battery, SAVE, tapered headtube, internal cable routing, 148×12mm thru-axle, post mount disc, folding lock mount, rack/ fender mounts, Si kickstand mount
Fork	SR Suntour XCM, 100mm, coil, 46mm offset
Drive Unit	Bosch Performance Line Cruise
Battery	Bosch PowerTube 500Wh
Display	Bosch Purion
Charger	Bosch 2A
Rims	WTB STX i25 TCS, 32h, tubeless ready
Hubs	(F) Shimano HB M4050 / (R) Shimano MT400, 12×148mm thru-axle
Spokes	DT Swiss Champion
Tires	Maxxis Ardent, 29 × 2.4", Wire 60TPI Exo
Pedals	Not included
Crank	FSA Bosch E-Bike, 34T
Chain	Shimano HG93A, 9-speed
Rear Cogs	Shimano HG200, 11-36, 9-speed
Rear Derailleur	Shimano Alivio, 9-speed
Shifters	Shimano Alivio, 9-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
Grips	Fabric Funguy
Stem	Cannondale 3, 6061 Alloy, 31.8, 0°
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano MT200 hydraulic disc, 180/180mm RT10 rotors
Brake Levers	Shimano MT200 hydraulic disc
Saddle	Cannondale Ergo XC
Seatpost	Cannondale 4, 6061 Alloy, 31.6 × 350mm
Connectivity	Cannondale Wheel Sensor
Sizes	SM, MD, LG, XL
Color 1	Highlighter (HLT)
Extras	Pre-installed light cables

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Trail Neo 4

Color 1 - Quicksand

Specifications

C61403U

Frame	SmartForm C1 Alloy, Dual Battery ready, removable downtube battery, SAVE, tapered headtube, internal cable routing, Ai offset drivetrain, 148×12mm thru-axle, post mount disc, KickFlip hidden kickstand mount, skid plate, rack/fender mounts
Fork	SR Suntour XCM 34 Boost, 100mm, Coil, 46mm offset
Drive Unit	Bosch Performance Line CX
Battery	Bosch Powertube 500Wh
Display	Bosch Purion
Charger	Bosch 2A
Rims	WTB STX i25 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle / (R) Shimano MT400, 12×148mm thru-axle
Spokes	DT Swiss Champion
Tires	Maxxis Ardent, 27.5/29 × 2.4", Wire 60TPI Exo
Pedals	Not included

Crank	FSA Bosch E-Bike w/ custom Ai offset, 34T
Chain	Shimano HG54, 10-Speed
Rear Cogs	Shimano Deore, 11-42, 10-Speed
Rear Derailleur	Shimano Deore M4100
Shifters	Shimano Deore M4100, 10-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 780mm
Grips	Fabric Funguy
Stem	Cannondale 3, 6061 Alloy, 31.8, 0°
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano MT200 hydraulic disc, 180mm RT10 rotors
Brake Levers	Shimano MT200 hydraulic disc
Saddle	Cannondale Ergo XC
Seatpost	Cannondale 4, 6061 Alloy, 31.6 × 350mm
Sizes	SM, MD, LG, XL
Color 1	Jet Black (BLK)
Extras	Pre-installed light cables

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

SuperSix EVO Neo 2

Color 1 - Stealth Grey



Specifications

C66251U

Frame	SuperSix EVO Neo Carbon, internal downtube battery, integrated cable routing w/ Switchplate, dropout/axle spacing 135mm, SAVE, T47, flat mount disc, integrated seat binder
Fork	SuperSix EVO Neo Carbon, SAVE, 1-1/8" to 1-1/4" steerer, integrated crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing, 55mm offset (S-M) 45mm offset (L)
Drive Unit	Mahle ebikemotion X35 250W
Battery	Mahle ebikemotion X35 250Wh
Display	Mahle ebikemotion iWoc ONE integrated controller
Charger	Mahle ebikemotion X35
Rims	Cannondale RDe 1.0 , 28h front, 32h rear
Hubs	(F) Formula RX-812, 12×100mm disc / (R) ebikemotion X35 250W disc
Spokes	(F) Stainless Steel, 14g / (R) 13g
Tires	Vittoria Rubino Pro Bright Black, 700 × 28c
Pedals	Not included
Crank	HollowGram, T47, OPI SpideRing, 50/34
Bottom Bracket	FSA T47 MegaEvo, threaded
Chain	Shimano HG701, 11-speed
Rear Cogs	Shimano Ultegra, 11-34, 11-speed
Front Derailleur	Shimano Ultegra Di2, braze-on
Rear Derailleur	Shimano Ultegra Di2 GS
Shifters	Shimano Ultegra Di2, 11-speed
Handlebar	HollowGram SystemBar SAVE, Carbon, 8 deg. pitch adjust
Grips	Cannondale Bar Tape, 3.5mm
Stem	HollowGram KNØT, Alloy w/ cable cover, -6°
Headset	Integrated, 1-1/8" to 1-1/4" (S, M), 1-1/8" to 1-3/8" (L)
Brakes	Shimano Ultegra Di2 hydraulic disc, 160/160mm RT66 rotors
Brake Levers	Shimano Ultegra Di2 hydraulic disc
Saddle	Fizik Tempo Argo R5, 150mm width, S-Alloy rails
Seatpost	HollowGram 27 SL KNØT, Carbon, 2 bolt clamp, 330mm, 15mm offset
Connectivity	Cannondale Wheel Sensor
Sizes	SM, MD, LG
Color 1	Stealth Grey (SGY)

SuperSix EVO Neo 3

Color 1 - Black Pearl



Specifications

C66350M

Frame	SuperSix EVO Neo Carbon, internal downtube battery, integrated cable routing w/ Switchplate, dropout/axle spacing 135mm, SAVE, T47, flat mount disc, integrated seat binder
Fork	SuperSix EVO Neo Carbon, SAVE, 1-1/8" to 1-1/4" steerer, integrated crown race, 12×100mm Speed Release thru-axle, flat mount disc, internal routing, 55mm offset (S-M) 45mm offset (L)
Drive Unit	Mahle ebikemotion X35 250W
Battery	Mahle ebikemotion X35 250Wh
Display	Mahle ebikemotion iWoc ONE integrated controller
Charger	Mahle ebikemotion X35
Rims	Cannondale RDe 1.0 , 28h front, 32h rear
Hubs	(F) Formula CL-712, 12×100mm disc / (R) ebikemotion X35 250W disc
Spokes	(F) Stainless Steel, 14g / (R) 13g
Tires	Vittoria Rubino Pro Bright Black, 700 × 28c
Pedals	Not Included
Crank	Cannondale 1 w/ FSA rings, 50/34
Bottom Bracket	FSA T47 MegaEvo, threaded
Chain	Shimano HG601, 11-speed
Rear Cogs	Shimano 105, 11-34, 11-speed
Front Derailleur	Shimano 105, braze-on
Rear Derailleur	Shimano 105 GS
Shifters	Shimano 105 hydraulic disc, 11-speed
Handlebar	Cannondale 3, 6061 alloy, Compact
Grips	Cannondale Bar Tape, 3.5mm
Stem	Cannondale 3, 6061 Alloy, 7-degree
Headset	Integrated, 1-1/8" to 1-1/4" (S, M), 1-1/8" to 1-3/8" (L)
Brakes	Shimano 105 hydraulic disc, 160/160mm RT56 rotors
Brake Levers	Shimano 105 hydraulic disc
Saddle	Fizik Aliante Delta, S-alloy rails
Seatpost	HollowGram 27 KNØT, Alloy, 2 bolt clamp, 330mm, 15mm offset
Connectivity	Cannondale Wheel Sensor
Sizes	SM, MD, LG
Color 1	Black Pearl (BPL)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Topstone Neo Carbon 4

Color 1 - Midnight



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C62251M

Frame	Topstone Neo Carbon Frame, removable downtube battery, Kingpin suspension system, 12×148 thru-axle, dropper post compatible
Fork	Topstone Neo Carbon, 1-1/8" to 1.5" steerer, 55mm OutFront offset, flat mount disc, internal routing, 12×110 thru axle
Drive Unit	Bosch Performance Line CX 250W
Battery	Bosch PowerTube 500Wh
Display	Bosch Purion
Charger	Bosch 4A
Rims	WTB ST TCS i23 28h, tubeless ready
Hubs	(F) Formula cartridge bearing, Centerlock, 12×110mm thru-axle / (R) Shimano MT400, Centerlock, 12×148mm thru-axle
Spokes	Stainless Steel, 14g
Tires	WTB Riddler Comp, 700 × 37c
Pedals	Not included
Crank	FSA Bosch E-Bike, 48/32T
Chain	KMC X10EL, 10-speed
Rear Cogs	Shimano HG500, 11-34, 10-speed
Front Derailleur	Shimano GRX 400, braze-on
Rear Derailleur	Shimano GRX 400, Shadow RD+
Shifters	Shimano GRX 400, 2×10
Handlebar	Cannondale 3, butted 6061 alloy, 16 deg flare drop
Grips	Cannondale Bar Tape, 3.5mm
Stem	Cannondale 2, 6061 Alloy, 31.8, 7°
Headset	Integrated, 1.5" lower to 1-1/8" upper, 25mm Alloy top cap
Brakes	Shimano GRX hydraulic disc, 160/160mm RT54 rotors
Brake Levers	Shimano GRX hydraulic disc
Saddle	Fizik Aliante Delta, S-alloy rails
Seatpost	Promax SP-2032, Alloy, 27.2
Sizes	SM, MD, LG, XL
Color 1	Midnight (MDN)
Extras	Removable fender bridge

Topstone Neo SL 1

Color 1 - Agave



Specifications

C62301M

Frame	SmartForm C2 Alloy, 135mm bolt-on drop out, tapered headtube, flat mount disc, multiple gear/bottle mounts
Fork	Full Carbon, 1-1/8" to 1.5" steerer, 55mm OutFront offset, flat mount disc, internal routing, 12×100 speed release thru axle
Drive Unit	Mahle ebikemotion X35+ 250W
Battery	Mahle ebikemotion X35 250Wh
Display	Mahle ebikemotion iWoc ONE integrated controller
Charger	Mahle ebikemotion X35
Rims	Cannondale Disc, double wall, tubeless ready 32h (R) / 28h (F)
Hubs	(F) Formula CRX-512, 12×100mm thru-axle / (R) EbikeMotion X35+
Spokes	Stainless Steel, 13g
Tires	WTB Resolute TCS, 700 × 42c, tubeless ready
Pedals	Not included
Crank	Shimano GRX 600, 40T
Bottom Bracket	Shimano BSA Sealed
Chain	Shimano HG601, 11-speed
Rear Cogs	Shimano SLX, 11-42, 11-speed
Rear Derailleur	Shimano GRX 812, Shadow RD+
Shifters	Shimano GRX 600, 11-speed
Handlebar	Cannondale 3, butted 6061 alloy, 16 deg flare drop
Grips	Cannondale Bar Tape, 3.5mm
Stem	Cannondale 3, 6061 Alloy, 31.8, 7°
Headset	Integrated, 1.5" lower to 1-1/8" upper, 25mm Alloy top cap
Brakes	Shimano GRX 400 hydraulic disc, 160/160mm RT56 rotors
Brake Levers	Shimano GRX 600 hydraulic disc
Saddle	Fizik Aliante Delta, S-alloy rails
Seatpost	Promax SP-2032, Carbon, 27.2
Sizes	SM, MD, LG, XL
Color 1	Agave (AGV)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Topstone Neo SL 2

Color 1 - Graphite



Specifications

C62401M

Frame	SmartForm C2 Alloy, 135mm bolt-on drop out, tapered headtube, flat mount disc, multiple gear/bottle mounts
Fork	Full Carbon, 1-1/8" to 1.5" steerer, 55mm OutFront offset, flat mount disc, internal routing, 12×100 speed release thru axle
Drive Unit	Mahle ebikemotion X35+ 250W
Battery	Mahle ebikemotion X35 250Wh
Display	Mahle ebikemotion iWoc ONE integrated controller
Charger	Mahle ebikemotion X35
Rims	Cannondale Disc, double wall, tubeless ready 32h (R) / 28h (F)
Hubs	(F) Formula CRX-512, 12×100mm thru-axle / (R) EbikeMotion X35+
Spokes	Stainless Steel, 13g
Tires	WTB Resolute Comp, 700 × 42c, tubeless ready
Pedals	Not included
Crank	Shimano GRX 600, 46/30
Bottom Bracket	Shimano BSA Sealed

Chain	Shimano Deore, 10-speed
Rear Cogs	Shimano HG500, 11-34, 10-speed
Front Derailleur	Shimano GRX 400, braze-on w/ band clamp adapter
Rear Derailleur	Shimano GRX 400, Shadow RD+
Shifters	Shimano GRX 400, 10-speed
Handlebar	Cannondale 3, butted 6061 alloy, 16 deg flare drop
Grips	Cannondale Bar Tape, 3.5mm
Stem	Cannondale 2, 6061 Alloy, 31.8, 7°
Headset	Integrated, 1.5" lower to 1-1/8" upper, 25mm Alloy top cap
Brakes	Shimano GRX 400 hydraulic disc, 160/160mm RT56 rotors
Brake Levers	Shimano GRX 400 hydraulic disc
Saddle	Fizik Aliante Delta, S-alloy rails
Seatpost	Promax SP-9032, Alloy, 27.2
Sizes	SM, MD, LG, XL
Color 1	Graphite (GRA)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Treadwell Neo 2 EQ

Color 1 - Charcoal Gray

Color 2 - Purple Haze





Specifications

C63302U

Frame	SmartForm C3 Alloy, low standover Ride-Easy geometry, internal downtube battery, hidden cable routing, Urban Armor frame bumpers, flat mount disc, rack/ fender mounts, kickstand mount
Fork	SmartForm C3 Alloy blades, 1-1/8" steerer, OutFront offset, flat mount disc, mid-blade rack/fender mounts
Drive Unit	Hydrive MRC-250, 250W rear hub motor
Battery	Hydrive 250Wh internal downtube battery
Display	Handlebar-mounted Hydrive HMI, smartphone app with Intellimount stem
Charger	Hydrive 2A
Rims	Cannondale Disc, double wall w/eyelet, 32h
Hubs	(F) Sealed Alloy Disc, QR / (R) Hydrive MRC-250 250W
Spokes	Stainless Steel, 14g
Tires	Maxxis DTR-1, 650b x 47c
Pedals	Cannondale Comfort
Crank	Samox, 38T
Bottom Bracket	Hydrive torque sensor
Chain	KMC X8, 8-speed
Rear Cogs	Sunrace, 11-34, 8-speed
Rear Derailleur	microSHIFT M26S
Shifters	microSHIFT, 8-speed
Handlebar	Cannondale Cruise Control riser, 6061 Alloy, 31.8mm, 15° back, 740mm
Grips	Cannondale Comfort
Stem	Cannondale 3 with Intellimount with high direct light mount, Alloy, 31.8mm clamp
Headset	FSA, Alloy, 1-1/8" Ahead, semi-integrated
Brakes	Tektro HD-R280 hydraulic disc, 160/160mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Treadwell, 170mm, steel rails
Seatpost	Cannondale, 6061 Alloy, 31.6 × 400mm
Connectivity	Cannondale Wheel Sensor
Sizes	SM, MD, LG
Color 1	Charcoal Gray (GRY)
Color 2	Purple Haze (PRH)
Extras	Herrmans H-Black MR4 front light / Herrmans H-trace rear light, fenders, front rack (10kg max capacity), kickstand

Treadwell Neo 2 EQ Remixte

Color 1 - Charcoal Gray

Color 2 - Purple Haze





Specifications

C63352U

Frame	SmartForm C3 Alloy, low-step Ride-Easy geometry, internal downtube battery, hidden cable routing, Urban Armor frame bumpers, flat mount disc, rack/ fender mounts, kickstand mount
Fork	SmartForm C3 Alloy blades, 1-1/8" steerer, OutFront offset, flat mount disc, mid-blade rack/fender mounts
Drive Unit	Hydrive MRC-250, 250W rear hub motor
Battery	Hydrive 250Wh internal downtube battery
Display	Handlebar-mounted Hydrive HMI, smartphone app with Intellimount stem
Charger	Hydrive 2A
Rims	Cannondale Disc, double wall w/eyelet, 32h
Hubs	(F) Sealed Alloy Disc, QR / (R) Hydrive MRC-250 250W
Spokes	Stainless Steel, 14g
Tires	Maxxis DTR-1, 650b x 47c
Pedals	Cannondale Comfort
Crank	Samox, 38T
Bottom Bracket	Hydrive torque sensor
Chain	KMC X8, 8-speed
Rear Cogs	Sunrace, 11-34, 8-speed
Rear Derailleur	microSHIFT M26S
Shifters	microSHIFT, 8-speed
Handlebar	Cannondale Cruise Control riser, 6061 Alloy, 31.8mm, 15° back, 740mm
Grips	Cannondale Comfort
Stem	Cannondale 3 with Intellimount with high direct light mount, Alloy, 31.8mm clamp
Headset	FSA, Alloy, 1-1/8" Ahead, semi-integrated
Brakes	Tektro HD-R280 hydraulic disc, 160/160mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Treadwell, 170mm, steel rails
Seatpost	Cannondale, 6061 Alloy, 31.6 × 400mm
Connectivity	Cannondale Wheel Sensor
Sizes	SM, LG
Color 1	Charcoal Gray (GRY)
Color 2	Purple Haze (PRH)
Extras	Herrmans H-Black MR4 front light / Herrmans H-trace rear light, fenders, front rack (10kg max capacity), kickstand

Treadwell Neo 2

Color 1 - Gunmetal Green



Specifications

C63402U

Frame	SmartForm C3 Alloy, low standover Ride-Easy geometry, internal downtube battery, hidden cable routing, Urban Armor frame bumpers, flat mount disc, rack/ fender mounts, kickstand mount
Fork	Chromoly, 1-1/8" steerer, OutFront offset, mid-blade mounts
Drive Unit	Hydrive MRC-250, 250W rear hub motor
Battery	Hydrive 250Wh internal downtube battery
Display	Handlebar-mounted Hydrive HMI, smartphone app with Intellimount stem
Charger	Hydrive 2A
Rims	Cannondale Disc, double wall w/eyelet, 32h
Hubs	(F) Sealed Alloy Disc, QR / (R) Hydrive MRC-250 250W
Spokes	Stainless Steel, 13g
Tires	Maxxis DTR-1, 650b x 47c
Pedals	Cannondale Comfort
Crank	Samox, 38T
Bottom Bracket	Hydrive torque sensor

Chain	KMC Z7, 7-speed
Rear Cogs	Sunrace, 11-34, 7-speed
Rear Derailleur	microSHIFT M26S
Shifters	microSHIFT, 7-speed
Handlebar	Cannondale Cruise Control riser, 6061 Alloy, 31.8mm, 15° back, 740mm
Grips	Cannondale Comfort
Stem	Cannondale 3 with Intellimount, Alloy, 31.8mm clamp
Headset	FSA, Alloy, 1-1/8" Ahead, semi-integrated
Brakes	Tektro Mechanical Disc, 160/160mm rotors
Brake Levers	Tektro
Saddle	Cannondale Treadwell, 170mm, steel rails
Seatpost	Cannondale, 6061 Alloy, 31.6 × 400mm
Connectivity	Cannondale Wheel Sensor
Sizes	SM, MD, LG
Color 1	Gunmetal Green (GMG)
Extras	Herrmans H-Trace rear light, Kickstand

Treadwell Neo 2 Remixte

Color 1 - Gunmetal Green



Specifications

C63452U

Frame	SmartForm C3 Alloy, low-step Ride-Easy geometry, internal downtube battery, hidden cable routing, Urban Armor frame bumpers, flat mount disc, rack/ fender mounts, kickstand mount
Fork	Chromoly, 1-1/8" steerer, OutFront offset, mid-blade mounts
Drive Unit	Hydrive MRC-250, 250W rear hub motor
Battery	Hydrive 250Wh internal downtube battery
Display	Handlebar-mounted Hydrive HMI, smartphone app with Intellimount stem
Charger	Hydrive 2A
Rims	Cannondale Disc, double wall w/eyelet, 32h
Hubs	(F) Sealed Alloy Disc, QR / (R) Hydrive MRC-250 250W
Spokes	Stainless Steel, 13g
Tires	Maxxis DTR-1, 650b x 47c
Pedals	Cannondale Comfort
Crank	Samox, 38T
Bottom Bracket	Hydrive torque sensor

Chain	KMC Z7, 7-speed
Rear Cogs	Sunrace, 11-34, 7-speed
Rear Derailleur	microSHIFT M26S
Shifters	microSHIFT, 7-speed
Handlebar	Cannondale Cruise Control riser, 6061 Alloy, 31.8mm, 15° back, 740mm
Grips	Cannondale Comfort
Stem	Cannondale 3 with Intellimount, Alloy, 31.8mm clamp
Headset	FSA, Alloy, 1-1/8" Ahead, semi-integrated
Brakes	Tektro Mechanical Disc, 160/160mm rotors
Brake Levers	Tektro
Saddle	Cannondale Treadwell, 170mm, steel rails
Seatpost	Cannondale, 6061 Alloy, 31.6 × 400mm
Connectivity	Cannondale Wheel Sensor
Sizes	SM, LG
Color 1	Gunmetal Green (GMG)
Extras	Herrmans H-Trace rear light, Kickstand

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Mavaro Neo 1

Color 1 - Barbecue



Specifications

C66112M

Frame	SmartForm C1 Alloy, removable 750Wh downtube battery, integrated front running light, tapered headtube, internal cable routing, 135mm QR hub spacing, IS disc mount, motor protection
Fork	All-New Cannondale HeadShok, 50mm travel, Quad Cage needle bearing internals, coil spring, twin chamber semi open-bath oil damping, post mount disc, 110×15mm thru-axle
Drive Unit	Bosch Performance Line CX 250W
Battery	Bosch PowerTube 750Wh
Display	Bosch Kiox 300 / LED remote
Charger	Bosch 4A
Rims	WTB STX i30 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle, (R) Enviolo Trekking, continuously variable transmission, wide range internal hub
Spokes	Stainless Steel, 14g
Tires	Continental Contact Cruiser, 29 x 2.2" 55-622 (M,L,XL), Contact Plus City 27.5 × 2.2" 55-584 (S)
Pedals	Cannondale Fitness
Crank	Gates Bosch E-bike, w/ 46T sprocket
Chain	Gates CDX high performance carbon drive belt
Rear Cogs	Gates CDX, 22T
Shifters	Enviolo Trekking stepless controller, twist style
Handlebar	Cannondale Urban Backsweep
Grips	Cannondale Ergo Fitness Dual Density, Lock-on
Stem	Cannondale Urban, adjustable, internal cable routing
Headset	Integrated Sealed Bearing, Tapered, internal cable routing
Brakes	Magura CT 2-piston hydraulic disc, MDR-C rotors, 203mm/180mm
Brake Levers	Magura CT hydraulic disc
Saddle	Selle Royale Essenza
Seatpost	Parallelogram Suspension Seatpost, 31.6, 300mm (SM), 350mm (MD), 400mm (LG, XL)
Sizes	SM, MD, LG, XL
Color 1	Barbecue (BBQ)
Extras	Garmin Varia Rear-facing radar, Integrated headtube running light, Tubus rear rack (25kg, Racktime compatible), Curana Apollo fenders, Axa Blueline 30 headlight / Blueline taillight), kickstand, Abus 4650X frame lock (key-matched with battery lock)

Mavaro Neo 1 Low Step-Thru

Color 1 - Candy Red

Color 2 - Barbecue



Specifications

C64112U

Frame	SmartForm C1 Alloy, low step-thru, removable 750Wh downtube battery, integrated front running light, tapered headtube, internal cable routing, 135mm QR hub spacing, IS disc mount, motor protection
Fork	All-New Cannondale HeadShok, 50mm travel, Quad Cage needle bearing internals, coil spring, twin chamber semi open-bath oil damping, post mount disc, 110×15mm thru-axle
Drive Unit	Bosch Performance Line CX 250W
Battery	Bosch Power Tube 750W
Display	Bosch Kiox 300 / LED remote
Charger	Bosch 4A
Rims	WTB STX i30 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle, (R) Enviolo Trekking, continuously variable transmission, wide range internal hub
Spokes	Stainless Steel, 14g
Tires	Continental Contact Cruiser, 29 × 2.2" 55-622 (L/XL), Urban Contact 27.5 × 2.2" 55-584 (S/M)
Pedals	Cannondale Fitness
Crank	Gates Bosch E-bike, w/ 46T sprocket
Chain	Gates CDX high performance carbon drive belt
Rear Cogs	Gates CDX, 22T
Shifters	Enviolo Trekking stepless controller, twist style
Handlebar	Cannondale Urban Backsweep
Grips	Cannondale Ergo Fitness Dual Density, Lock-on
Stem	Cannondale Urban, adjustable, internal cable routing
Headset	Integrated Sealed Bearing, Tapered, internal cable routing
Brakes	Magura CT 2-piston hydraulic disc, MDR-C rotors, 203mm/180mm
Brake Levers	Magura CT hydraulic disc
Saddle	Selle Royale Essenza
Seatpost	Parallelogram Suspension Seatpost, 31.6, 300mm (SM/MD), 400mm (LG/XL)
Sizes	S/M, L/XL
Color 1	Candy Red (CRD)
Color 2	Barbecue (BBQ)
Extras	Garmin Varia Rear-facing radar, Integrated headtube running light, Tubus rear rack (25kg, Racktime compatible), Curana Apollo fenders, Axa Blueline 30 headlight / Blueline taillight), kickstand, Abus 4650X frame lock (key-matched with battery lock)

Mavaro Neo 2

Color 1 - Mercury

Color 2 - Barbecue



NEW INNOVATION

* Until further notice



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

C64212U

Specifications

Frame	SmartForm C1 Alloy, removable 750Wh downtube battery, integrated front running light, tapered headtube, internal cable routing, 135mm QR hub spacing, IS disc mount, motor protection
Fork	All-New Cannondale HeadShok, 50mm travel, Quad Cage needle bearing internals, coil spring, twin chamber semi open-bath oil damping, post mount disc, 110×15mm thru-axle
Drive Unit	Bosch Performance Line CX 250W
Battery	Bosch Power Tube 750W
Display	Bosch Kiox 300 / LED remote
Charger	Bosch 4A
Rims	WTB STX i30 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle, (R) Nexus 5-speed internal gear hub
Spokes	Stainless Steel, 14g
Tires	Continental Contact Cruiser, 29 × 2.2" 55-622 (M,L,XL), Urban Contact 27.5 × 2.2" 55-584 (S)
Pedals	Cannondale Fitness
Crank	Gates Bosch E-bike, w/ 46T sprocket
Chain	Gates CDX high performance carbon drive belt
Rear Cogs	Gates CDX, 34T
Shifters	Shimano Nexus Revoshift, 5-speed twist shifter
Handlebar	Cannondale Urban Backsweep
Grips	Cannondale Ergo Fitness Dual Density, Lock-on
Stem	Cannondale Urban, adjustable, internal cable routing
Headset	Integrated Sealed Bearing, Tapered, internal cable routing
Brakes	Shimano MT400 hydraulic disc, 203/203mm RT64 rotors
Brake Levers	Shimano MT401 hydraulic disc
Saddle	Selle Royale Essenza
Seatpost	Cannondale 4, 6061 Alloy, 31.6
Sizes	SM, MD, LG, XL
Color 1	Mercury (MRC)
Color 2	Barbecue (BBQ)
Extras	Integrated headtube running light, Axa Compactline 35E front light, Axa Blueline rear light, Abus framelock (key-matched with battery lock), Cannondale Urban rear rack (25kg, Racktime compatible), full-coverage fenders

Mavaro Neo 2 Low Step-Thru

Color 1 - Candy Red

Color 2 - Barbecue



NEW INNOVATION

* Until further notice



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C64252U

Frame	SmartForm C1 Alloy, low step-thru, removable 750Wh downtube battery, integrated front running light, tapered headtube, internal cable routing, 135mm QR hub spacing, IS disc mount, motor protection
Fork	All-New Cannondale HeadShok, 50mm travel, Quad Cage needle bearing internals, coil spring, twin chamber semi open-bath oil damping, post mount disc, 110×15mm thru-axle
Drive Unit	Bosch Performance Line CX 250W
Battery	Bosch Power Tube 750W
Display	Bosch Kiox 300 / LED remote
Charger	Bosch 4A
Rims	WTB STX i30 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle, (R) Nexus 5-speed internal gear hub
Spokes	Stainless Steel, 14g
Tires	Continental Contact Cruiser, 29 × 2.2" 55-622 (L/XL), Urban Contact 27.5 × 2.2" 55-584 (S/M)
Pedals	Cannondale Fitness
Crank	Gates Bosch E-bike, w/ 46T sprocket
Chain	Gates CDX high performance carbon drive belt
Rear Cogs	Gates CDX, 34T
Shifters	Shimano Nexus Revoshift, 5-speed twist shifter
Handlebar	Cannondale Urban Backsweep
Grips	Cannondale Ergo Fitness Dual Density, Lock-on
Stem	Cannondale Urban, adjustable, internal cable routing
Headset	Integrated Sealed Bearing, Tapered, internal cable routing
Brakes	Shimano MT400 hydraulic disc, 203/203mm RT64 rotors
Brake Levers	Shimano MT401 hydraulic disc
Saddle	Selle Royale Essenza
Seatpost	Cannondale 4, 6061 Alloy, 31.6
Sizes	S/M, L/XL
Color 1	Candy Red (CRD)
Color 2	Barbecue (BBQ)
Extras	Integrated headtube running light, Axa Compactline 35E front light, Axa Blueline rear light, Abus framelock (key-matched with battery lock), Cannondale Urban rear rack (25kg, Racktime compatible), full-coverage fenders

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Mavaro Neo 3

Color 1 - Black Pearl

Color 2 - Rose Gold





Specifications

C64301U

Frame	Mavaro Neo Si SmartForm C1 Alloy step-thru frame, removable downtube battery, fully internal cable routing, 135×9mm sliding dropout, post mount disc, headtube waterbottle mounts, integrated daytime running light, HDT child seat/cargo mount compatible
Fork	HeadShok DL50, 50mm, Isolated Damper Technology, OPI, 15×100 thru-axle
Drive Unit	Bosch Performance Line CX 250W
Battery	Bosch PowerTube 625Wh
Display	Bosch Purion
Charger	Bosch 4A
Rims	Cannondale 2, Double wall
Hubs	(F) Shimano MT400, 15×100mm thru-axle / (R) Shimano Tourney, QR
Spokes	DT Swiss Champion
Tires	Schwalbe Big Ben, 28 × 2.00" (50-622), GreenGuard puncture protection, reflective sidewalls
Pedals	Cannondale Urban
Crank	FSA Bosch E-Bike, 38T
Chain	Shimano Deore, 10-speed
Rear Cogs	Shimano HG500, 11-42, 10-speed
Rear Derailleur	Shimano Deore M4100
Shifters	Shimano Deore M4100, 10-speed
Handlebar	Cannondale E-Series Alloy, ergo backsweep, 680mm
Grips	Cannondale Ergo Performance, Lock-On
Stem	Cannondale 1 Adjustable Si Stem w/ Integrated Cable Routing and SP-connect Mount
Headset	Cannondale HeadShok
Brakes	Shimano MT200 hydraulic disc, 180/160mm RT30 rotors
Brake Levers	Shimano MT200 hydraulic disc
Saddle	Selle Royal Wave
Seatpost	Cannondale 4, 6061 Alloy, 31.6, 300 (SM), 350mm (MD), 400mm (XL)
Sizes	SM, MD, LG
Color 1	Black Pearl (BPL)
Color 2	Rose Gold (RGD)
Extras	Axa Compactline 35E front light, Axa Blueline rear light, Tubus rear rack - Racktime compatible, Wingee fenders, ABUS Pro Shield frame lock

Mavaro Neo 4

Color 1 - Midnight Blue

Color 2 - Rally Red





Specifications

C64401U

Frame	Mavaro Neo Si SmartForm C1 Alloy step-thru frame, removable downtube battery, fully internal cable routing, 135×9mm sliding dropout, post mount disc, headtube waterbottle mounts, integrated daytime running light, HDT child seat/cargo mount compatible
Fork	HeadShok DL50, 50mm, Isolated Damper Technology, OPI, 15×100 thru-axle
Drive Unit	Bosch Performance Line 250W
Battery	Bosch PowerTube 625Wh
Display	Bosch Purion
Charger	Bosch 4A
Rims	Cannondale 2, Double wall
Hubs	(F) Shimano MT400, 15×100mm thru-axle / (R) Shimano Nexus, 8-speed internal hub
Spokes	DT Swiss Champion
Tires	Schwalbe Big Ben, 28 × 2.00" (50-622), K-Guard puncture protection, reflective sidewalls
Pedals	Cannondale Urban
Crank	Gates Bosch E-bike, w/ 46T sprocket
Chain	Gates CDX belt
Rear Cogs	Gates CDX, 22T
Rear Derailleur	Shimano Nexus, 8-speed internal gear hub
Shifters	Shimano Nexus, Revo, 8-speed
Handlebar	Cannondale E-Series Alloy, ergo backsweep, 680mm
Grips	Cannondale Ergo Performance, Lock-On
Stem	Cannondale 1 Adjustable Si Stem w/ Integrated Cable Routing and SP-connect Mount
Headset	Cannondale HeadShok
Brakes	TRP Slate G4 4 Piston hydraulic disc, 180/160mm rotors
Brake Levers	TRP hydraulic disc
Saddle	Selle Royal Wave
Seatpost	Cannondale 4, 6061 Alloy, 31.6, 300 (SM), 350mm (MD), 400mm (XL)
Sizes	SM, MD, LG
Color 1	Midnight Blue (MDN)
Color 2	Rally Red (RRD)
Extras	Axa Compactline 35E front light, Axa Blueline rear light, Tubus rear rack - Racktime compatible, Wingee fenders, ABUS Pro Shield frame lock

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Mavaro Neo 5 Plus

Color 1 - Black Pearl

Color 2 - Cashmere





Specifications

C64551U

Frame	Mavaro Neo Si SmartForm C1 Alloy step-thru frame, removable downtube battery, fully internal cable routing, 135×9mm sliding dropout, post mount disc, headtube waterbottle mounts, integrated daytime running light, HDT child seat/cargo mount compatible
Fork	HeadShok DL50, 50mm, Isolated Damper Technology, OPI, 15×100 thru-axle
Drive Unit	Bosch Active Line Plus 250W
Battery	Bosch PowerTube 625Wh
Display	Bosch Purion
Charger	Bosch 2A
Rims	Cannondale 2, Double wall
Hubs	(F) Shimano MT400, 15×100mm thru-axle / (R) Shimano QR
Spokes	DT Swiss Champion
Tires	Schwalbe Big Ben, 28 × 2.00" (50-622), K-Guard puncture protection, reflective sidewalls
Pedals	Cannondale Urban
Crank	FSA Bosch E-Bike, 38T
Chain	Shimano Deore, 10-speed
Rear Cogs	Shimano HG500, 11-42, 10-speed
Rear Derailleur	Shimano Deore M4100
Shifters	Shimano Deore M4100, 10-speed
Handlebar	Cannondale E-Series Alloy, ergo backsweep, 680mm
Grips	Cannondale Ergo Performance, Lock-On
Stem	Cannondale 1 Adjustable Si Stem w/ Integrated Cable Routing and SP-connect Mount
Headset	Cannondale HeadShok
Brakes	TRP Slate G4 4 Piston hydraulic disc, 180/160mm rotors
Brake Levers	TRP hydraulic disc
Saddle	Selle Royal Wave
Seatpost	Cannondale 4, 6061 Alloy, 31.6, 300 (SM), 350mm (MD), 400mm (LG)
Sizes	SM, MD, LG
Color 1	Black Pearl (BPL)
Color 2	Cashmere (CAS)
Extras	Axa Compactline 35E front light, Axa Blueline rear light, Rear rack - Atran Velo compatible, Wingee fenders, ABUS Pro Shield frame lock

Mavaro Neo Performance

Color 1 - Graphite



Specifications

C64650M

Frame	Cannondale Mavaro Si, SmartForm C2 Alloy, Integrated Rack
Fork	HeadShok Fatty DL50 XL, 50mm, Isolated Damper Technology, OPI
Drive Unit	Bosch Performance Cruise 250W
Battery	Bosch PowerPack 500Wh
Display	Bosch Purion
Charger	Bosch 4A
Rims	Cannondale C2, double wall
Hubs	(F) Shimano HB-TX505, 100×9mm QR front / (R) Shimano HB-TX505, 135×9mm QR
Spokes	DT Swiss Champion
Tires	Schwalbe Little Big Ben, 28 × 1.5", K-Guard puncture protection, reflective sidewalls
Pedals	Cannondale Urban Pedal
Crank	FSA Bosch E-bike, 170mm, 38T
Chain	Shimano HG54-10, 10-speed
Rear Cogs	Shimano HG50, 11-36, 10-speed
Rear Derailleur	Shimano Deore M6000
Shifters	Shimano Deore M6000, 10-speed
Handlebar	Cannondale E-Series Alloy, ergo backsweep, 680mm
Grips	Cannondale Ergo
Stem	Cannondale Adjustable HeadShok
Headset	Cannondale HeadShok
Brakes	Shimano M200 hydraulic disc, 180/160mm RT10 rotors
Brake Levers	Shimano M200 hydraulic disc
Saddle	Selle Royal Ariel
Seatpost	Cannondale C3, 6061 Alloy, 27.2 × 300mm
Sizes	52, 57, 62
Color 1	Graphite (GRA)
Extras	Lights - Herrmans MR4 front / Tubus Ivalo rear, Curana e-Series Fenders and Chainguard, Abus 5850 framelock, Cannondale Si Kickstand

Mavaro Neo Performance City

Color 1 - Graphite



Specifications

C64600U

Frame	Mavaro Si City Step-thru, SmartForm C2 Alloy, Integrated Rack
Fork	HeadShok Fatty DL50 XL, 50mm, Isolated Damper Technology, OPI
Drive Unit	Bosch Performance Cruise 250W
Battery	Bosch PowerPack 500Wh
Display	Bosch Purion
Charger	Bosch 4A
Rims	Cannondale C2, double wall
Hubs	(F) Shimano HB-TX505, 100×9mm QR front / (R) Shimano HB-TX505, 135×9mm QR
Spokes	DT Swiss Champion
Tires	Schwalbe Little Big Ben, 28 × 1.5", K-Guard puncture protection, reflective sidewalls
Pedals	Cannondale Urban Pedal
Crank	FSA Bosch E-bike, 170mm, 38T
Chain	Shimano HG54-10, 10-speed
Rear Cogs	Shimano HG50, 11-36, 10-speed
Rear Derailleur	Shimano Deore M6000
Shifters	Shimano Deore M6000, 10-speed
Handlebar	Cannondale E-Series Alloy, ergo backsweep, 680mm
Grips	Cannondale Ergo
Stem	Cannondale Adjustable HeadShok
Headset	Cannondale HeadShok
Brakes	Shimano M200 hydraulic disc, 180/160mm RT10 rotors
Brake Levers	Shimano M200 hydraulic disc
Saddle	Selle Royal Ariel
Seatpost	Cannondale C3, 6061 Alloy, 27.2 × 300mm
Sizes	44, 47, 53, 58
Color 1	Graphite (GRA)
Extras	Lights - Herrmans MR4 front / Tubus Ivalo rear, Curana e-Series Fenders and Chainguard, Abus 5850 framelock, Cannondale Si Kickstand

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Mavaro Neo Active

Color 1 - Black Pearl



Specifications

C64550M

Frame	Cannondale Mavaro Si SmartForm C2 Alloy, Integrated Rack
Fork	HeadShok Fatty DL50 XL, 50mm, Isolated Damper Technology, OPI
Drive Unit	Bosch Active Line Plus 250W
Battery	Bosch PowerPack 500Wh
Display	Bosch Purion
Charger	Bosch 4A
Rims	Cannondale C2, double wall
Hubs	(F) Shimano HB-TX505, 100×9mm QR front / (R) Shimano HB-TX505, 135×9mm QR
Spokes	DT Swiss Champion
Tires	Schwalbe Little Big Ben, 28 × 1.5", K-Guard puncture protection, reflective sidewalls
Pedals	Cannondale Urban Pedal
Crank	FSA Bosch E-bike, 170mm, 38T
Chain	Shimano HG54, 10-speed
Rear Cogs	Shimano HG50, 11-36, 10-speed
Rear Derailleur	Shimano Deore M6000
Shifters	Shimano Deore M6000, 10-speed
Handlebar	Cannondale E-Series Alloy, ergo backsweep, 680mm
Grips	Cannondale Ergo
Stem	Cannondale Adjustable HeadShok
Headset	Cannondale HeadShok
Brakes	Shimano M200 hydraulic disc, 180/160mm RT10 rotors
Brake Levers	Shimano M200 hydraulic disc
Saddle	Selle Royal Ariel
Seatpost	Cannondale C3, 6061 Alloy, 27.2 × 300mm
Sizes	52, 57, 62
Color 1	Black Pearl (BPL)
Extras	Lights - Herrmans MR4 front / Tubus Ivalo rear, Curana e-Series Fenders and Chainguard, Abus 5850 framelock, Cannondale Si Kickstand

Mavaro Neo Active City

Color 1 - Graphite



Specifications

C64500U

Frame	Cannondale Mavaro Si City SmartForm C2 Alloy, Integrated Rack
Fork	HeadShok Fatty DL50 XL, 50mm, Isolated Damper Technology, OPI
Drive Unit	Bosch Active Line Plus 250W
Battery	Bosch PowerPack 500Wh
Display	Bosch Purion
Charger	Bosch 4A
Rims	Cannondale C2, double wall
Hubs	(F) Shimano HB-TX505, 100×9mm QR front / (R) Shimano HB-TX505, 135×9mm QR
Spokes	DT Swiss Champion
Tires	Schwalbe Little Big Ben, 28 × 1.5", K-Guard puncture protection, reflective sidewalls
Pedals	Cannondale Urban Pedal
Crank	FSA Bosch E-bike, 170mm, 38T
Chain	Shimano HG54, 10-speed
Rear Cogs	Shimano HG50, 11-36, 10-speed
Rear Derailleur	Shimano Deore M6000
Shifters	Shimano Deore M6000, 10-speed
Handlebar	Cannondale E-Series Alloy, ergo backsweep, 680mm
Grips	Cannondale Ergo
Stem	Cannondale Adjustable HeadShok
Headset	Cannondale HeadShok
Brakes	Shimano M200 hydraulic disc, 180/160mm RT10 rotors
Brake Levers	Shimano M200 hydraulic disc
Saddle	Selle Royal Ariel
Seatpost	Cannondale C3, 6061 Alloy, 27.2 × 300mm
Sizes	44, 47, 53, 58
Color 1	Black Pearl (BPL)
Extras	Lights - Herrmans MR4 front / Tubus Ivalo rear, Curana e-Series Fenders and Chainguard, Abus 5850 framelock, Cannondale Si Kickstand

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Adventure Neo 1 EQ

Color 1 - Emerald Green



Specifications

C68151U

Frame	SmartForm C3 Alloy step-thru frame, removable downtube battery, fully internal cable routing, post mount disc, dual waterbottle headtube mount
Fork	SR Suntour Mobie A32, 63mm travel, coil with preload adjuster, lockout, crown light mount, 44mm offset
Drive Unit	Bosch Performance Line Cruise
Battery	Bosch PowerTube 625Wh
Display	Bosch Purion
Charger	Bosch 2A
Rims	Cannondale 2, double wall
Hubs	(F) Shimano MT400, 15×100mm thru-axle / (R) Shimano TX505, QR
Spokes	Stainless Steel, 14g
Tires	Schwalbe Hurricane Performance Addix, 27.5 × 2.25"
Pedals	Cannondale Comfort
Crank	FSA Bosch E-Bike, 38T
Chain	Shimano Deore, 10-speed
Rear Cogs	Shimano M4100, 11-42, 10-speed
Rear Derailleur	Shimano Deore M4100
Shifters	Shimano Deore M4100, 10-speed
Handlebar	Cannondale E-Series Alloy, ergo backsweep, 680mm
Grips	Cannondale Comfort
Stem	Cannondale 3 with Intellimount, Alloy, 31.8mm clamp
Headset	Semi Integrated, 1-1/8"
Brakes	Shimano MT400 hydraulic disc, 180/160mm RT30 rotors
Brake Levers	Shimano MT400 hydraulic disc
Saddle	Cannondale Adventure Neo, 170mm, steel rails
Seatpost	Cane Creek Thudbuster G4 suspension post, 31.6, 375mm (S), 430mm (L)
Connectivity	Cannondale Wheel Sensor
Sizes	SM, LG
Color 1	Emerald Green (EMR)
Extras	Premium front and rear lights, premium fenders, rear carrier, Garmin radar

Adventure Neo 2 EQ

Color 1 - Sage Gray

Color 2 - Sage



Specifications

C68251U

Frame	SmartForm C3 Alloy step-thru frame, removable downtube battery, fully internal cable routing, post mount disc, dual waterbottle headtube mount
Fork	SR Suntour Mobie A32, 63mm travel, coil with preload adjuster, lockout, crown light mount, 44mm offset
Drive Unit	Bosch Active Line Plus
Battery	Bosch PowerTube 500Wh
Display	Bosch Purion
Charger	Bosch 2A
Rims	Cannondale 2, double wall
Hubs	(F) Shimano MT400, 15×100mm thru-axle / (R) Shimano TX505, QR
Spokes	Stainless Steel, 14g
Tires	Kenda Kwick Seven.5, 27.5 × 2.20"
Pedals	Cannondale Comfort
Crank	FSA Bosch E-Bike, 38T
Chain	Shimano HG93, 9-speed
Rear Cogs	Shimano HG200 11-36, 9-speed
Rear Derailleur	Shimano Alivio
Shifters	Shimano Alivio, 9-speed
Handlebar	Cannondale E-Series Alloy, ergo backsweep, 680mm
Grips	Cannondale Comfort
Stem	Cannondale 3 with Intellimount, Alloy, 31.8mm clamp
Headset	Semi Integrated, 1-1/8"
Brakes	Shimano MT200 hydraulic disc, 180/160mm RT10 rotors
Brake Levers	Shimano MT200 hydraulic disc
Saddle	Cannondale Adventure Neo, 170mm, steel rails
Seatpost	Cane Creek Thudbuster G4 suspension post, 31.6, 375mm (S), 430mm (L)
Connectivity	Cannondale Wheel Sensor
Sizes	SM, LG
Color 1	Sage Gray (SGG)
Color 2	Sage (SGE)
Extras	Front and rear lights, premium fenders, rear carrier

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Adventure Neo 3.1 EQ

Color 1 - Jet Black

Color 2 - Dusty Blue



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C68321U

Frame	SmartForm C3 Alloy step-thru frame, removable downtube battery, fully internal cable routing, post mount disc, dual waterbottle headtube mount
Fork	SmartForm C3 Alloy blades, 1-1/8" steerer, post mount disc, mid-blade rack/fender mounts, crown accessory mount, 45mm offset
Drive Unit	Bosch Active Line Plus
Battery	Bosch PowerTube 400Wh
Display	Bosch Purion
Charger	Bosch 2A
Rims	Cannondale 2, double wall
Hubs	(F) Formula DC-51, 15×100mm thru-axle / (R) Formula DC-1422, QR
Spokes	Stainless Steel, 14g
Tires	Kenda Kwick Seven.5, 27.5 × 2.20"
Pedals	Cannondale Comfort
Crank	FSA Bosch E-Bike, 38T
Chain	Shimano HG93, 9-speed
Rear Cogs	Shimano HG200, 11-36, 9-speed
Rear Derailleur	Shimano Altus
Shifters	Shimano Altus, 9-speed
Handlebar	Cannondale E-Series Alloy, ergo backsweep, 680mm
Grips	Cannondale Comfort
Stem	Cannondale 3 with Intellimount, Alloy, 31.8mm clamp
Headset	Semi Integrated, 1-1/8"
Brakes	Riderever hydraulic disc, 180/160mm rotors
Brake Levers	Riderever hydraulic disc
Saddle	Cannondale Ergo Comfort
Seatpost	TranzX, suspension dropper post, 31.6, 50mm travel
Sizes	SM, LG
Color 1	Jet Black (BLK)
Color 2	Dusty Blue (DBU)
Extras	Front and rear lights, fenders, rear carrier

Adventure Neo 4

Color 1 - Charcoal Grey

Color 2 - Mango



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C68451U

Frame	SmartForm C3 Alloy step-thru frame, removable downtube battery, fully internal cable routing, post mount disc, dual waterbottle headtube mount
Fork	SmartForm C3 Alloy blades, 1-1/8" steerer, post mount disc, mid-blade rack/fender mounts, crown accessory mount, 45mm offset
Drive Unit	Bosch Active Line
Battery	Bosch PowerTube 400Wh
Display	Bosch Purion
Charger	Bosch 2A
Rims	Cannondale 2, double wall
Hubs	(F) Formula DC-1420, QR / (R) Formula DC-1422, QR
Spokes	Stainless Steel, 14g
Tires	Kenda Kwick Seven.5, 27.5 × 2.20"
Pedals	Cannondale Comfort
Crank	FSA Bosch E-Bike, 38T
Chain	Shimano HG93, 9-speed
Rear Cogs	Shimano HG200, 11-36, 9-speed
Rear Derailleur	Shimano Altus
Shifters	Shimano Altus, 9-speed
Handlebar	Cannondale E-Series Alloy, ergo backsweep, 680mm
Grips	Cannondale Comfort
Stem	Cannondale 3 with Intellimount, Alloy, 31.8mm clamp
Headset	Semi Integrated, 1-1/8"
Brakes	Riderever hydraulic disc, 180/160mm rotors
Brake Levers	Riderever hydraulic disc
Saddle	Cannondale Ergo Comfort
Seatpost	Cannondale 4, 6061 Alloy, 31.6 × 350mm
Sizes	SM, LG
Color 1	Charcoal Grey (GRY)
Color 2	Mango (MGO)
Extras	Lezyne Super HB STVZO E1000 w/ remote high beam switch

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Moterra Neo EQ

Color 1 - Black Pearl

Color 2 - Agave



NEW INNOVATION

* Until further notice



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C65311U

Frame	Moterra Neo, SmartForm C1 Alloy, 130mm travel, Proportional Response Tuned Suspension, removable downtube battery, injected molded skid plate, 55mm chainline, internal cable routing, 148×12mm thru-axle, UDH hanger, post mount brake, tapered headtube, 18mm two-bolt kickstand mount, integrated rear rack
Fork	RockShox 35 Silver R, 150mm, Coil, 15×110mm thru-axle, tapered steerer, 44mm offset, rack and fender compatible
Rear Shock	RockShox Deluxe Select, DebonAir
Drive Unit	Bosch Performance Line CX 250W
Battery	Bosch PowerTube 750Wh
Display	Bosch Kiox 300 w/ LED remote
Charger	Bosch 4A
Rims	WTB ST i30 TCS, 32h, tubeless ready
Hubs	(F) Formula 15×110mm thru-axle / (R) Shimano MT410, 12×148mm thru-axle
Spokes	Stainless Steel, 14g
Tires	Continental eRuban, 29 × 2.3"
Pedals	Not included
Crank	FSA Bosch E-bike w/ 55mm chainline, 160mm, 34T

Chain	Shimano Deore 6100, 12-speed
Rear Cogs	Shimano Deore M6100, 10-51, 12-speed
Rear Derailleur	Shimano XT
Shifters	Shimano Deore M6100, 12-speed
Handlebar	Cannondale 3 Riser, Alloy, 25mm rise, 8° sweep, 5° rise, 780mm
Grips	Fabric FunGuy
Stem	Cannondale 2, 6061 Alloy, 35mm, 0°
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano MT420 4-piston hydraulic disc, 203/203mm RT66/64 rotors
Brake Levers	Shimano MT400 hydraulic disc
Saddle	Fabric Scoop Shallow Sport, steel rails
Seatpost	Cannondale DownLow Dropper, internal routing, 31.6, 125mm (S), 150mm (M-XL)
Sizes	SM,MD,LG,XL
Color 1	Black Pearl (BPL)
Color 2	Agave (AGV)
Extras	Cannondale E-bike lights by Lezyne - Foresite 350 headlight, Hindsite E25 taillight - kickstand, alloy full coverage fenders, Moterra Rack - Racktime compatible, 25kg max.

Tesoro Neo X Speed

Color 1 - Grey



Specifications

C66101M

Frame	SmartForm C1 Alloy, Dual Battery ready, removable downtube battery, SAVE, tapered headtube, internal cable routing, Ai offset drivetrain, 148×12mm thru-axle, post mount disc, integrated speed sensor, KickFlip hidden kickstand mount, motor protection, rack/fendor mount, lock mount
Fork	SR Suntour Raidon 34, 100mm, 15×110, 46mm offset
Drive Unit	Bosch Performance Line Speed 250W (45kph)
Battery	Bosch PowerTube 625Wh
Display	Bosch Kiox
Charger	Bosch 4A
Rims	WTB STX i30 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle / (R) Shimano MT510 12×148mm thru-axle
Spokes	Stainless steel, 14g
Tires	Schwalbe Big Ben Plus Performance, Green Guard, Snake Skin, 55-622 – 28×2.15"
Pedals	Cannondale Fitness
Crank	FSA Bosch E-Bike w/ custom Ai offset, 46T
Chain	KMC X12, 12-speed
Rear Cogs	Shimano Deore M6100, 10-51, 12-speed
Rear Derailleur	Shimano Deore
Shifters	Shimano Deore M6100, 12-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 740mm
Grips	Cannondale Ergo Fitness Dual Density, Lock-On
Stem	Cannondale Adjustable, A-headset, 31.8mm
Headset	Integrated Sealed Bearing, Tapered
Brakes	Magura MT5 hydraulic disc, 203/203mm Storm rotors
Brake Levers	Magura MTnext "e" w/ brake light switch
Saddle	Cannondale Ergo Touring
Seatpost	Parallelogram Suspension Seatpost, 31.6
Sizes	SM, MD, LG, XL
Color 1	Grey (GRY)
Extras	Supernova M99 Mini Pro-45 High Beam, Supernova M99 Tail Light, Supernova Horn, Tubus Rack - Racktime compatible, Wingee Fenders

Tesoro Neo X 1

Color 1 - Midnight

Color 2 - Charcoal Gray



Specifications

C66202M

Frame	SmartForm C1 Alloy, removable 750Wh downtube battery, integrated front running light, tapered headtube, internal cable routing, 135mm QR hub spacing, IS disc mount, motor protection
Fork	SR Suntour XCR34, 100mm, coil, boost spacing, offset - 44mm (S) / 51mm (M, L, XL)
Drive Unit	Bosch Performance Line CX 250W
Battery	Bosch PowerTube 750Wh
Display	Bosch Kiox 300 / LED remote
Charger	Bosch 4A
Rims	WTB STX i30 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle, (R) Shimano R600, 32H, QR
Spokes	Stainless Steel, 14g
Tires	Maxxis Pace 29×2.1" 53-622 (M,L,XL) / 27.5×2.1" 53-584 (S)
Pedals	Cannondale Fitness
Crank	Bosch Gen4, 38T
Chain	LinkGlide, 10-speed
Rear Cogs	Shimano Deore LinkGlide, 11-43, 10-speed
Rear Derailleur	Shimano Deore LinkGlide Shadow RD+
Shifters	Shimano Deore LinkGlide, 10-speed
Handlebar	Cannondale Trekking
Grips	Cannondale Ergo Fitness Dual Density, Lock-on
Stem	Cannondale Urban, adjustable, internal cable routing
Headset	Integrated Sealed Bearing, Tapered, internal cable routing
Brakes	Magura CT 2-piston hydraulic disc, MDR-C rotors, 203mm/180mm
Brake Levers	Magura CT hydraulic disc
Saddle	Selle Royale Lookin
Seatpost	Parallelogram Suspension Seatpost, 31.6, 300mm (SM), 350mm (MD), 400mm (LG, XL)
Sizes	SM, MD, LG, XL
Color 1	Midnight (MDN)
Color 2	Charcoal Gray (GRY)
Extras	Integrated headtube running light, Tubus rear rack (25kg, Racktime compatible), Curana Apollo fenders, Axa Blueline 30 headlight / Blueline taillight), kickstand, Abus 4650X frame lock (key-matched with battery lock)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Tesoro Neo X 1 Low Step-Thru

Color 1 - Agave

Color 2 - Charcoal Gray



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C64232U

Frame	SmartForm C1 Alloy, low step-thru, removable 750Wh downtube battery, integrated front running light, tapered headtube, internal cable routing, 135mm QR hub spacing, IS disc mount, motor protection
Fork	SR Suntour XCR34, 100mm, coil, boost spacing, offset - 44mm (S/M) / 51mm (L/X)
Drive Unit	Bosch Performance Line CX 250W
Battery	Bosch PowerTube 750Wh
Display	Bosch Kiox 300 / LED remote
Charger	Bosch 4A
Rims	WTB STX i30 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle, (R) Shimano R600, 32H, QR
Spokes	Stainless Steel, 14g
Tires	Maxxis Pace 29×2.1" 53-622 (LG/XL) / 27.5×2.1" 53-584 (SM/MD)
Pedals	Cannondale Fitness
Crank	Bosch Gen4, 38T
Chain	LinkGlide 10-speed
Rear Cogs	Shimano Deore LinkGlide, 11-43, 10-speed
Rear Derailleur	Shimano Deore LinkGlide Shadow RD+
Shifters	Shimano Deore LinkGlide, 10-speed
Handlebar	Cannondale Trekking
Grips	Cannondale Ergo Fitness Dual Density, Lock-on
Stem	Cannondale Urban, adjustable, internal cable routing
Headset	Integrated Sealed Bearing, Tapered, internal cable routing
Brakes	Magura CT 2-piston hydraulic disc, MDR-C rotors, 203mm/180mm
Brake Levers	Magura CT hydraulic disc
Saddle	Selle Royale Lookin
Seatpost	Parallelogram Suspension Seatpost, 31.6, 300mm (SM/MD), 400mm (LG/XL)
Sizes	S/M, L/XL
Color 1	Agave (AGV)
Color 2	Charcoal Gray (GRY)
Extras	Integrated headtube running light, Tubus rear rack (25kg, Racktime compatible), Curana Apollo fenders, Axa Blueline 30 headlight / Blueline taillight), kickstand, Abus 4650X frame lock (key-matched with battery lock)

Tesoro Neo X 1 Step-Thru

Color 1 - Lavendar

Color 2 - Charcoal Gray



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C66212U

Frame	SmartForm C1 Alloy, step-thru, removable 750Wh downtube battery, integrated front running light, tapered headtube, internal cable routing, 135mm QR hub spacing, IS disc mount, motor protection
Fork	SR Suntour XCR34, 100mm, coil, boost spacing, offset - 44mm (S) / 51mm (M, L)
Drive Unit	Bosch Performance Line CX 250W
Battery	Bosch PowerTube 750Wh
Display	Bosch Kiox 300 / LED remote
Charger	Bosch 4A
Rims	WTB STX i30 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle, (R) Shimano R600, 32H, QR
Spokes	Stainless Steel, 14g
Tires	Maxxis Pace 29×2.1" 53-622 (M,L) / 27.5×2.1" 53-584 (S)
Pedals	Cannondale Fitness
Crank	Bosch Gen4, 38T
Chain	LinkGlide 10-speed
Rear Cogs	Shimano Deore LinkGlide, 11-43, 10-speed
Rear Derailleur	Shimano Deore LinkGlide Shadow RD+
Shifters	Shimano Deore LinkGlide, 10-speed
Handlebar	Cannondale Trekking
Grips	Cannondale Ergo Fitness Dual Density, Lock-on
Stem	Cannondale Urban, adjustable, internal cable routing
Headset	Integrated Sealed Bearing, Tapered, internal cable routing
Brakes	Magura CT 2-piston hydraulic disc, MDR-C rotors, 203mm/180mm
Brake Levers	Magura CT hydraulic disc
Saddle	Selle Royale Lookin
Seatpost	Parallelogram Suspension Seatpost, 31.6, 300mm (SM), 350mm (MD), 400mm (LG)
Sizes	SM, MD, LG
Color 1	Lavender (LAV)
Color 2	Charcoal Gray (GRY)
Extras	Integrated headtube running light, Tubus rear rack (25kg, Racktime compatible), Curana Apollo fenders, Axa Blueline 30 headlight / Blueline taillight), kickstand, Abus 4650X frame lock (key-matched with battery lock)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Tesoro Neo X 2

Color 1 - Saber

Color 2 - Midnight Blue



Specifications

C66301M

Frame	SmartForm C1 Alloy, Dual Battery ready, removable downtube battery, SAVE, tapered headtube, internal cable routing, Ai offset drivetrain, 148×12mm thru-axle, post mount disc, integrated speed sensor, KickFlip hidden kickstand mount, motor protection, rack/fendor mount, lock mount
Fork	SR Suntour XCM 34 Boost, 100mm, 15×110, Coil, 51mm offset
Drive Unit	Bosch Performance Line CX 250W
Battery	Bosch PowerTube 625Wh
Display	Bosch Purion
Charger	Bosch 4A
Rims	WTB STX i30 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle / (R) Shimano MT400 12×148mm thru-axle
Spokes	DT Swiss Champion
Tires	Schwalbe G-One Allround Performance, 29 × 2.25", RaceGuard, tubeless ready
Pedals	Cannondale Fitness
Crank	FSA Bosch E-Bike w/ custom Ai offset, 38T
Chain	Shimano HG601, 11-speed
Rear Cogs	Shimano Deore 5100, 11-51, 11-speed
Rear Derailleur	Shimano Deore M5100
Shifters	Shimano Deore M5100, 11-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 740mm
Grips	Cannondale Ergo Fitness Dual Density, Lock-On
Stem	Cannondale Adjustable, A-headset, 31.8mm
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano MT200 hydraulic disc, 180/180mm RT10 rotors
Brake Levers	Shimano MT200 hydraulic disc
Saddle	Cannondale Ergo Touring
Seatpost	Suspension Seatpost - 350mm (S/M), 400mm (L/X)
Sizes	SM, MD, LG, XL
Color 1	Saber (SBR)
Color 2	Midnight Blue (MDN)
Extras	Herrmans H-Black MR4 front light, H-Trace Micro rear light, Tubus Wingee fender, Tubus rear rack (25kg max capacity)

Tesoro Neo X 2 Remixte

Color 1 - Alpine



Specifications

C66301U

Frame	Remixte Step-Thru, SmartForm C1 Alloy, removable downtube battery, SAVE, tapered headtube, internal cable routing, Ai offset drivetrain, 148×12mm thru-axle, post mount disc, integrated speed sensor, KickFlip hidden kickstand mount, motor protection, rack/fendor mount, lock mount
Fork	SR Suntour XCM 34 Boost, 100mm, 15×110, Coil, 51mm offset
Drive Unit	Bosch Performance Line CX 250W
Battery	Bosch PowerTube 625Wh
Display	Bosch Purion
Charger	Bosch 4A
Rims	WTB STX i30 TCS, 32h, tubeless ready
Hubs	(F) Shimano MT400, 15×110mm thru-axle / (R) Shimano MT400 12×148mm thru-axle
Spokes	DT Swiss Champion
Tires	Schwalbe G-One Allround Performance, 29 × 2.25", RaceGuard, tubeless ready
Pedals	Cannondale Fitness
Crank	FSA Bosch E-Bike w/ custom Ai offset, 38T
Chain	Shimano HG601, 11-speed
Rear Cogs	Shimano Deore 5100, 11-51, 11-speed
Rear Derailleur	Shimano Deore M5100
Shifters	Shimano Deore M5100, 11-speed
Handlebar	Cannondale 3, 6061 double-butted, 20mm rise, 9° back, 720mm
Grips	Cannondale Ergo Fitness Dual Density, Lock-on
Stem	Cannondale Adjustable, A-headset, 31.8mm
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano MT200 hydraulic disc, 180/180mm RT10 rotors
Brake Levers	Shimano MT200 hydraulic disc
Saddle	Cannondale Ergo Touring
Seatpost	Suspension Seatpost - 350mm (S/M), 400mm (L)
Sizes	SM, MD, LG
Color 1	Alpine (ALP)
Extras	Herrmans H-Black MR4 front light, H-Trace Micro rear light, Tubus Wingee fender, Tubus rear rack (25kg max capacity)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Tesoro Neo X 3

Color 1 - Black



Specifications

C66401M

Frame	SmartForm C2 Alloy, removable downtube battery, SAVE, tapered headtube, internal cable routing, 148×12mm thru-axle, post mount disc, motor protection, rack/fendor mount, lock mount
Fork	SR Suntour XCM ATB, 100mm, Coil, 46mm offset
Drive Unit	Bosch Performance Line 250W
Battery	Bosch PowerTube 500Wh
Display	Bosch Purion
Charger	Bosch 4A
Rims	WTB STX i29 TCS, 32h, tubeless ready
Hubs	(F) Shimano TX505, QR / (R) Shimano MT400 12×148mm thru-axle
Spokes	DT Swiss Champion
Tires	Schwalbe G-One Allround Performance, 29 × 2.25", RaceGuard, tubeless ready
Pedals	Cannondale Platform
Crank	FSA Bosch E-Bike, 38T
Chain	Shimano HG54, 10-speed
Rear Cogs	Shimano Deore M4100, 11-42, 10-speed
Rear Derailleur	Deore M4120, 10-speed
Shifters	Deore M4100, 10-speed
Handlebar	Cannondale 3 Riser, 6061 Alloy, 15mm rise, 8° sweep, 4° rise, 740mm
Grips	Cannondale Ergo Fitness Dual Density, Lock-On
Stem	Cannondale Adjustable, A-headset, 31.8mm
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano MT200 hydraulic disc, 180/180mm RT10 rotors
Brake Levers	Shimano MT200 hydraulic disc
Saddle	Cannondale Ergo Touring
Seatpost	Cannondale 4, 6061 Alloy, 31.6
Sizes	SM, MD, LG, XL
Color 1	Black (BLK)
Extras	Herrmans H-Black MR4 front light, H-Trace Micro rear light, Tubus Wingee fender, Tubus rear rack (25kg max capacity)

Tesoro Neo X 3 Remixte

Color 1 - Black



Specifications

C66401U

Frame	Remixte Step-Thru, SmartForm C2 Alloy, removable downtube battery, SAVE, tapered headtube, internal cable routing, 148×12mm thru-axle, post mount disc, motor protection, lock mount
Fork	SR Suntour XCM ATB, 100mm, Coil, 46mm offset
Drive Unit	Bosch Performance Line 250W
Battery	Bosch PowerTube 500Wh
Display	Bosch Purion
Charger	Bosch 4A
Rims	WTB STX i29 TCS, 32h, tubeless ready
Hubs	(F) Shimano TX505, QR / (R) Shimano MT400 12×148mm thru-axle
Spokes	DT Swiss Champion
Tires	Schwalbe G-One Allround Performance, 29 × 2.25", RaceGuard, tubeless ready
Pedals	Cannondale Platform
Crank	FSA Bosch E-Bike, 38T
Chain	Shimano HG54, 10-speed
Rear Cogs	Shimano Deore M4100, 11-42, 10-speed
Rear Derailleur	Shimano Deore M4120, 10-speed
Shifters	Shimano Deore M4100, 10-speed
Handlebar	Cannondale 3, 6061 double-butted, 20mm rise, 9° back, 720mm
Grips	Cannondale Ergo Fitness Dual Density, Lock-on
Stem	Cannondale Adjustable, A-headset, 31.8mm
Headset	Integrated Sealed Bearing, Tapered
Brakes	Shimano MT200 hydraulic disc, 180/180mm RT10 rotors
Brake Levers	Shimano MT200 hydraulic disc
Saddle	Cannondale Ergo Touring
Seatpost	Cannondale 4, 6061 Alloy, 31.6
Sizes	SM, MD, LG
Color 1	Black (BLK)
Extras	Herrmans H-Black MR4 front light, H-Trace Micro rear light, Tubus Wingee fender, Tubus rear rack (25kg max capacity)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Tesoro Neo SL EQ

Color 1 - Black Pearl w/ reflective graphics



Specifications

C66101U

Frame	SmartForm C3 Alloy, Internal battery, SAVE, tapered head tube, Straightshot hidden cable routing, flat mount disc, rack/fender mounts, 360° reflectivity
Fork	Full carbon, 12×100mm thru-axle, 1-1/4" to 1-1/8" tapered steerer, flat mount disc, fender mounts, 360° reflectivity
Drive Unit	Mahle ebikemotion X35 250W rear hub motor
Battery	Mahle ebikemotion X35 250Wh internal downtube battery
Display	Mahle ebikemotion iWoc ONE integrated controller, iWoc Trio, smartphone app with Intellimount stem
Charger	Mahle ebikemotion X35, 2A
Rims	Shining, 32 hole
Hubs	(F) Alloy, 15×100mm thru-axle / (R) EbikeMotion x35
Spokes	Stainless Steel (F) 14g / (R) 13g
Tires	Vittoria Terreno Zero, 700 × 35c
Pedals	Cannondale Fitness
Crank	Prowheel, 38T
Bottom Bracket	Cartridge, square taper
Chain	KMC E10T, 10-speed
Rear Cogs	microSHIFT, 11-48, 10-speed
Rear Derailleur	microSHIFT Advent X
Shifters	microSHIFT Advent X, 10-Speed
Handlebar	Cannondale Riser, 6061 Alloy, 18mm rise, 8° back, 4° up, 680mm
Grips	Cannondale Fitness Ergo Double Density
Stem	Cannondale 3 with Intellimount, Alloy, 31.8, 6°
Headset	FSA Sealed Bearing, integrated, 1-1/4"-1-1/8"
Brakes	Tektro M275 hydraulic disc, 160/160mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Fitness Ergo Double Density
Seatpost	6061 Alloy, 31.6 × 350mm
Sizes	SM, MD, LG
Color 1	Black Pearl w/ reflective graphics (BPL)
Extras	Herrmans H-Black MR8 front light / Herrmans H-trace rear light, alloy fenders, front rack (15kg max capacity), kickstand

Tesoro Neo SL EQ Remixte

Color 1 - Black Pearl w/ reflective graphics



Specifications

C66121U

Frame	Step-thru, SmartForm C3 Alloy, Internal battery, SAVE, tapered head tube, Straightshot hidden cable routing, flat mount disc, rack/fender mounts, 360° reflectivity
Fork	Full carbon, 12×100mm thru-axle, 1-1/4" to 1-1/8" tapered steerer, flat mount disc, fender mounts, 360° reflectivity
Drive Unit	Mahle ebikemotion X35 250W rear hub motor
Battery	Mahle ebikemotion X35 250Wh internal downtube battery
Display	Mahle ebikemotion iWoc ONE integrated controller, iWoc Trio, smartphone app with Intellimount stem
Charger	Mahle ebikemotion X35, 2A
Rims	Shining, 32 hole
Hubs	(F) Alloy, 15×100mm thru-axle / (R) EbikeMotion x35
Spokes	Stainless Steel (F) 14g / (R) 13g
Tires	Vittoria Terreno Zero, 700 × 35c
Pedals	Cannondale Fitness
Crank	Prowheel, 38T
Bottom Bracket	Cartridge, square taper
Chain	KMC E10T, 10-speed
Rear Cogs	microSHIFT, 11-48, 10-speed
Rear Derailleur	microSHIFT Advent X
Shifters	microSHIFT Advent X, 10-Speed
Handlebar	Cannondale Riser, 6061 Alloy, 18mm rise, 8° back, 4° up, 680mm
Grips	Cannondale Fitness Ergo Double Density
Stem	Cannondale 3 with Intellimount, Alloy, 31.8, 6°
Headset	FSA Sealed Bearing, integrated, 1-1/4"-1-1/8"
Brakes	Tektro M275 hydraulic disc, 160/160mm rotors
Brake Levers	Tektro hydraulic disc
Saddle	Cannondale Fitness Ergo Double Density
Seatpost	6061 Alloy, 31.6 × 350mm
Sizes	SM, LG
Color 1	Black Pearl w/ reflective graphics (BPL)
Extras	Herrmans H-Black MR8 front light / Herrmans H-trace rear light, alloy fenders, front rack (15kg max capacity), kickstand



Kids

Kids

Trail



Kids Trail Plus



Kids Trail

Sidewalk



Kids Trail



Kids Trail Balance

Street



Kids Quick

Kids Trail Plus 24

Color 1 - Mantis

Color 2 - Deep Teal





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C51102U

Frame	SmartForm C3 Alloy, IS disc mount, rack/fender mounts
Fork	SmartForm C3 Alloy, 1-1/8" steerer, IS disc mount
Rims	Cannondale, lightweight alloy, 24", 28h
Hubs	(F) Sealed Alloy , QR / (R) Sealed Alloy , QR, 8 sp freehub
Spokes	Steel, 14g Black
Tires	Kenda Slant Six, 24 × 2.6"
Pedals	Wellgo Composite Platform w/ reflectors, 1/2"
Crank	Prowheel, Pro-V30, 145mm length, 30T
Bottom Bracket	Cartridge, square taper
Chain	KMC Z8.1, 8-speed
Rear Cogs	Sunrace, 12-32, 8-speed

Rear Derailleur	microSHIFT M21S
Shifters	microSHIFT, 8-speed
Handlebar	Lightweight Alloy, 25.4mm, 580mm
Grips	Cannondale Kid's Comfort
Stem	Leadtec, 30mm w/ padded stem cover
Headset	FSA, Alloy, 1-1/8
Brakes	Tektro Mechanical Disc
Brake Levers	2-Finger
Saddle	Cannondale Kid's Comfort
Seatpost	One-piece, clamp-less, Alloy, 25.4mm
Sizes	OS
Color 1	Mantis (MAT)
Color 2	Deep Teal (DTE)

Kids Trail Plus 20

Color 1 - Hazard Orange

Color 2 - Salmon





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C51152U

Frame	SmartForm C3 Alloy, IS disc mount, rack/fender mounts
Fork	SmartForm C3 Alloy, 1-1/8" steerer, IS disc mount
Rims	Cannondale, lightweight alloy, 24", 28h
Hubs	(F) Sealed Alloy , QR / (R) Sealed Alloy , QR, 8 sp freehub
Spokes	Steel, 14g Black
Tires	Kenda Slant Six, 24 × 2.6"
Pedals	Wellgo Composite Platform w/ reflectors, 1/2"
Crank	Prowheel, Pro-V30, 145mm length, 30T
Bottom Bracket	Cartridge, square taper
Chain	KMC Z8.1, 8-speed
Rear Cogs	Sunrace, 12-32, 8-speed

Rear Derailleur	microSHIFT M21S
Shifters	microSHIFT, 8-speed
Handlebar	Lightweight Alloy, 25.4mm, 580mm
Grips	Cannondale Kid's Comfort
Stem	Leadtec, 30mm w/ padded stem cover
Headset	FSA, Alloy, 1-1/8
Brakes	Tektro Mechanical Disc
Brake Levers	2-Finger
Saddle	Cannondale Kid's Comfort
Seatpost	One-piece, clamp-less, Alloy, 25.4mm
Sizes	OS
Color 1	Mantis (MAT)
Color 2	Deep Teal (DTE)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Trail 26

Color 1 - Black Pearl

Color 2 - Purple Haze





Specifications

C51101U

Frame	All-New, SmartForm C3 Alloy, StraightShot hidden cable routing, disc brakes, rack/fender mounts
Fork	Suntour NEX, 63mm, coil with preload adjuster
Rims	Cannondale Disc, double wall w/eyelet, 32h
Hubs	(F) Sealed Alloy Disc, 12×100mm / (R) Sealed Alloy Disc
Spokes	Stainless steel, 14g
Tires	Kenda Small Block 8, 26 × 1.95
Pedals	Wellgo Composite Platform
Crank	Prowheel, Pro-V30, 152 mm length, 30T
Bottom Bracket	Cartridge, square taper
Chain	KMC X8, 8-speed
Rear Cogs	Sunrace, 11-34, 8-speed
Rear Derailleur	microSHIFT M26L
Shifters	microSHIFT, 8-speed
Handlebar	6061 Alloy, 25mm rise, 10° sweep, 30mm rise, 580mm
Grips	Cannondale Performance
Stem	Alloy Ahead, 31.8mm
Headset	Semi-Integrated, 1-1/8"
Brakes	Tektro Mechanical Disc, 160/160mm rotors
Brake Levers	Promax BL81
Saddle	Cannondale Ergo
Seatpost	Alloy, 25.4mm
Sizes	One Size
Color 1	Black Pearl (BPL)
Color 2	Purple Haze (PRH)
Extras	Kickstand

Kids Trail 24

Color 1 - Rally Red

Color 2 - Midnight Blue





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C51602U

Frame	SmartForm C3 Alloy, rim brakes, rack/fender mounts
Fork	SunTour XCT-JR 24, 50mm travel, 1-1/8" steerer, coil, w/ canti mounts
Rear Shock	Null
Rims	Cannondale, lightweight alloy, 24", 28h
Hubs	(F) Sealed Alloy , QR / (R) Sealed Alloy , QR, 8 sp freehub
Spokes	Steel, 14g Black
Tires	Kenda Small Block 8, 24 × 1.95"
Pedals	Wellgo Composite Platform w/ reflectors, 1/2"
Crank	Prowheel, Pro-V30, 145mm length, 30T
Bottom Bracket	Cartridge, square taper
Chain	KMC Z8.1, 8-speed
Rear Cogs	Sunrace, 12-32, 8-speed
Front Derailleur	Null
Rear Derailleur	microSHIFT M21S
Shifters	microSHIFT, 8-speed
Handlebar	Lightweight Alloy, 25.4mm, 580mm
Grips	Cannondale Kid's Comfort
Stem	Leadtec, 30mm w/ padded stem cover
Headset	FSA, Alloy, 1-1/8
Brakes	Promax V-Brake
Brake Levers	2-Finger
Saddle	Cannondale Kid's Comfort
Seatpost	One-piece, clamp-less, Alloy, 25.4mm
Sizes	OS
Color 1	Rally Red (RRD)
Color 2	Midnight Blue (MDN)
Extras	Kickstand

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Kids Trail 20

Color 1 - Electric Blue

Color 2 - Volt



Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C51652U

Frame	SmartForm C3 Alloy, rim brakes, rack/fender mounts
Fork	SunTour XCT-JR 20, 40mm travel, 1-1/8" steerer, coil, w/ canti mounts
Rims	Cannondale, lightweight alloy, 20", 28h
Hubs	(F) KT Alloy, nutted axle / (R) KT Alloy, 7-speed freehub
Spokes	Steel, 14g Black
Tires	Innova 20 × 1.95", multi-use tread
Pedals	Wellgo Composite Platform w/ reflectors, 1/2"
Crank	Prowheel, Pro-V30, 130mm length, 30T
Bottom Bracket	Cartridge, square taper
Chain	KMC Z7, 7-speed
Rear Cogs	Sunrace, 14-28, 7-speed FW
Rear Derailleur	microSHIFT M21S
Shifters	microSHIFT, Low-torque Twist Shift, 7-speed
Handlebar	Lightweight Alloy, 25.4mm, 580mm
Grips	Cannondale Kid's Comfort
Stem	Leadtec, 30mm w/ padded stem cover
Headset	FSA, Alloy, 1-1/8
Brakes	Promax V-Brake
Brake Levers	2-Finger
Saddle	Cannondale Kid's Comfort
Seatpost	One-piece, clamp-less, Alloy, 25.4mm
Sizes	OS
Color 1	Electric Blue (ELB)
Color 2	Volt (VLT)
Extras	Kickstand

Kids Trail Single Speed 20

Color 1 - Black Pearl

Color 2 - Chlorine Blue





Specifications

C51252U

Frame	SmartForm C3 Alloy, rim brakes, rack/fender mounts
Fork	Rigid, steel, 1" steerer, rim brakes
Rims	Cannondale, lightweight alloy, 20", 28h
Hubs	(F) Alloy, nutted axle / (R) Alloy, nutted axles, freewheel
Spokes	Steel, 14g Black
Tires	Innova, 20 × 2.25", multi-use tread
Pedals	Wellgo Composite Platform w/ reflectors, 1/2"
Crank	One-piece, 120mm length, 32T
Bottom Bracket	Included
Chain	KMC S1, 1/2×1/8"
Rear Cogs	16T
Handlebar	Lightweight Alloy, 25.4mm, 560mm
Grips	Cannondale Kid's Comfort
Stem	Leadtec, 30mm w/ padded stem cover
Headset	1" Ahead
Brakes	Promax V-Brake
Brake Levers	2-Finger
Saddle	Cannondale Kid's Comfort
Seatpost	One-piece, clamp-less, Alloy, 25.4mm
Sizes	OS
Color 1	Black Pearl (BPL)
Color 2	Chlorine Blue (CBU)
Extras	Kickstand, Full Coverage Chainguard


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Kids Trail Single Speed 16

Color 2 - Destiny Pink

Color 3 - Electric Blue



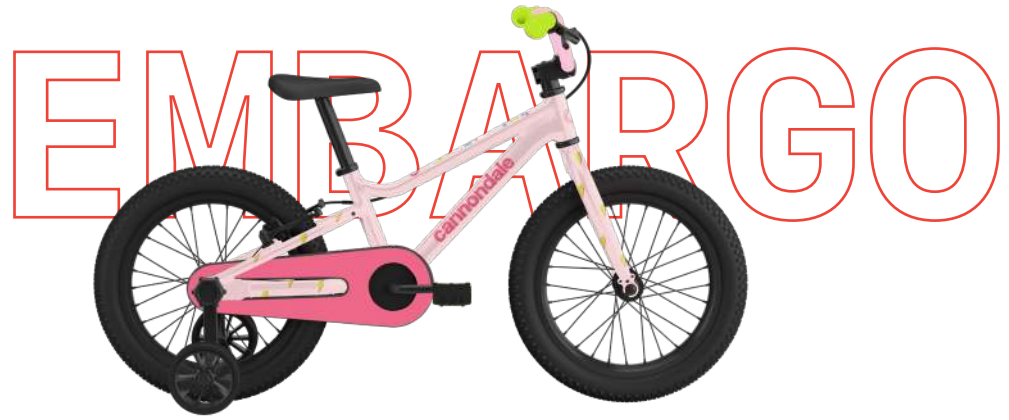

Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C51352U

Frame	SmartForm C3 Alloy, rim brakes, rack/fender mounts
Fork	Rigid, steel, 1" steerer, rim brakes
Rims	Cannondale 4, lightweight alloy, 16", 28h
Hubs	(F) Alloy, nutted axle / (R) Alloy, nutted axles, freewheel
Spokes	Steel, 14g Black
Tires	Innova, 16 × 2.25", multi-use tread
Pedals	Wellgo Composite Platform w/ reflectors, 1/2"
Crank	One-piece, 110mm length, 28T
Bottom Bracket	Included
Chain	KMC S1, 1/2×1/8"
Rear Cogs	16T

Handlebar	Lightweight Alloy, 25.4mm, 500mm
Grips	Cannondale Kid's Comfort
Stem	Leadtec, 30mm w/ padded stem cover
Headset	1" Ahead
Brakes	Promax V-Brake
Brake Levers	2-Finger
Saddle	Cannondale Kid's Comfort
Seatpost	One-piece, clamp-less, Alloy, 25.4mm
Sizes	OS
Color 2	Destiny Pink (DPK)
Color 3	Electric Blue (ELB)
Extras	Tool-less training wheels, Full Coverage Chainguard

Kids Trail 12

Color 1 - Flamingos

Color 2 - Cannondale Green





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C51402U

Frame	SmartForm C3 Alloy, coaster brake, rack/fender mounts
Fork	Rigid, steel, 1" steerer
Rims	Cannondale, lightweight alloy, 12", 16h
Hubs	(F) Alloy, nutted axle / (R) Alloy, nutted axles, coaster brake
Spokes	Steel, 14g Black
Tires	Innova, 12 × 2.125", multi-use tread
Pedals	Wellgo Composite Platform w/ reflectors, 1/2"
Crank	One-piece, 90mm length, 24T
Bottom Bracket	Included
Chain	KMC S1, 1/2×1/8"
Rear Cogs	16T


Handlebar	Lightweight Alloy, 25.4mm, 460mm
Grips	Cannondale Kid's Comfort
Stem	Leadtec, 30mm w/ Padded Stem Cover
Headset	1" Ahead, semi-integrated
Brakes	Rear coaster brake
Saddle	Cannondale Kid's Comfort
Seatpost	One-piece, clamp-less, Alloy, 25.4mm
Sizes	OS
Color 1	Flamingos (FLM)
Color 2	Cannondale Green (GRN)
Extras	Tool-less training wheels, Full Coverage Chainguard

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Kids Trail Balance 12

Color 2 - Electric Blue

Color 3 - Nitro Yelllow

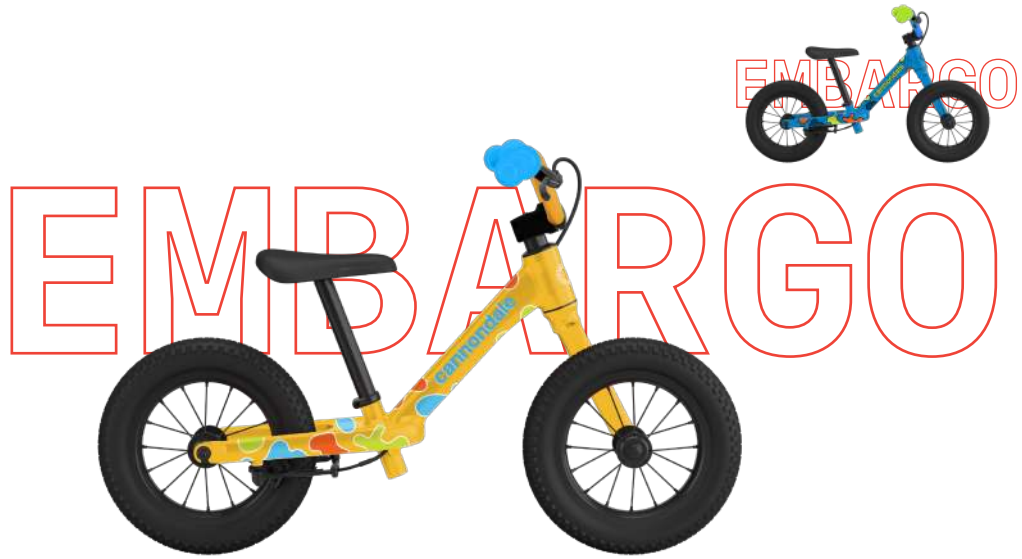

Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C51502U

Frame	SmartForm C3 Alloy, easy low step
Fork	Cannondale Little Lefty 12, rigid, SmartForm C3 Alloy, 1-1/8" steerer
Rear Shock	Null
Rims	Cannondale, lightweight alloy, 12", 16h
Hubs	(F) Little Lefty single-sided / (R) Alloy, nutted axle
Spokes	Steel, 14g Black
Tires	Innova, 12 × 2.125", multi-use tread
Handlebar	Lightweight Alloy, 25.4mm, 460mm
Grips	Cannondale Kid's Comfort

Stem	Leadtec, 30mm w/ padded stem cover
Headset	FSA, Alloy, 1-1/8" Ahead, semi-integrated
Brakes	Promax V-Brake
Brake Levers	2-Finger
Saddle	Cannondale Kid's Comfort
Seatpost	One-piece, clamp-less, Alloy, 25.4mm
Sizes	OS
Color 2	Electric Blue (FLM)
Color 3	Nitro Yellow (NIT)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022

Kids Quick 24

Color 1 - Abyss

Color 2 - Iridescent





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C51702U

Frame	SmartForm C3 Alloy, rim brakes, rack/fender mounts
Fork	SmartForm C3 Alloy, rim brakes, rack/fender mounts
Rims	Cannondale, lightweight alloy, 24", 28h
Hubs	(F) KT Alloy, QR / (R) KT Alloy, 7-speed freehub
Spokes	Steel, 14g Black
Tires	Kenda, Small Block 8, 24 × 1.5"
Pedals	Wellgo Composite Platform w/ reflectors, 1/2"
Crank	Prowheel, Pro-V30, 145mm length, 30T
Bottom Bracket	Cartridge, square taper
Chain	KMC Z7, 7-speed
Rear Cogs	Sunrace, 11-28, 7-speed
Rear Derailleur	microSHIFT M21S

Shifters	microSHIFT, Low-torque Twist Shift, 7-speed
Handlebar	Lightweight Alloy, 25.4mm, 580mm
Grips	Cannondale Kid's Comfort
Stem	Leadtec, 30mm w/ padded stem cover
Headset	FSA, Alloy, 1-1/8" Ahead, semi-integrated
Brakes	Promax V-Brake
Brake Levers	2-Finger
Saddle	Cannondale Kid's Comfort
Seatpost	One-piece, clamp-less, Alloy, 25.4mm
Sizes	OS
Color 1	Abyss (ABB)
Color 2	Iridescent (IRD)
Extras	Kickstand

Kids Quick 20

Color 1 - Mango

Color 2 - Orchid





Rendering intended to show color and graphics only, and does not reflect the model's specifications.

Specifications

C51752U

Frame	SmartForm C3 Alloy, rim brakes, rack/fender mounts
Fork	SmartForm C3 Alloy, rim brakes, rack/fender mounts
Rims	Cannondale, lightweight alloy, 20", 28h
Hubs	(F) KT Alloy, QR / (R) KT Alloy, 7-speed freehub
Spokes	Steel, 14g Black
Tires	Kenda Small Block 8, 20 × 1.5"
Pedals	Wellgo Composite Platform w/ reflectors, 1/2"
Crank	Prowheel, Pro-V30, 110mm length, 30T
Bottom Bracket	Cartridge, square taper
Chain	KMC Z7, 7-speed
Rear Cogs	Sunrace, 11-28, 7-speed
Rear Derailleur	microSHIFT M21S

Shifters	microSHIFT, Low-torque Twist Shift, 7-speed
Handlebar	Lightweight Alloy, 25.4mm, 580mm
Grips	Cannondale Kid's Comfort
Stem	Leadtec, 30mm w/ padded stem cover
Headset	FSA, Alloy, 1-1/8
Brakes	Promax V-Brake
Brake Levers	2-Finger
Saddle	Cannondale Kid's Comfort
Seatpost	One-piece, clamp-less, Alloy, 25.4mm
Sizes	OS
Color 1	Mango (MGO)
Color 2	Orchid (ORC)
Extras	Kickstand

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. WWW.CANNONDALE.COM / © CYCLING SPORTS GROUP, INC. / 2022



COME RIDE WITH US.

WWW.CANNONDALE.COM
©2022 CYCLING SPORTS GROUP, INC.